


Lead Free Brass Ball Valves

2 Piece, Full Port, Push Fit Connection, 200 WOG

JFPG-100

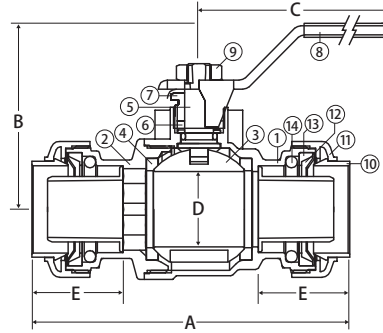

FEATURES

- Dezincification Resistant Brass Alloy
- Gland Follower and Single O-Ring Stem Design
- Easy to Connect and Fit in Seconds
- Connects with Copper, CPVC, PVC, and Pex
- Includes Two Pipe Reinforcers
- IAPMO Certified - NSF 61 & NSF 372
- Wetted Surfaces Contain Less than .25% Content

CERTIFICATIONS/APPROVALS

- IAPMO Certified
 - NSF 372
 - Uniform Plumbing Code (cUPC)
 - IAPMO/ANSI Z1157-2014
 - NSF/ANSI 14-2014
- Conforms to ASSE 1061

PRESSURE/TEMPERATURE RATING

Pressure Rating: Max. 200 PSI
 Temperature Range: Max. 200°F Water Service

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	End Connection	Lead Free Brass - C46500
3	Ball	Chrome Plated Lead Free Brass - C46500
4	Seat (2)	PTFE
5	Stem	Lead Free Brass - C37700
6	Packing	PTFE
7	Packing Gland	Brass - C37700
8	Handle	Steel
9	Handle Nut	304 Stainless Steel
10	Push Ring	POM
11	Lock Ring	Lead Free Brass - C37700
12	Gripper Ring	Steel
13	Seat Ring	POM
14	O-ring	EPDM

DIMENSIONS

Part No	Size	A	B	C	D	E
100-103JFPG	1/2"	2.95	1.69	3.64	0.59	0.91
100-104JFPG	3/4"	3.48	1.83	3.64	0.75	1.10
100-105JFPG	1"	4.14	2.42	4.17	0.98	1.32