

# THE BEST BALL VALVE ON THE MARKET




## T-100 SERIES

Superior quality, performance, and more certifications and ratings than any other valve platform.



(dependent on model)

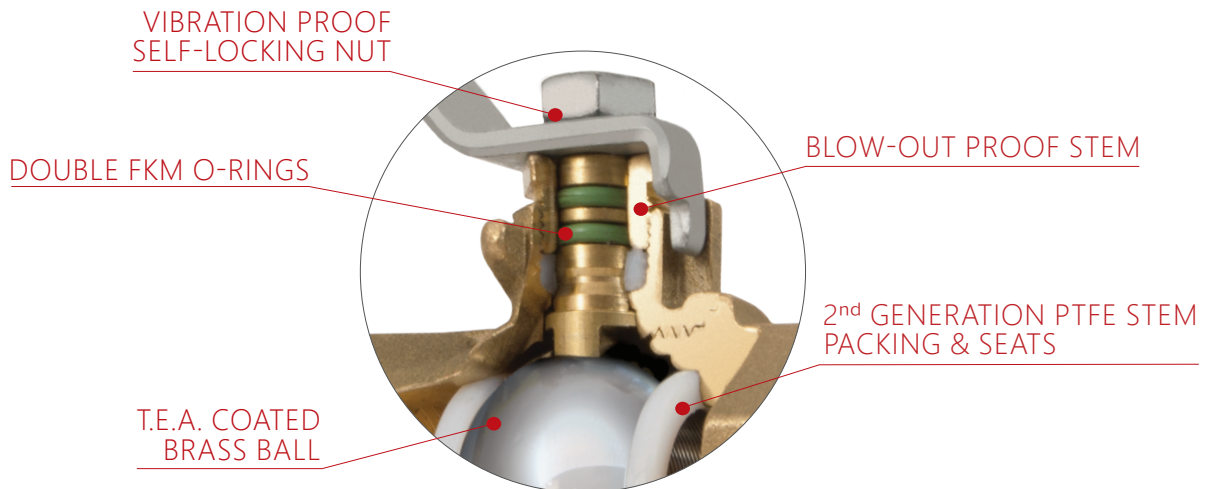

- ✓ 2-PIECE, FULL PORT, 600 WOG
- ✓ THREADED CONNECTIONS
- ✓ TRIPLE STEM SEAL LIFETIME WARRANTY
- ✓ 100% TESTED

- ✓ 100% MADE IN ITALY
  - ✓ LEAD FREE & DEZINCIFICATION RESISTANT\*
  - ✓ OPTIONAL STAINLESS STEEL TRIM \*
- \*on select T-100 models

# SURPASSES THE COMPETITION IN

QUALITY • CONSTRUCTION • PERFORMANCE • APPROVALS

		JOMAR	COMPETITORS						
		JOMAR T-100	70-100	FBV-3	T-585	8901	5044F	1001	58
APPROVALS	UL 125	X		X		X	X		
	UL 842	X				X	X	X	
	UL C	X				X			
	FM	X		X		X	X	X	X
	CSA	X		X		X	X	X	X
	DELTA C	X							
SPECS	STEM SEAL	TRIPLE	DOUBLE	DOUBLE	DOUBLE	DOUBLE	DOUBLE	DOUBLE	DOUBLE
	BALL	T.E.A.	CHROME	CHROME	CHROME	CHROME	CHROME	CHROME	CHROME
	SEATS	G300	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE	PTFE
	HANDLE & NUT	GEOMET	ZINC	CHROME	ZINC	ZINC	GEOMET (H) ZINC (N)	DACROMET	ZINC
TESTS	CYCLE TEST AVERAGE* (1/2" - 1")	12,011	1,054	5,907	2,174	3,575	4,776	-	-

\*Results are from IAPMO Research and Testing, Inc. to determine number of on-off cycles the valves could withstand at 600 PSI before leaking occurred at the stem.



## T-100NE

UL Listed (1/4" - 2")

- VQGU - Trim & drain
- MHKZ - Manual valves
- YQNZ - Compressed gas shut-off valves
- YRBX - Flammable liquid shut-off valves
- YRPV - Gas shut-off valves
- YSDT - LP gas shut-off valves
- SFJQ - Valves, refrigerant

CSA Certified


- ANSI Z21.15 (.5 PSIG) (1/4" - 3")
- ASME B16.33 (125 PSIG) (1/2" - 2")
- ASME B16.38 (125PSIG) (2-1/2" - 4")
- CSA 3.16 -15 (125 PSI) (1/4" - 4")
- CGA 9.2 (1/4" - 3")
- Delta C (3/8" - 3/4")

MSS SP-110

ANSI B1.20.1

FM Approval\*

(1/4" - 3/4" 600 WOG, 1" - 2" 500 WOG)



\*on select models

## T-100CG

NSF 372\*

NSF 61-8\*

NSF 61-Annex G\*

MSS SP-110

ANSI B1.20.1

LEARN MORE

JOMARVALVE.COM

