Stainless Steel Multi Cartridge Filter Housings



Multi-Cartridge Filter Housings work by evenly distributing unfiltered water around the filter cartridges. Suspended solids are captured in the filters and the filtered water exits through the outlet. PRM Stainless Steel Cartridge housings use industry standard 2.5 Inch x 40 Inch cartridge filters.

PRM Part #: BFCARTSSC28304X

Features:

- 304 Stainless Steel Housing
- 3 Inch Flanged Inlet/Outlet Connections
- 1/2 Inch NPT Drain Connections
- Filtration for Silt, Odor, Sediment, and More
- Easily Cleaned and Maintained
- Accepts standard length cartridges
- Air vent for use before start-up or draining
- Accepts complete range of filter media
- EPDM O-Rings
- Operating pressure: 145 psig max.
- Operating temperature: 40° 140°F

BFCARTSSC28304X: 7 Cartridge Housing

- Uses (7) 2.5" x 40" Filter Cartridges
- Inlet/Outlet: 3 Inch Flange
- Flow Rate: 168 GPM







REPLACEMENT FILTERS AVAILABLE

PRM 2.5" x 40" spun polypropylene sediment filters are kept in stock for quick delivery.

Available in a variety of micron ratings and sizes. PRM spun polypropylene sediment filters meet NSF standards.

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com

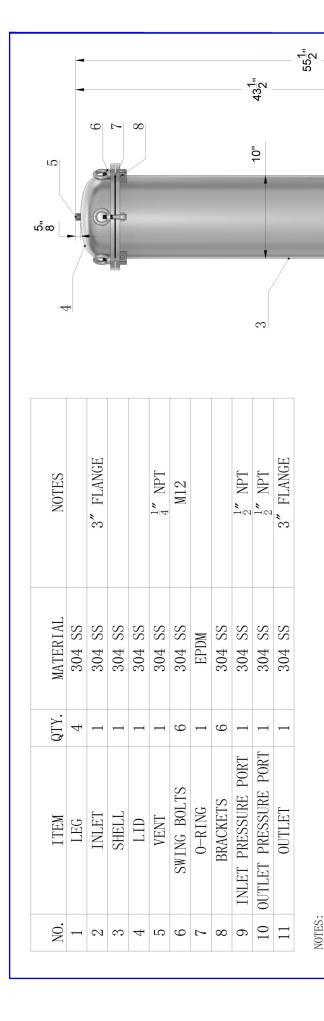

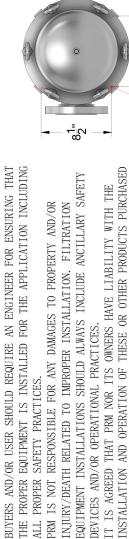

EQUIPMENT INSTALLATIONS SHOULD ALWAYS INCLUDE ANCILLARY SAFETY

DEVICES AND/OR OPERATIONAL PRACTICES.

PRM IS NOT RESPONSIBLE FOR ANY DAMAGES TO PROPERTY AND/OR INJURY/DEATH RELATED TO IMPROPER INSTALLATION. FILTRATION

ALL PROPER SAFETY PRACTICES.

<u>_</u> 8

34

<u>_</u>____

 \sim

 $\frac{2^{1}}{2^{1}}$

PRM FILTRATION IS ONLY A SUPPLIER OF THIS EQUIPMENT. PRM IS NOT RESPONSIBLE FOR SPECIFYING THIS PRODUCT FOR THE

APPLICATION.

3

. .

01

11

61



TYP 1 OF 4: \emptyset_2^1 " FOOT HOLE 304 SS 40" 7 CARTRIDGE HOUSING

BFCARTSSC28304X

7

10/03/2023

5<mark>1</mark>"



ALLOW UP TO 1" TOLERANCE ON ALL MEASUREMENTS.

FROM PRM.

5

MODEL LINK: https://a360.co/3PXq1Ad

6.