#2 High Pressure Dual Outlet NPT Bag Filter Housing



PRM provides stainless steel bag filter housings for high pressure (<150 psi) applications in remediation and industrial filtration projects.

Features:

- 304 Stainless Steel Construction
- Trade Size # 2 Housing (Uses #2 Filter Bags, 7-1/16" Dia x 32" L)
- 2 Inch NPT Inlet and Outlet Connections, Outlets on Both the Side and Bottom of the Housing for Flexibility in Directing Your Flow.
- 304 SS NPT End Plug Included to Close Off Flow from Outlet Not Being Used
- 100 GPM Flow Rate
- FKM (Viton) O-rings Standard
- 150 psi Maximum Working Pressure
- Stainless Steel Strainer Basket
- Adjustable Mounting Stand
- 1/4 Inch Top Port for Gauge or Relief Valve






PRM PART #: BFHBFH2DNPTX

** Options and Services **

- Skid mounting, pre plumbed filter array
- Steel, Stainless Steel, or PVC Piping w/Valves
- Custom Integration Into Existing Systems
- Field Installation, Startup and Maintenance
- Replacement Bag Filters available in stock

888-TREAT-IT • www.prmfiltration.com • sales@prmfiltration.com

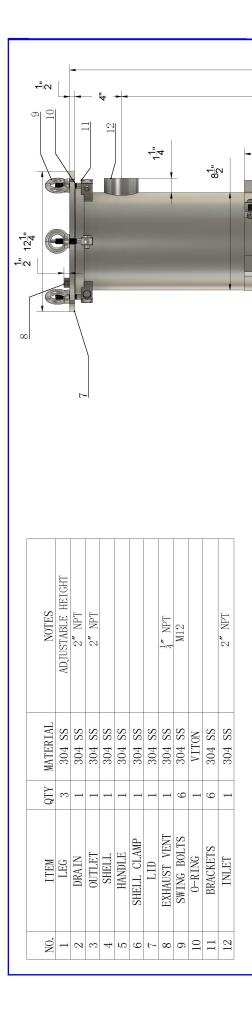

NOTES:


40<u>1"</u> $30\frac{1}{2}$

ပ

27"

 $\overline{Q}_{2}^{\frac{1}{4}}$

- BOUTPMENT.
 PRM IS NOT RESPONSIBLE FOR SPECIFYING THIS PRODUCT FOR THE APPLICATION.
 BUYERS AND/OR USER SHOULD REQUIRE AN ENGINEER FOR ENSURING THAT THE PROPER EQUIPMENT IS INSTALLED FOR THE APPLICATION INCLUDING ALL PROPER SAFETY PRACTICES.
 PRM IS NOT RESPONSIBLE FOR ANY DAMAGES TO PROPERTY.
 - AND/OR INJURY/DEATH RELATED TO IMPROPER INSTALLATION. FILTRATION EQUIPMENT INSTALLATIONS SHOULD ALWAYS INCLUDE ANCILLARY SAFETY DEVICES AND/OR OPERATIONAL PRACTICES.
- LIABILITY WITH THE INSTALLATION AND OPERATION OF THESE OR OTHER PRODUCTS PURCHASED FROM PRM. ALLOW UP TO $\frac{1}{4}''$ TOLERANCE ON ALL MEASUREMENTS. MODEL LINK: https://a360.co/3ShlKnl IT IS AGREED THAT PRM NOR ITS OWNERS HAVE j.
 - 6.



#2 SINGLE BAG HOUSING **BFHBFH2DNPTX**

03/14/2023

<u>-</u>4

7

PRINFII tration

Product Recovery Management Inc.
This information is proprietary and confidential.
No copies or reproductions allowed without the express written consent of PRM, Inc.