

Sediment Cartridge Filters


PRM spun polypropylene sediment filters are multi-layered gradient density filters in that the outer layers trap larger particles so that the inside layers are more efficient. Suitable for any potable water application, including high purity. The graded density construction captures particles throughout the entire cross section of the cartridge and reduces surface binding. Available in a variety of micron ratings and sizes. PRM spun polypropylene sediment filters meet NSF standards.

Features:

- Reduces sand, silt, scale, and rust particles in water and industrial fluid applications
- Nominal filtration rating 1, 5 or 25 micron
- Bonded polypropylene microfiber for resistance to chemicals and bacteria
- Temperature range of 40 to 140 degrees F
- Maximum Flow Rate: 2-28 gpm
- No glues, binders or additives that can cause side effects in water processing applications.



Cartridge Filter Pressure Drop Curve

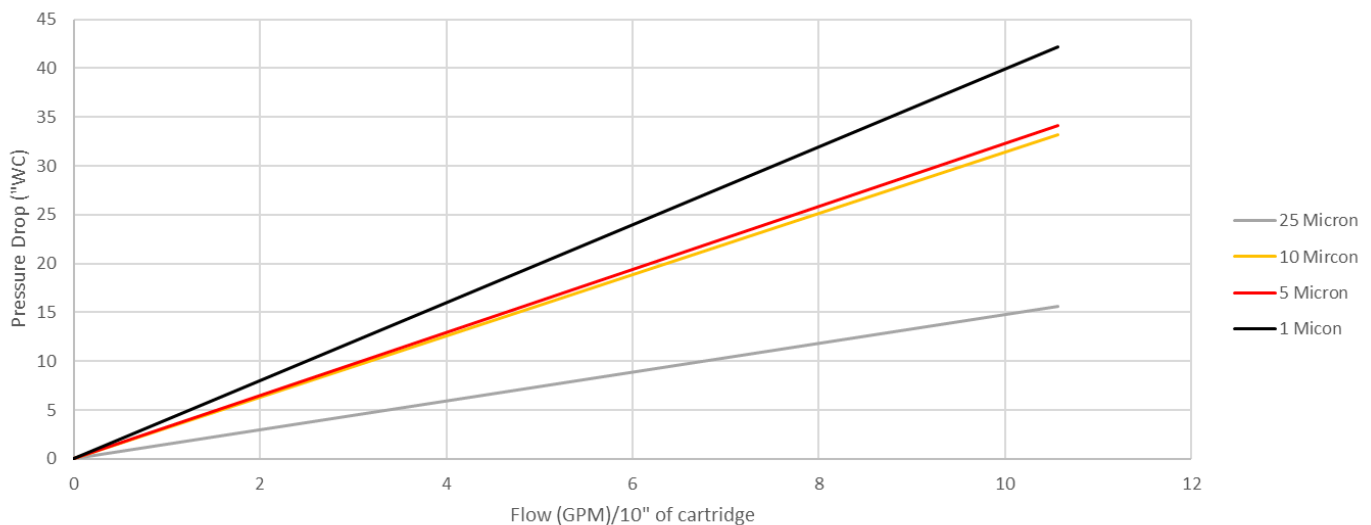

Sediment Cartridge Filters



PRM PART NUMBER	SIZE	MICRON	NSF CERTIFIED
BFCART450PA101NSFX	10" X 4.5"	1 MICRON	YES
BFCART450PA105NSFX	10" X 4.5"	5 MICRON	YES
BFCART450PA1010NSFX	10" X 4.5"	10 MICRON	YES
BFCART450PA1025NSFX	10" X 4.5"	25 MICRON	YES
BFCARTPA201NSFX	20" X 2.5"	1 MICRON	YES
BFCARTPA205NSFX	20" X 2.5"	5 MICRON	YES
BFCARTPA2010NSFX	20" X 2.5"	10 MICRON	YES
BFCARTPA2025NSFX	20" X 2.5"	25 MICRON	YES
BFCART450PA201NSFX	20" X 4.5"	1 MICRON	YES
BFCART450PA205NSFX	20" X 4.5"	5 MICRON	YES
BFCART450PA2010NSFX	20" X 4.5"	10 MICRON	YES
BFCART450PA2025NSFX	20" X 4.5"	25 MICRON	YES
BFCARTGBN730FILTER1M	30" X 2.5"	1 MICRON	NO

