

# Schedule 80 PVC Gate Valve




PVC gate valves are used to allow, block and regulate flow in a pipe line. The manually operated handle raises or lowers the "gate" inside the valve body.



## Specification of Materials:

- Body: PVC (Schedule 80)
- Cap: PVC
- Valve Gate:
  - 2 Inch: Polypropylene
  - 3 Inch: Stainless Steel
  - 4 Inch: Stainless Steel
  - 6 Inch: PVC
- Seat: NBR
- O-Ring: NBR
- Stem: Stainless Steel
- Cap: PVC
- Handle: ABS
- Max. Pressure: 42 PSI @ 73°F
- NBR (Buna-N) Seat/O-Ring
- Socket Connections
- Color: Dark Gray
- Manufacturer: Omen

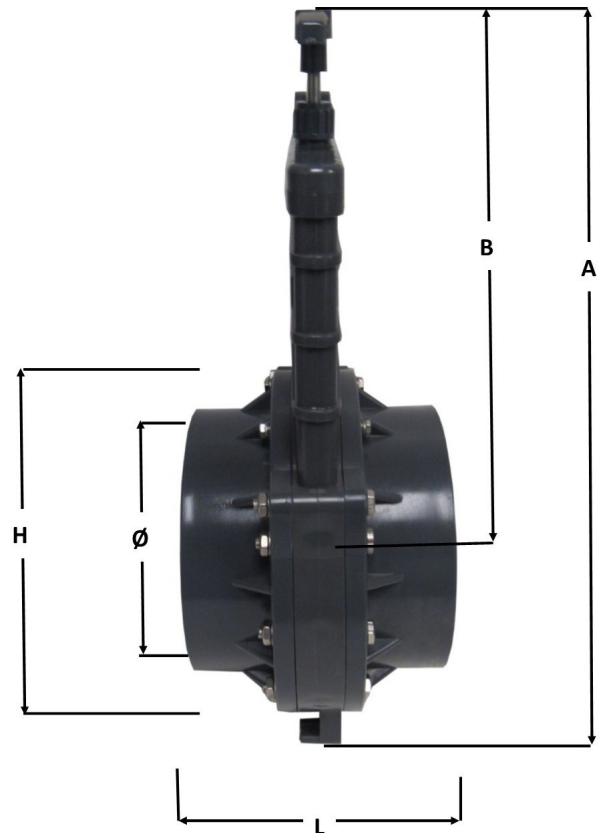

SCHEDULE 80 PVC GATE VALVE DIMENSIONS (INCHES)						
Part #	Nominal Size	Ø	A	B	H	L
PVC80GV0200MWGV0002X	2 INCH	2.48 (63 mm)	8.25	6.5	3.38	4.25
PVC80GV0300MWGV0004X	3 INCH	3.5(90 mm)	12.00	8.75	5.9	5.04
PVC80GV0400MWGV0006X	4 INCH	4.5 (110 mm)	14.00	10.25	7.0	5.2
PVC80GV0600MWGV0008X	6 INCH	6.625 (160 mm)	20.00	14.5	9.52	6.77

888-TREAT-IT • [www.prmfiltration.com](http://www.prmfiltration.com) • [sales@prmfiltration.com](mailto:sales@prmfiltration.com)