

Stainless Steel Spring Check Valves

Check Valves are automatic shut-off valves that are commonly used for preventing back-flow or drainage in a piping system.


Inline spring check valves use a spring-actuated design that allows fast seating action.

Features:

- Female NPT Connections
- PTFE Gasket
Temperature range: -4° to 350° F
- 304 Stainless Steel body and spring for corrosion resistance and durability
- Suitable for use with water, oil, and gas
- Cracking Pressure: 2 psi
- Max. Pressure: 1000 psi

Size	Part Number
1/2 Inch	SSCV050SPRINGX
3/4 Inch	SSCV075SPRINGX
1 Inch	SSCV100SPRINGX
1-1/4 Inch	SSCV125SPRINGX
1-1/2 Inch	SSCV150SPRINGX
2 Inch	SSCV200SPRINGX



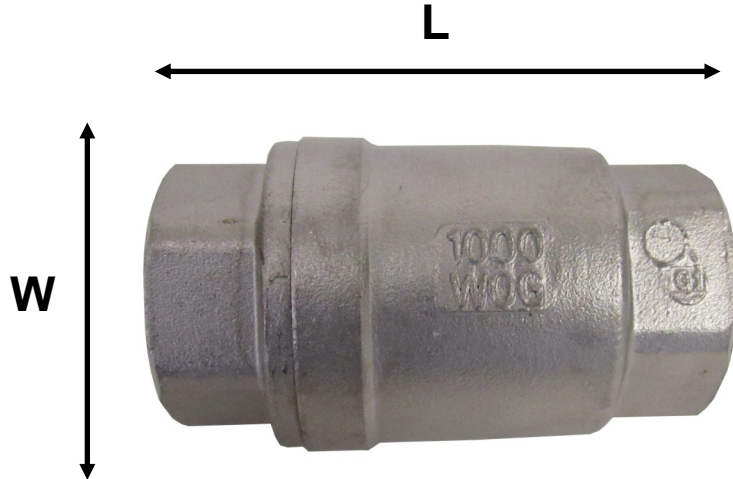

NPT Size	Part Number	Length	Width	Weight
1/2 Inch	SSCV050SPRINGX	2.4 inches	1.5 inches	8 Oz.
3/4 Inch	SSCV075SPRINGX	2.7 inches	1.6 inches	10 Oz.
1 Inch	SSCV100SPRINGX	3.25 inches	1.9 inches	1 lb.
1-1/4 Inch	SSCV125SPRINGX	3.6 Inches	2.3 Inches	2 lbs.
1-1/2 Inch	SSCV150SPRINGX	4.2 inches	2.75 inches	2 lbs.
2 Inch	SSCV200SPRINGX	4.75 inches	3.25 inches	3 lbs.

888-TREAT-IT • www.prmfiltration.com • sales@prmfiltration.com