

## Sight Flow Indicators


Sight flow indicators make monitoring fluids inside a pipe easy and efficient. The device is installed into a pipe and offers a visual reference for liquid flow and direction. Operators can also see the clarity and color of fluids via the window.

### Specifications:

Maximum Pressure: 232 psig (16 bar)

Maximum Temperature: 392°F

Use with Water, Oil, Liquids

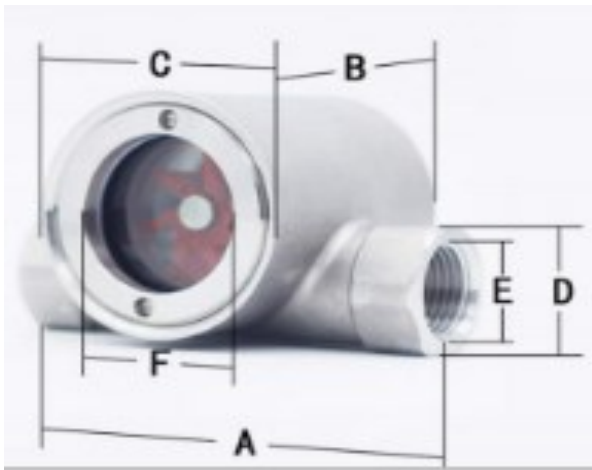

### Materials:

Body: 304 Stainless Steel, Tempered Glass

Seal: PTFE (White)

Impeller: PTFE (Red)

PART NUMBER	SIZE (NPT)	A	B	C	D	F
FMSGISSPTFETR025X	1/4 INCH	3.6"	2.4"	1"	1"	1.3"
FMSGISSPTFETR050X	1/2 INCH	3.6"	2.4"	1"	1"	1.3"
FMSGISSPTFETR075X	3/4 INCH	3.6"	2.4"	1.25"	1.25"	1.3"
FMSGISSPTFETR100X	1 INCH	4.3"	2.6"	1.5"	1.5"	1.5"
FMSGISSPTFETR125X	1-1/4 INCH	4.5"	2.6"	1.9"	1.9"	1.4"
FMSGISSPTFETR200X	2 INCH	5.3"	2.9"	2.2"	2.2"	1.8"

\*Measurement in Inches

888-TREAT-IT • [www.prmfiltration.com](http://www.prmfiltration.com) • [sales@prmfiltration.com](mailto:sales@prmfiltration.com)