

RT-2872 Electric Catalytic Oxidizer

250E Flameless Electric Catalytic Oxidizer, 300 CFM Rental Skid, 230V 3 PH

PRM Rental 300 Electric Catalytic Oxidizers are rated to treat off gas emissions that contain VOC's by heating the air stream to approx. 400-550°F prior to passing through a catalyst that further destroys the contaminants.

Heating element is controlled by a solid state SCR. A temperature controller taking readings from probes in the system controls the SCR. PLC controls system logic and time delay functions.

Base oxidizer is equipped with a 6"W x 12"H x 4"D Catalyst module that provides 98% destruction efficiency.

Features:


- Marathon Blower Motor—3HP
- 230 VAC/ 3 PH / 7.4 Amps
- High Efficiency SS Heat Exchanger
- NEMA 4 controls enclosure with deadfront
- System Tested Prior to Shipment
- Oxidizer is rated for vapor remediation and must operate within 25% of the LEL



**Short or Long Term Lease Options or
Purchase Available!**

Contact PRM for Details

RT-2872 300 CFM Electric Catalytic Oxidizer

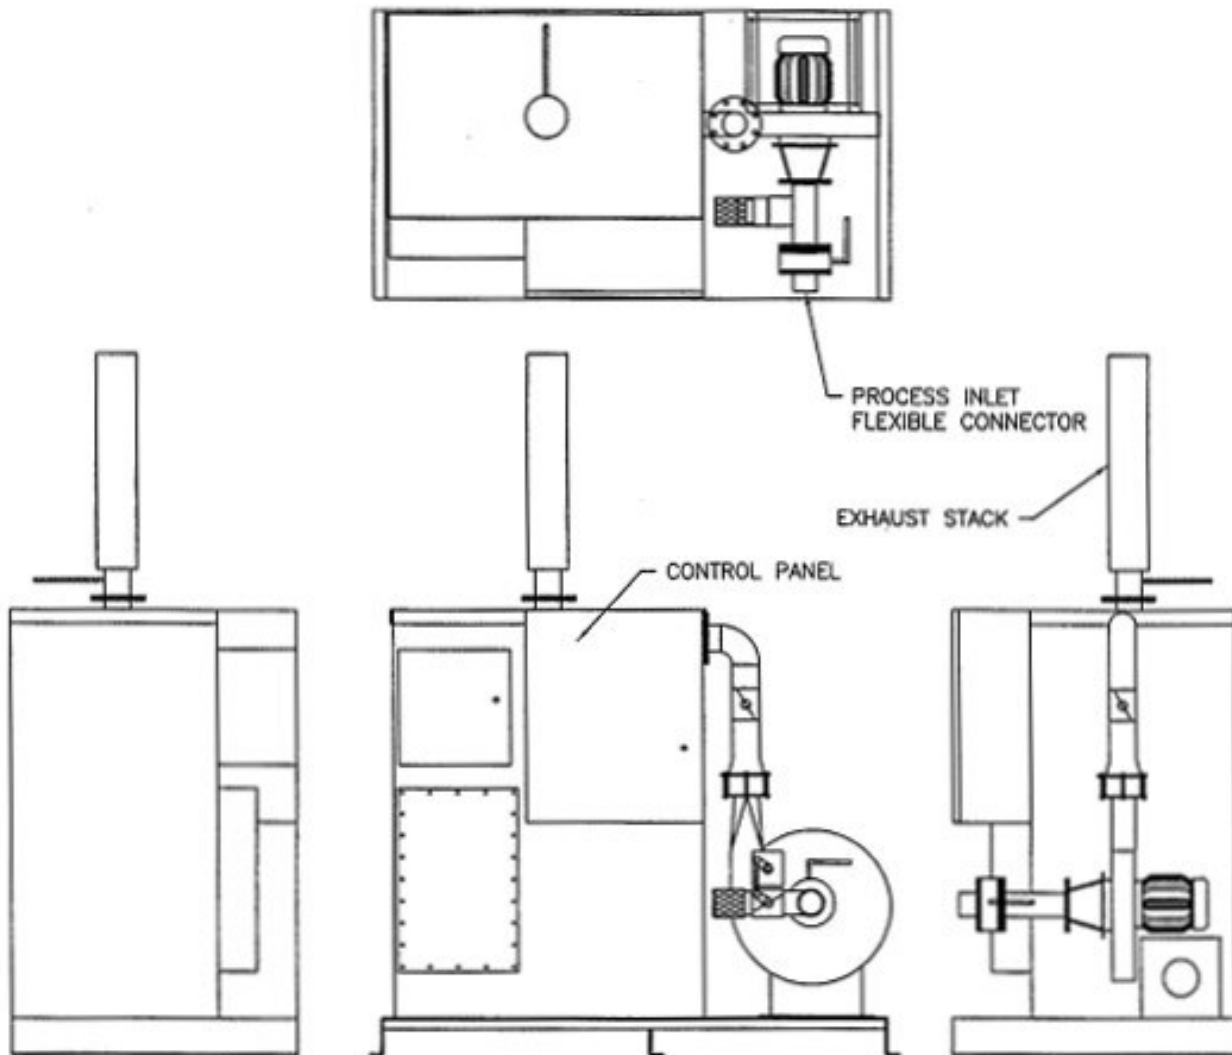

ESTIMATED WEIGHT: 2700 LBS