

RT-3337 MPX Rental System

Multi-Phase Extraction/Air Sparge System, 600 CFM, 8 x 20 Connex Container

Features:

- Rated for 600 CFM @ 15" Hg
- 8' x 20' shipping container with separate rooms for Class 1, Div. 2 locations
- 15 Leg Sparge Manifold
- VFD for motors
- HMI allows for total control and feedback

Equipment:


- 25 HP Eurus ZG125 DPE Blowers rated @300cfm each up to 15" Hg
- 25 HP, 230V, 3 phase TEFC Motors
- MS-200 Moisture Separator with High Vacuum Pump Out, single 6" inlet
- Busch Mink MM 1202 AP 20 HP Rotary Claw Air Sparge Blower with heat exchanger
- NEMA 3R Industrial Control Panel
- System PLC/HMI/SCADA with integrated Telemetry Module



**Short or Long Term Lease Options or
Purchase Available!**


Contact PRM for Details

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com

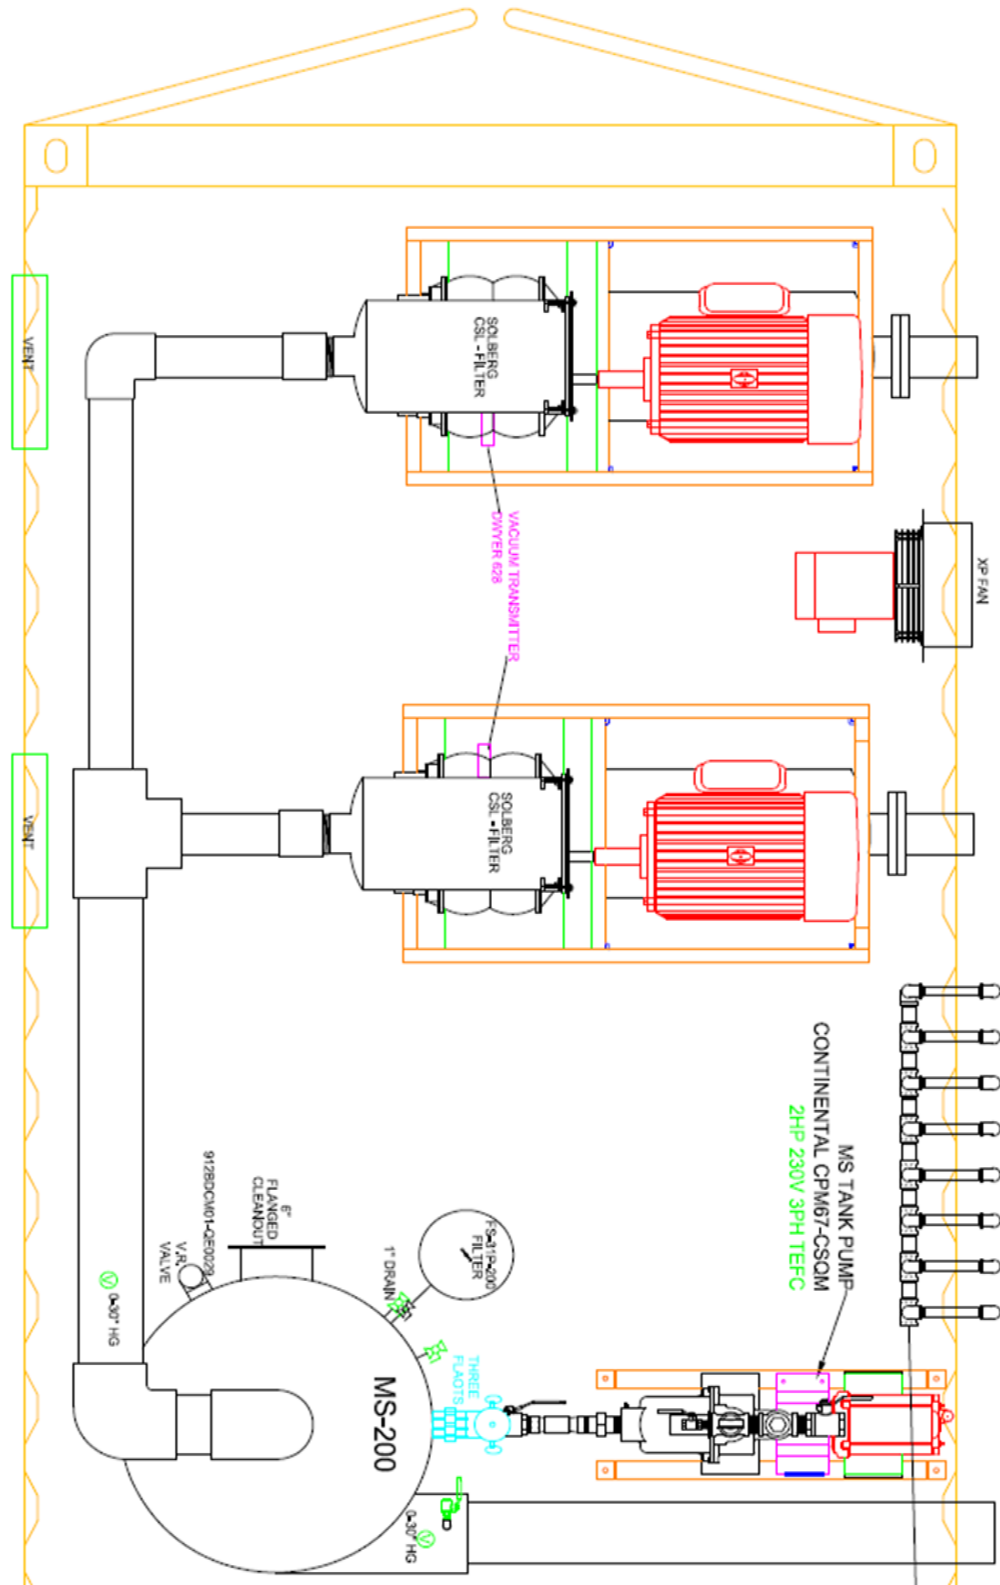

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com


RT-3337 MPX Rental System

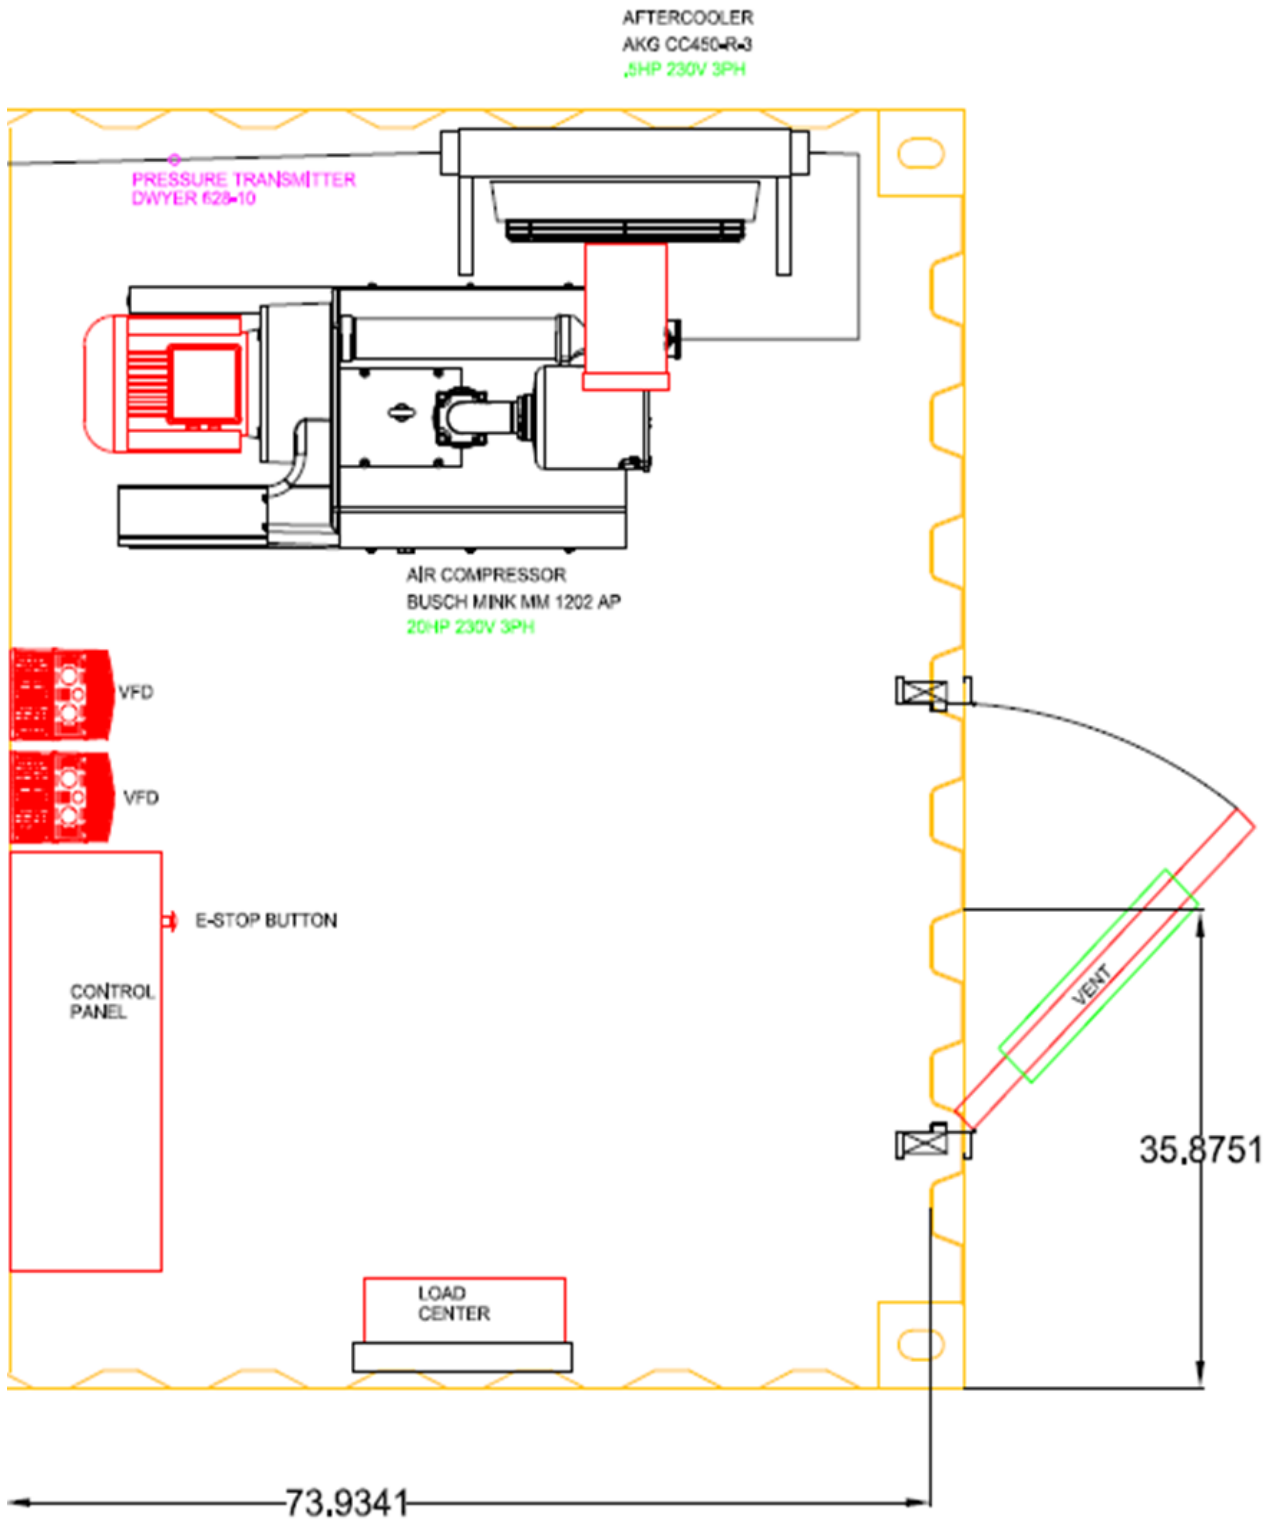

ZG-125



VACUUM PERFORMANCE
14.7 PSIA and 68 ° F

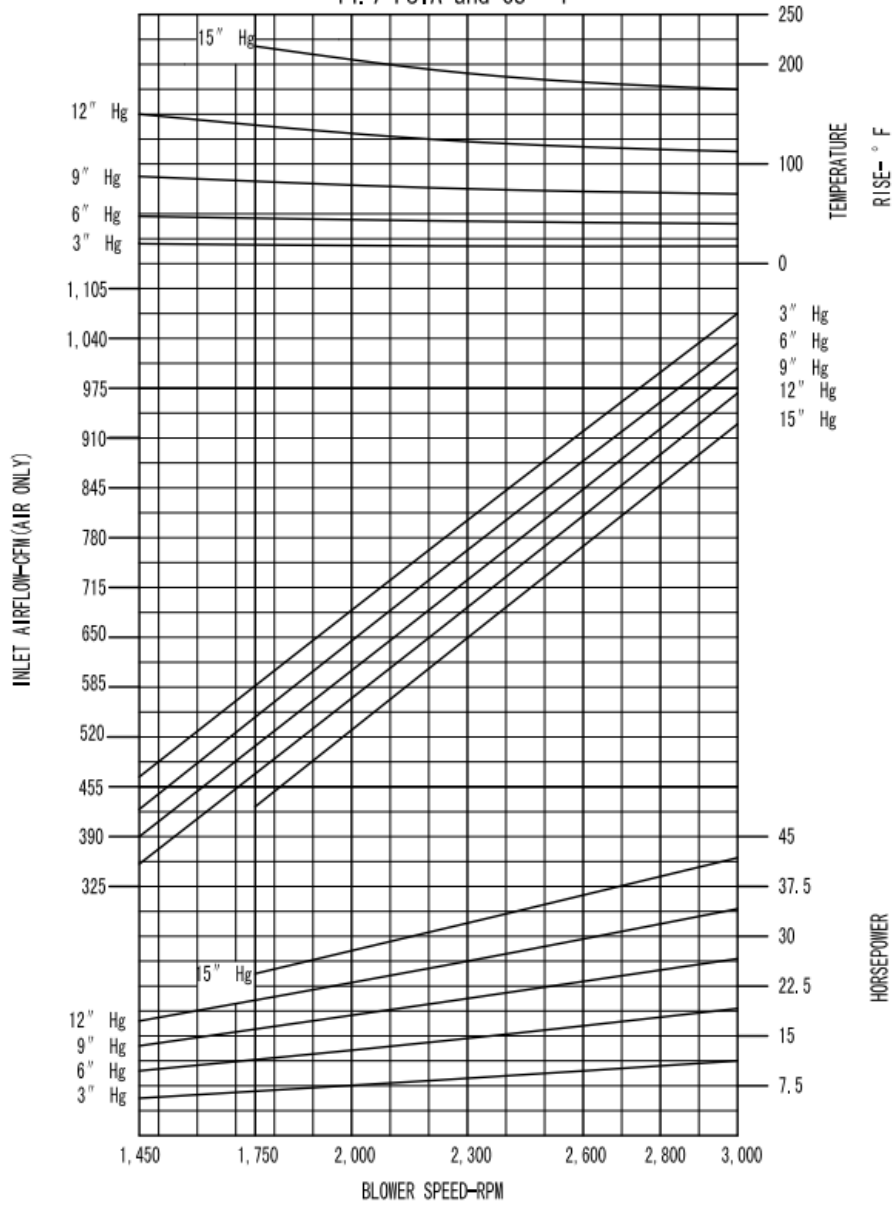

**Blower Curve,
RT-3337**


DOC. NO: ZGTPC-002.05

Version: 1.0

May 2009

Page: 1 of 1

Pumping Speed vs. Discharge Pressure

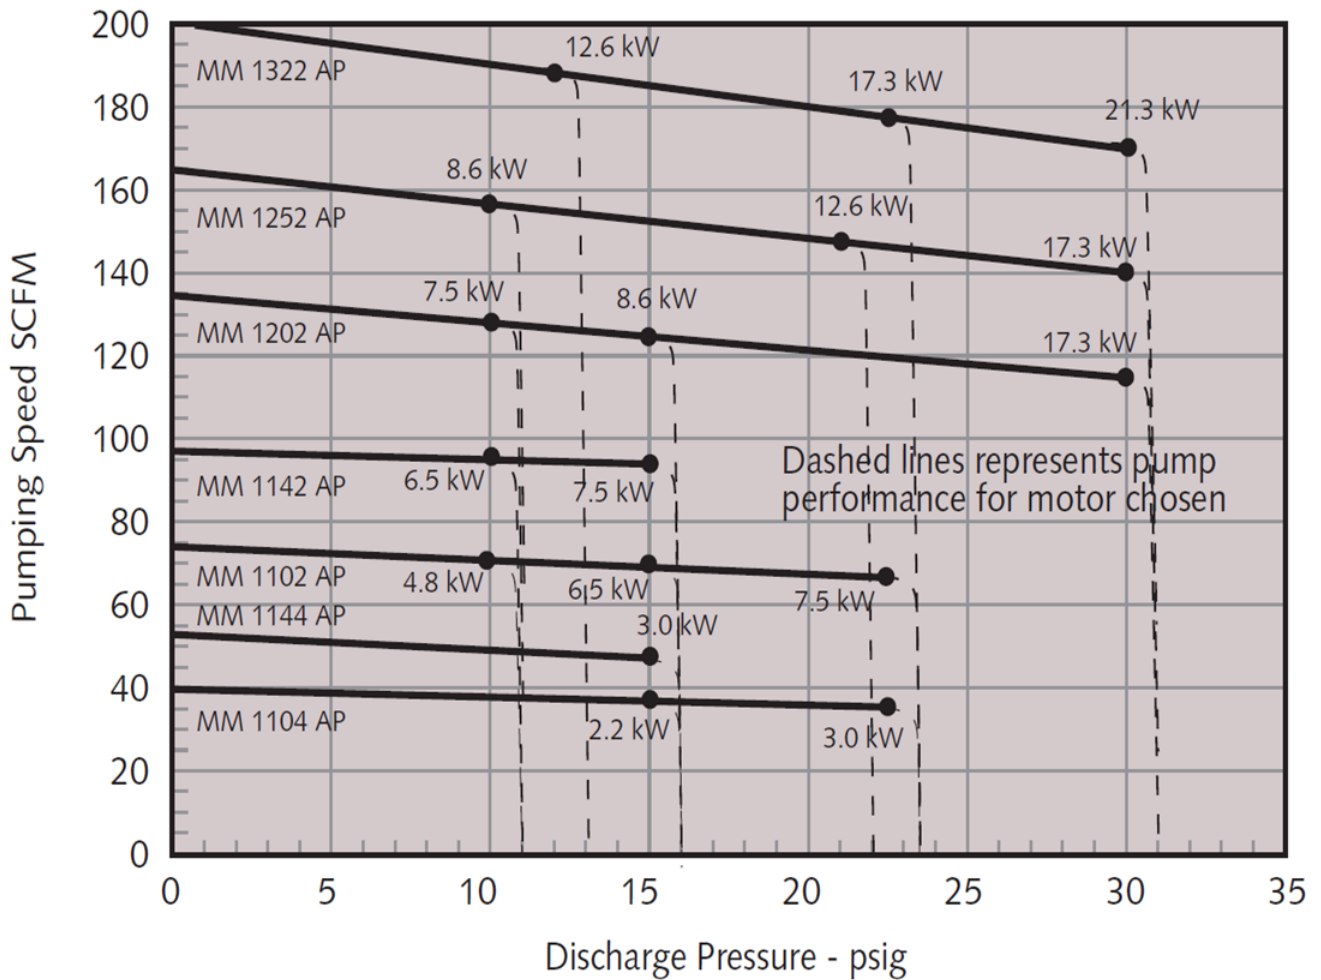

**Compressor Curve,
RT-3337**