


Lead Free Brass Inline Check Valve

Threaded Connection, 300 WOG, 150 Class

T-521G

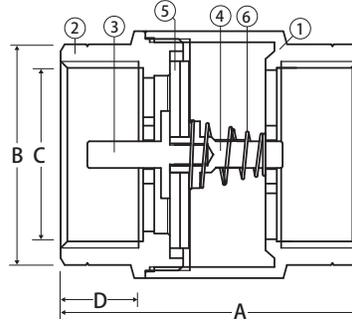

FEATURES

- Dezincification Resistant Brass Alloy
- Forged Lead Free Brass Body
- Can be Installed in Vertical or Horizontal Positions
- Bubble-Tight Teflon Seal
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

- NSF/ANSI/CAN 61
- NSF/ANSI/CAN 372
- ANSI B1.20.1

PRESSURE/TEMPERATURE RATING

- 300 WOG
- Max 250°F

Install 5 pipe diameters minimum downstream from pump discharge or changes in direction to avoid flow turbulence. Flow straighteners may be required in extreme cases.

Note: On pump discharge, the preferred check valves are: Inline, Spring Assisted, Center-Guided, Lift Checks.

Warning: Do Not Use For Reciprocating Air Compressor Service

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass
2	Tailpiece	Lead Free Brass
3	Disc Holder 1	Lead Free Brass
4	Disc Holder 2	Lead Free Brass
5	Disc	PTFE
6	Spring	304 Stainless Steel

DIMENSIONS

Part No	Size	A	B	C	D
105-603G	1/2"	1.91	1.02	0.72	0.49
105-604G	3/4"	2.05	1.19	0.92	0.59
105-605G	1"	2.31	1.49	1.15	0.59
105-606G	1-1/4"	2.66	1.84	1.50	0.73
105-607G	1-1/2"	2.74	2.04	1.74	0.71
105-608G	2"	3.31	2.61	2.21	0.83