# **Stainless Steel Ball Valve**



# 3 Piece 4 Bolt • Swing Out Body • Full Port • Threaded Connection

• Stainless Steel Trim • 1000 WOG



T-SS-1000N-4B


#### **Features**


- Latch Lock Handle May be Locked in Open or Closed Position
- 100% Leak Tested
- 29 in-Hg Vacuum Rating
- Wetted Surfaces Contain Less than .25% Lead Content
- Repair Kits Available

## Approvals LISTED (ALAD FREE

- UL Listed (1/4" 2")
  - MHKZ Manual Valves
  - YQNZ Compressed Gas Shut-Off Valves
  - YRBX Flammable Liquid Shut-Off Valves
  - YRPV Gas Shut-Off Valves
  - YSDT LP Gas Shut-Off Valves
  - YQAR Anhydrous Ammonia Shut-Off Valves
- MSS SP-110
- NACE Certified
- ANSI B1.20.1
- ANSI B16.11
- · Conforms to API 598
- Buy American Act Compliant

### Valve Seat Rating 1000 WOG - 150 WSP

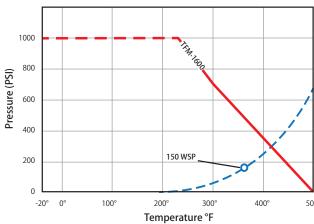

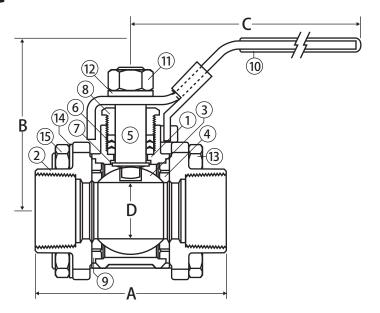

### **Material Specifications**

No.	Part	Materials					
1	Body	CF8M Stainless Steel					
2	End Cap (2)	CF8M Stainless Steel					
3	Ball	CF8M Stainless Steel					
4	Seat (2)*	Hostaflon® TFM 1600					
5	Stem	316 Stainless Steel					
6	Packing (2)*	RPTFE					
7	Stem Seal*	Hostaflon® TFM 1600					
8	Packing Gland	316 Stainless Steel					
9	Body Seal (2)*	Hostaflon® TFM 1600					
10	Handle	304 Stainless Steel					
11	Handle Nut	304 Stainless Steel					
12	Lock Washer	304 Stainless Steel					
13	Body Bolt (4)	304 Stainless Steel					
14	Body Lock Washer (4)	304 Stainless Steel					
15	Body Nut (4)	304 Stainless Steel					
*Included in repair kit							

### **Dimensions**

Size	Α	В	С	D	Torque
1/4"	2.37	2.18	4.30	0.37	60
3/8"	2.37	2.18	4.30	0.37	60
1/2"	2.76	2.38	4.30	0.56	80
3/4"	3.03	2.87	5.81	0.81	150
1"	3.63	2.95	5.81	1.00	250
1-1/4"	4.14	3.66	7.44	1.25	320
1-1/2"	4.73	3.94	7.44	1.50	400
2"	5.43	4.25	7.81	1.97	480
3"	7.52	5.26	9.75	3.00	600
4"	8.54	6.57	11.88	3.93	850
	1/4" 3/8" 1/2" 3/4" 1" 1-1/4" 1-1/2" 2" 3"	1/4" 2.37 3/8" 2.37 1/2" 2.76 3/4" 3.03 1" 3.63 1-1/4" 4.14 1-1/2" 4.73 2" 5.43 3" 7.52	1/4"       2.37       2.18         3/8"       2.37       2.18         1/2"       2.76       2.38         3/4"       3.03       2.87         1"       3.63       2.95         1-1/4"       4.14       3.66         1-1/2"       4.73       3.94         2"       5.43       4.25         3"       7.52       5.26	1/4"         2.37         2.18         4.30           3/8"         2.37         2.18         4.30           1/2"         2.76         2.38         4.30           3/4"         3.03         2.87         5.81           1"         3.63         2.95         5.81           1-1/4"         4.14         3.66         7.44           1-1/2"         4.73         3.94         7.44           2"         5.43         4.25         7.81           3"         7.52         5.26         9.75	1/4"         2.37         2.18         4.30         0.37           3/8"         2.37         2.18         4.30         0.37           1/2"         2.76         2.38         4.30         0.56           3/4"         3.03         2.87         5.81         0.81           1"         3.63         2.95         5.81         1.00           1-1/4"         4.14         3.66         7.44         1.25           1-1/2"         4.73         3.94         7.44         1.50           2"         5.43         4.25         7.81         1.97           3"         7.52         5.26         9.75         3.00

\*500-311 is a 6 bolt pattern



**WARNING:** This product can expose you to chemicals including diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and diisononyl phthalate (DINP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.