




Attached to a building using exposed fasteners, the PBC panel is a popular panel for roof and wall applications in the residential and light commercial markets. This panel is often installed horizontally on walls in commercial applications to provide a contemporary aesthetic.

Product Specifications

- Applications: Roof and Wall
- Coverage Widths: 32"
- Rib Spacing: 2.67" on center
- Rib Height: 7/8"
- Minimum Slope: 3:12
- Panel Attachment: Exposed Fastening System
- Gauges: 26 (Standard); 29, 24, 22 (Optional)
- Finishes: Smooth (standard); Embossed (optional)
- Coatings: Galvalume Plus®, Signature® 200

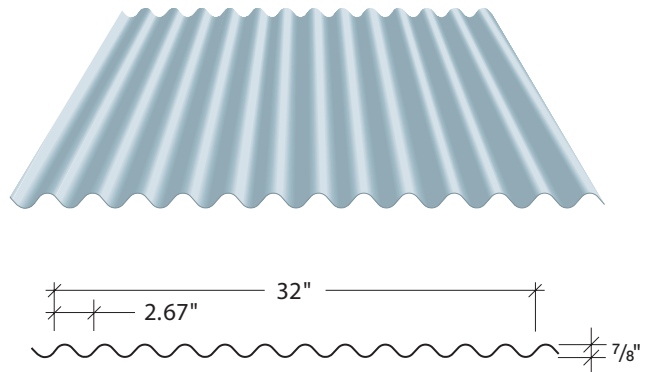

Features and Benefits

UL 790 external fire rating is available.

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
FIRE RESISTANCE	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section

For a complete line of trim and accessories, as well as available colors, please visit our website at ABCMetalRoofing.com.

800.877.8709 | abcmetalroofing.com | shop.abcmetalroofing.com

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, American Building Components reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, including complete a list of trim, accessories and available colors, please inquire or visit our website at www.abcmetalroofing.com.

