

300W LED

BALLOON LIGHT TOWER

42,000 LM
40,000 ft²



VT-300-G 2



RF REMOTE DOZENS OF SETTINGS



360 DEGREE GLARE FREE DIFFUSED LIGHT



POWER MULTIPLE UNITS BATTERY PACK



CRANK HANDLE TRIPOD FOR EASY OPERATION



FOOT PAD TENT STAKE OPENING



9FT/2-STAGE CHAIN DRIVEN ADJUSTABLE MAST



SLIDE & LOCK ADJUSTABLE LEG



ACCESSORIES

REMOTE



SAFETY CABLE



SPECIFICATIONS

Fixture Design	4-Modular panels + 1 Uplight
Total Wattage (W)	300W
Voltage (V)	AC 110-240V
Frequency (Hz)	50/60 Hz
Operating Amps (A)	2.5A
Spec LED Wattage (W)	PHILIPS Lumileds 280W
Luminous Flux (Lumen)	42,000 Lumens
Color Temperature (Kelvin)	5,700K
Color Rendering Index (CRI)	>70
Lamp Life (Hrs)	50,000 Hrs

DIMENSION & WEIGHT

Diffuser Inflated (L"x W"x H")	27.5 x 27.5 x 14.2 (70x70x36 cm)
Fixture Weight	25 lbs (11 kg)
Fixture (L"x W"x H")	11.2 x 11.2 x 16.3 (28 x 28 x 41.4 cm)
Power Cable	25' ft (760 cm) <small>SJOW 3*14 AWG CORE G US Std Plug</small>
Tripod Dimensions (Collapsed)	53 in. (135 cm)
Tripod Dimensions (Extended)	108 in. (274 cm)
Tripod Weight	16 lbs (7.3 kg)
Tripod Footprint (L"xW"xH")	45 x 45 x 108 (114 x 114 x 274 cm)
Ingress Protection	IP65
Safety Certifications	ETL, CE, FCC, RoHs

EFFORTLESS LIGHTING SETUP

VOLTERREX
Powered by ISM Lighting



-  ALUMINUM CONSTRUCTION WITH POWDER COATED PANELS FOR ALL ELEMENTS
-  4-SIDED MODULAR PANELS WITH WATERPROOF LENSES
-  INTEGRATED STAINLESS STEEL CAGE FOR PROTECTION
-  SUPERIOR IP65 WATER & DUST PROTECTION FOR COMMERCIAL INDUSTRIAL ENVIRONMENTS
-  VELCRO BAND FOR BALLOON DIFFUSER REMOVAL, CLEANING & REPLACEMENT



ACCESSORIES



TRIPOD CARRY BAG



LIGHT CARRY BAG



WHITE
BLD-300-G2




DARKSKY
BLD-300-G2
NOT INCLUDED



SAFETY
BLD-300-G2
NOT INCLUDED

300W LIGHT KIT POLAR LIGHTING DIAGRAM

Ground Coverage of Illumination:
Footcandles/Lux (fc/lx) vs. Distance (ft)

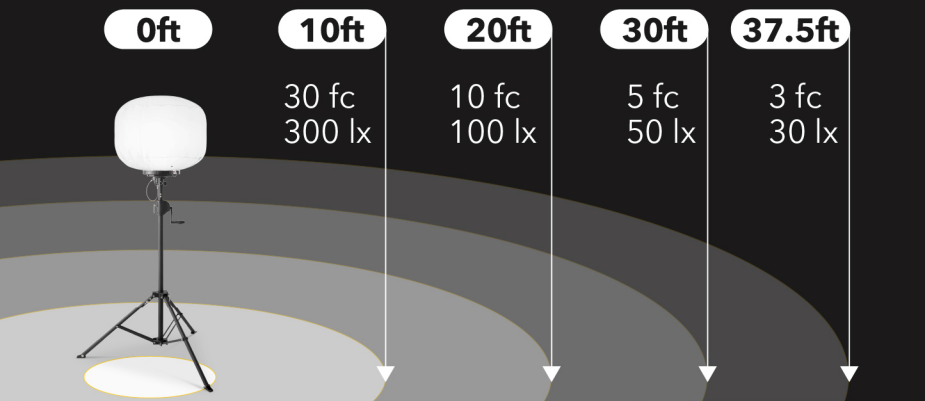

CONTACT Volterrex powered by ISM Lighting

☎ 866-765-VOLT 🌐 www.volterrex.com ✉ info@ismlighting.com

📍 300 Wampanoag Trail, Riverside, RI 02915

