






## DESCRIPTION

Diffuser can be used for both air intake and exhaust.  
 Recommended for ceiling and drop ceiling applications.  
 360 degree diffusion pattern.  
 Made of steel with polymeric coating.  
 Will not rust.  
 The baffle can be rotated to obtain the required air consumption listed in the specifications.  
 Supplied with mounting collar (model VRF).

## DIMENSIONS

Model	Measurements [in.]				
	Ø D	Air pass, Sq.Ft	Ø D1	H	H1
AM 100 VR	5 1/16"	0.043	3 7/8"	1 3/4"	2 1/16"
AM 125 VR	6"	0.075	5 1/16"	1 3/4"	2 1/16"
AM 150 VR	7 1/4"	0.107	5 13/16"	1 3/4"	2 1/16"
AM 200 VR	9 1/4"	0.215	7 13/16"	1 3/4"	2 1/16"

Model	Measurements [in.]				
	Ø D	Air pass, Sq.Ft	Ø D1	Ø D2	Ø D3
AM 100 VRF	3 7/8"	0.043	4 13/16"	2 15/16"	5 1/16"
AM 125 VRF	4 7/8"	0.075	6"	3 15/16"	6 1/16"
AM 150 VRF	5 7/8"	0.107	6 13/16"	5 1/16"	7 1/4"
AM 200 VRF	7 13/16"	0.215	8 7/8"	7"	9 1/4"

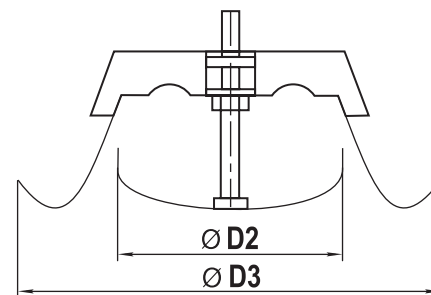

Tel: 888-640-0925      sales@vents-us.com  
 513-583-5786      www.vents-us.com  
 400 Murray Road,  
 Cincinnati, Ohio 45217





# AM-VR/AM-VRF

**PRODUCT  
SPECIFICATIONS**

**TECHNICAL  
DATA**

**DIFFUSERS**

MODEL	QUANTITY	COMMENTS	PROJECT
			location:
			architect:
			engineer:
			contractor:
			submitted by:

Tel: 888-640-0925    sales@vents-us.com  
513-583-5786    www.vents-us.com  
400 Murray Road,  
Cincinnati, Ohio 45217

