



SCOTTY MOUNT

#15-150P

This mounting kit has been designed for use with your Dickinson BBQ. It fits the following products:


- Sea-B-Que Small
- Sea-B-Que Round
- Sea-B-Que Large
- Spitfire 180 Grill

While this BBQ mount is a very strong and durable mount, it is not recommended to leave the Grill attached to the mount whilst underway, especially in a rough seaway. Some Scotty sockets in some installations may not be positioned to handle the weight of our larger grills. If this is the case, reposition your Scott Socket accordingly.

This mount kit is designed for use with “Scotty” Brand fishing rod holder sockets (#241 combi deck or side mount, #244 Flush Deck Mount or #344 Round Flush Deck Mount). For more information on Scotty products, visit www.scotty.com.


Included Parts

A – 1/4-20 x 5/8ths bolts	x 4
B – 1/4-20 Nuts	x 4
C – 1/4-20 Lockwashers	x 4

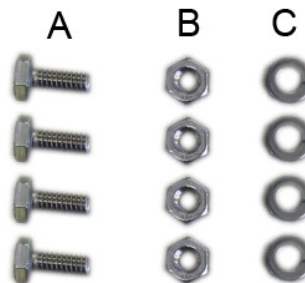

Attaching the H Bracket:

Remove the 10-32 nuts on the studs on the bottom of the drip tray holder then place the “H” bracket onto the studs in the position indicated below and then tighten the nuts onto the studs with a 3/8ths socket.

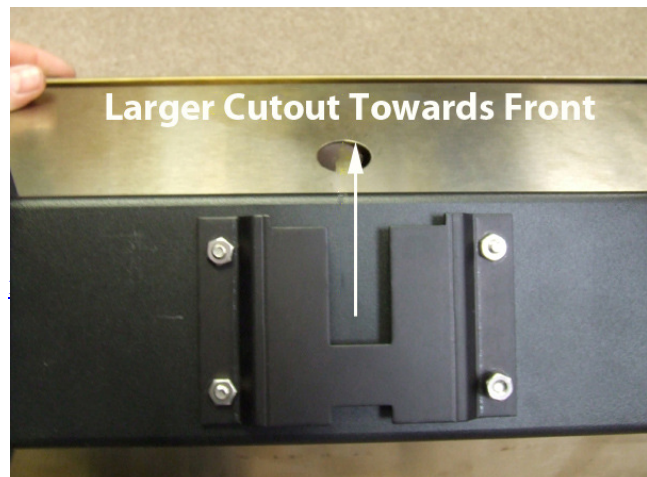

Assembling the Mount

1. Place the small mount bracket under the BBQ bracket and secure by placing the 1/4-20 x 5/8ths bolts through the bracket and into the curved obrounds.
2. Place the 1/4-20 lock washers and 1/4-20 nuts over top and tighten once desired orientation is found.



4. Slide the 2 mount brackets into each other
5. Place the 1/4-20 x 5/8ths bolts through the holes
6. Place the 1/4-20 lock washers and 1/4-20 nuts over top of the bolts and tighten



Positioning the Mount:

With the mounting post inserted in the Scotty brand socket, pivot the universal joint so the latch plate assembly is level.

- 1) Inset the mounting post in the Scotty brand socket.
- 2) Pivot the universal joint until the top latch plate is horizontal and tighten the 2 side acorn nuts
- 3) Rotate the latch bracket on top of the universal joint until the latch faces outboard, and tighten 2 top acorn nuts

**Scotty #241
Side/Deck Mount**



**Scotty #244
Flush Mount**



Tips for Using the Mount:

Before mounting the BBQ, release the stainless steel clasp so it is hanging loose. When the H bracket is on the BBQ and the mount is in the holder, hold the BBQ securely and slide the BBQ on to the mount. The “tongue” of the L shaped bracket will slide into the space between the H bracket and the BBQ base tray. Once the grill is firmly slid on to the tongue of the mount, tighten the latch/clasp so that the leading hook of the clasp grips the H bracket on the BBQ.

This clasp will be stiff when new but you will be able to attach and remove your BBQ as often as you want with your new mount kit. The clasp will become easier to open and close with use but will always firmly hold your Dickinson BBQ in place.

CAUTION

LATCH CAN BE EASILY DAMAGED ON FIRST USE

When you are first installing your new Dickinson BBQ mount, DO NOT hook the end of the latch onto the end of the mount bracket. This can cause damage to the latch and invalidate your warranty.

