



## Replacing an Orifice in a Sea-B-Que

1. Remove the grills from the BBQ
2. Undo the screw holding the burner in and slide the burner out of the BBQ

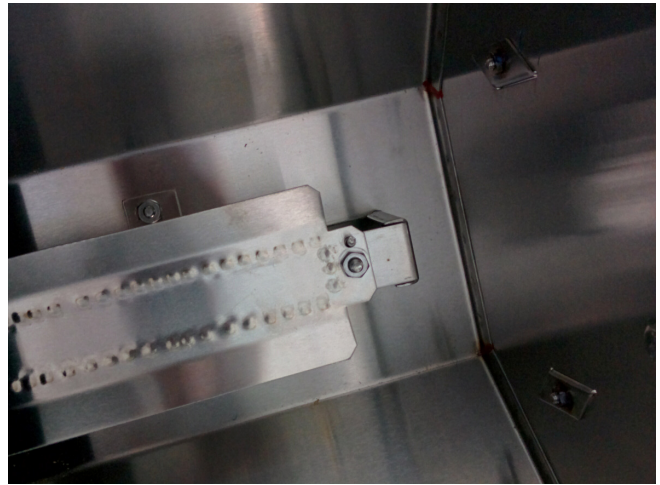

3. Locate the three screws that hold on the regulator box and undo to expose the orifice
4. Using a 1/2" wrench on the orifice nut and a 7/16" wrench in the outer coupling, remove the old orifice

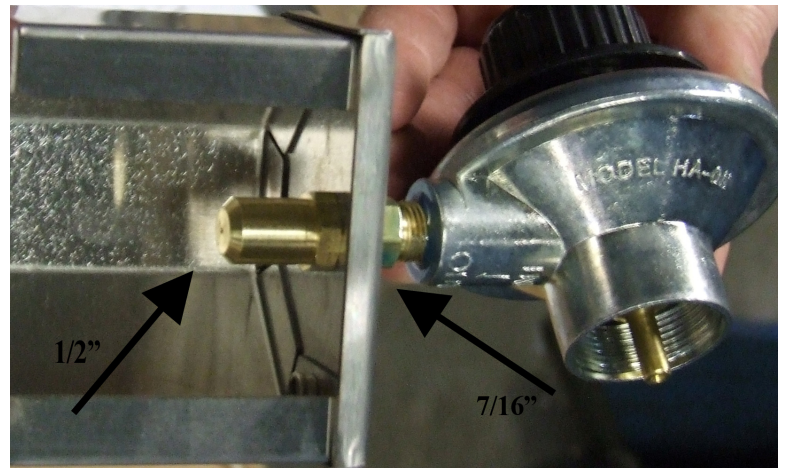

5. Using threadlocker on the threads, screw the new orifice back onto the fitting and tighten. Re-assemble BBQ