


# 1956 CHEVY CLUTCH PEDAL LINKAGE ADJUSTMENT INSTRUCTIONS & PARTS DIAGRAM (#650-4633) & (#650-4641)



1. Locate the clutch pedal by adjusting the clutch pedal lever bumper bracket C until pedal is at the same height as the brake pedal.
  2. With the pull back spring installed, adjust the pull back spring lever B until an 8lb load is required to push pedal off Bumper. Adjustment may be made before 3709574 rod is assembled.
  3. Adjust offset rod E to allow 3/4" to 1" of free travel of pedal before the clutch begins to release, then lock in place.
- 3-A Optional with Note 3  
To obtain proper travel of clutch pedal; Before the clutch begins to release adjust nut F until gap between it & throw-out Lever B is taken up, then back off Nut F two turns and lock into place.

SEE LUBRICATION INSTRUCTION

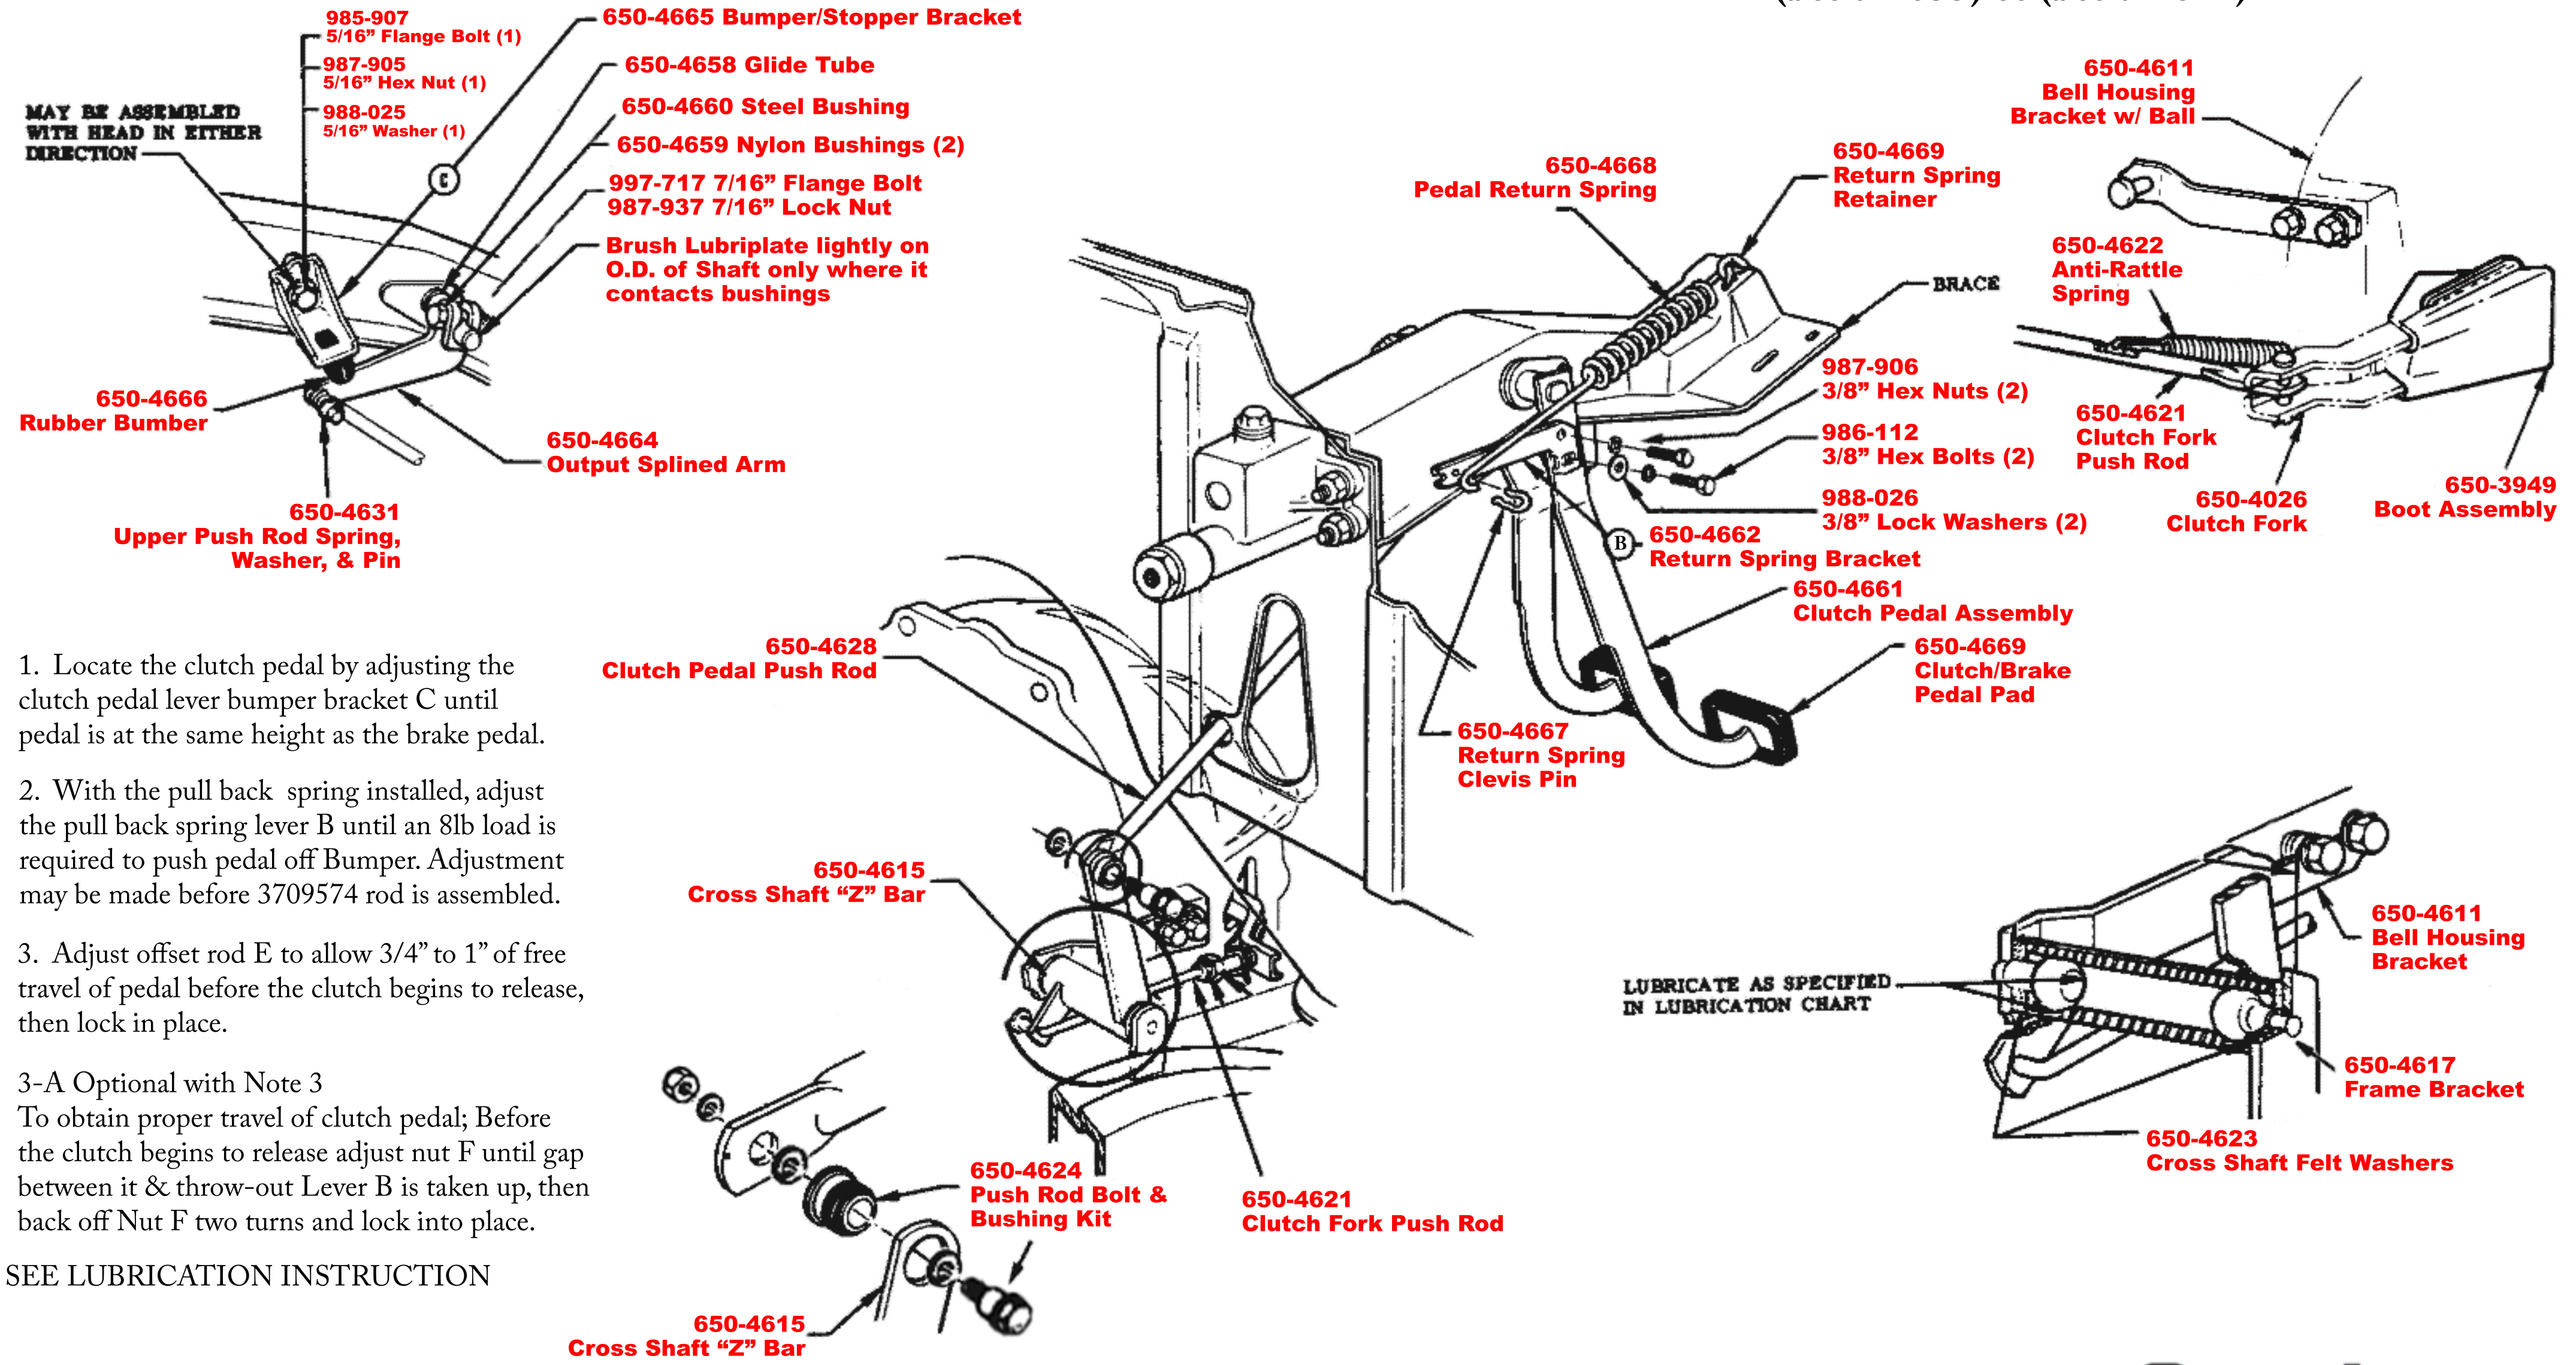