CLUTCH PEDAL LINKAGE ADJUSTMENT INSTRUCTIONS

1957 CHEVY (#650-4634) & (#650-4643)

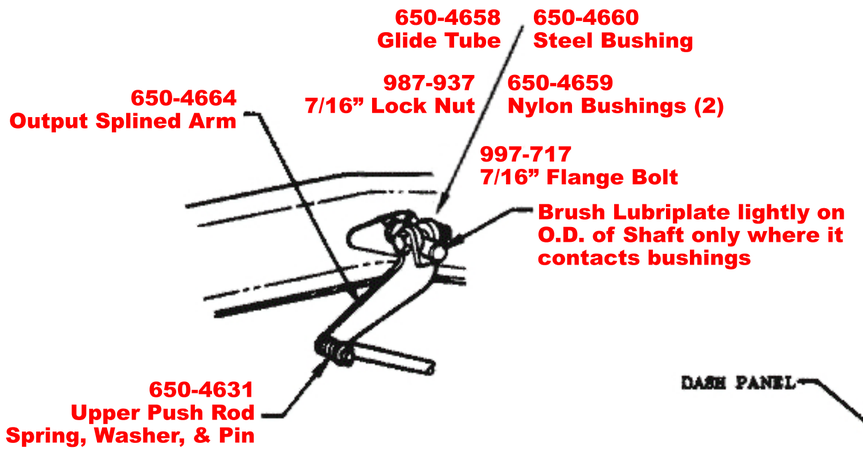



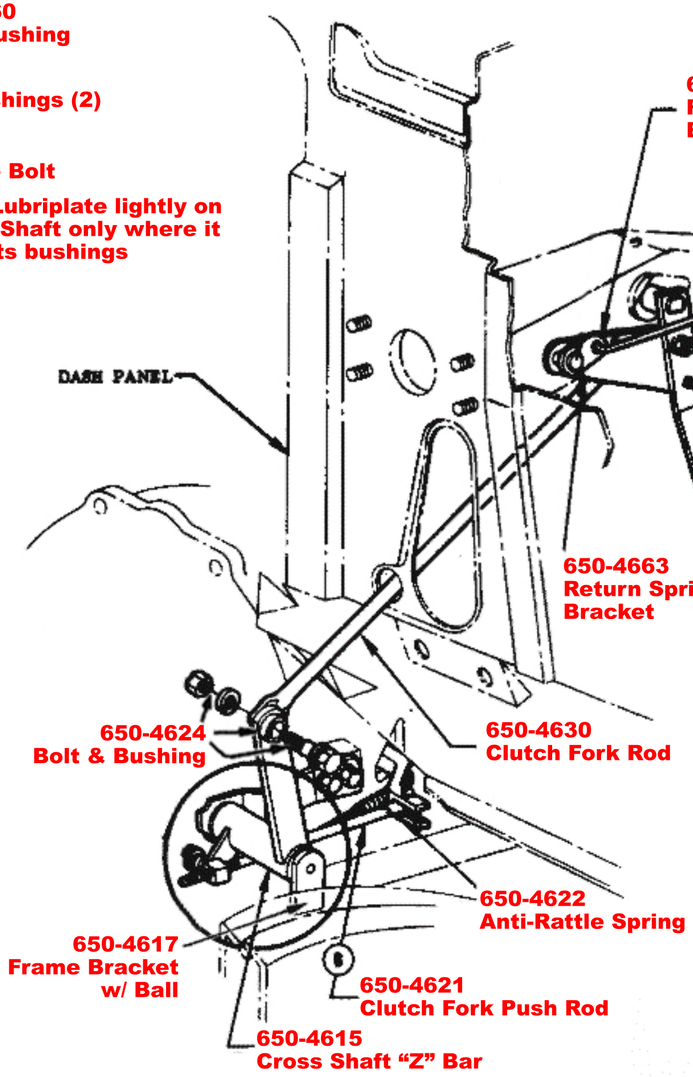

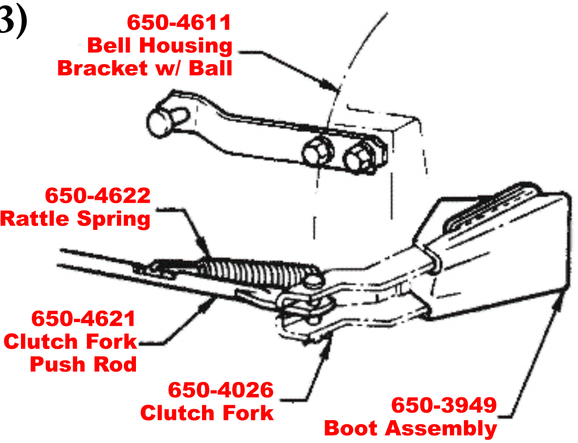

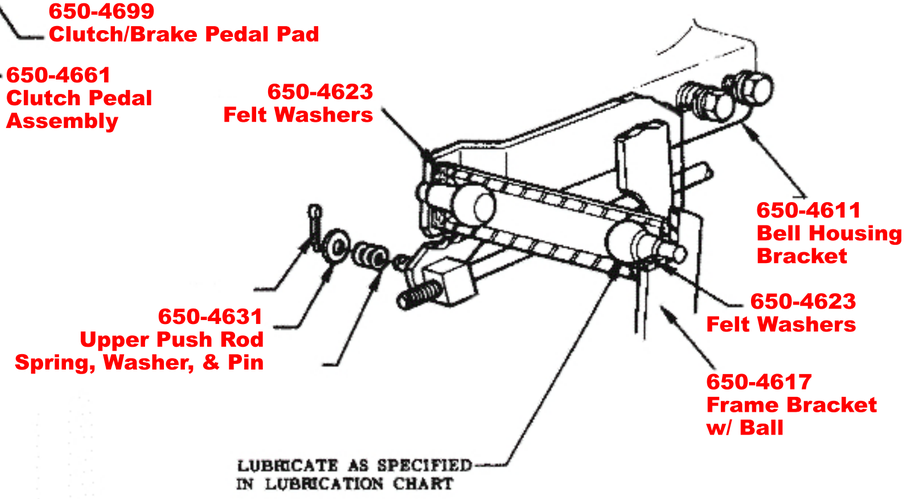

1. Adjust Swivel (A) on Rod (B) to allow 3/4" to 1" of free pedal travel before the clutch begins to disengage.
2. Reassemble the Swivel, this may be done as follows:
3. With Swivel (A) Disconnnected from lever, & Rod (B) installed in fork, move the rod rearward until clearance between throwout bearing and clutch fingers is eliminated (by feel).
4. Holding the rod lightly in the same postion as in step 3, adjust Swivel (A) until it touches the rear hole in lever (See view E)
5. Assemble swivel in lever & lash will be 3/4" to 1" at the pedal.

SEE LUBRICATION INSTRUCTION

Southwest Speed