




Thank you for purchasing our 500 litre Prestige Georgian rain water butt planter.

Water butts can be installed either with a diverter which also acts as an overflow or with direct rainwater inlet and separate overflow. The benefit of a diverter is it also acts as the overflow, however the yield will depend on the diverter selected. The benefit of a direct inlet is that this allows all the water to be fully captured instead of a proportion, combining this with a leaf catcher allows visible and accessible maintenance. A direct inlet however requires a separate overflow.

### **Diverter installation**

Please follow the instructions provided with the diverter. Ensure that the diverter sits below the planter level as shown on the diagram below.

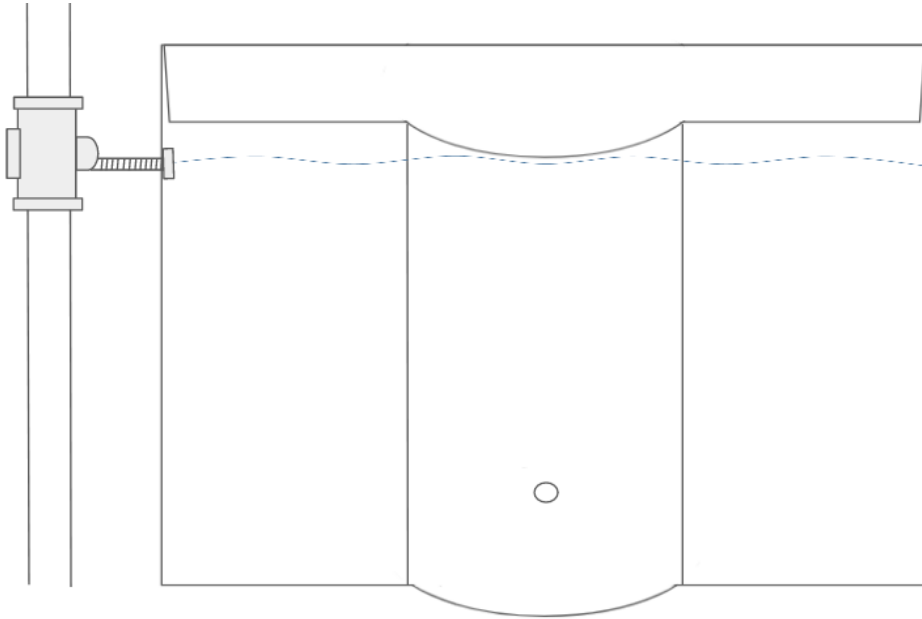

## Offset kit / overflow installation

To install the leaf catcher, simply drill a hole the same diameter as the leaf catcher spigot then place the leaf catcher in the hole and sit the downpipe in the leaf catcher (see image below). Alternatively a leaf catcher can be placed directly into one of the existing access holes.

To install the overflow, drill a hole the same diameter as the overflow (ensure that the overflow sits just below the planter as shown on the image below).

