


# Platin Eco Plus Package

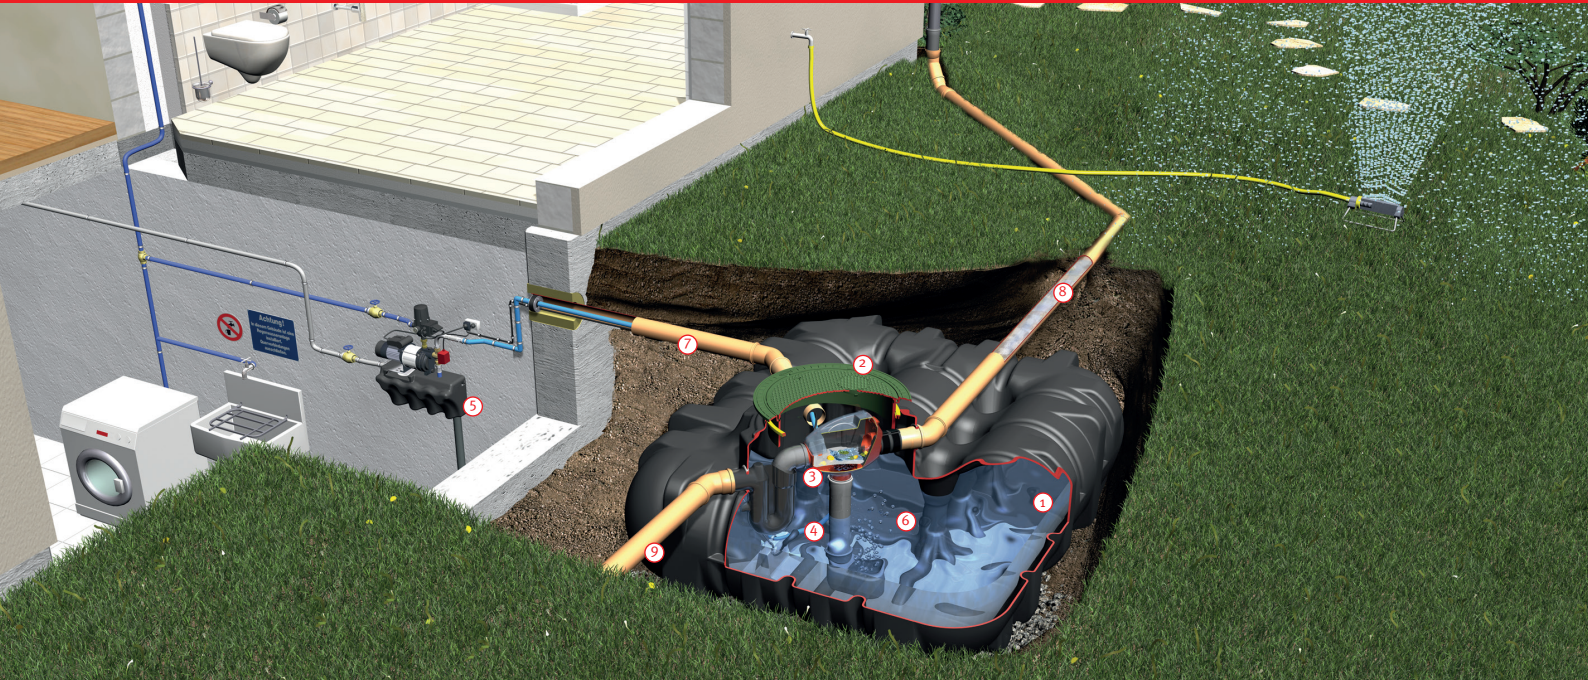

## Platin Eco Plus package

- Simple & quick to install.
- The Eco Plus is a wall mounted pump which supplies harvested rainwater on demand to WCs, washing machine & any external taps
- The black cistern at the base of the Eco Plus is filled with mains water. The water is drawn from this cistern when the rainwater in the Platin tank is low. This gives the system a mains-water back up.
- Innovative float sensor detection on the Eco Plus unit ensures that the household is constantly supplying water to the property but only the amount necessary.
- Maintenance and servicing of the Eco Plus is straight forward as the pump is located above ground where it can be easily accessed.

## Scope of supply

- ① Underground tank (choice of tanks available, sizes vary according to property type)
- ② Telescopic lid (choice of telescopic lid available, depending on tank location)
- ③ Filter (Minimax filter supplied in accordance with type of tank)
- ④ Floating water intake
- ⑤ Eco Plus unit
- ⑥ Float sensor (connected from Eco Plus unit to the underground tank)

## Supplied by others

- ⑦ 100mm diameter duct pipe to contain; float sensor cable and rainwater feed
- ⑧ 100mm diameter drainage pipe connected from downpipes to the inlet at the top of the tank (all downpipes brought into one pipe for connection to the filter)
- ⑨ 100mm diameter pipe for overflow from the tank to mains drainage network or soakaway

Dimensions/weight	1,500 litres (400 US gallons)	3,000 litres (800 US gallons)	5,000 litres (1,350 US gallons)	7,500 litres (1,980 US gallons)
Length (l)	2,100mm (82.6")	2,450mm (96.5")	2,890 (113.8")	3,600 (141.7")
Width (w)	1,250mm (49.2")	2,100mm (82.7")	2,300mm (90.6")	2,250mm (88.6")
Height of tank shoulder (h)	700mm (27.5")	735mm (28.9")	950mm (37.4")	1250mm (49.2")
Height of dome collar (hd)	315mm (12.4")	315mm (12.4")	315mm (12.4")	315mm (12.4")
Ø tank dome (d)	800mm (31.5")	800mm (31.5")	800mm (31.5")	800mm (31.5")
Weight	80kg	170kg	240kg	360kg

