


HH pickups Assembly Instructions

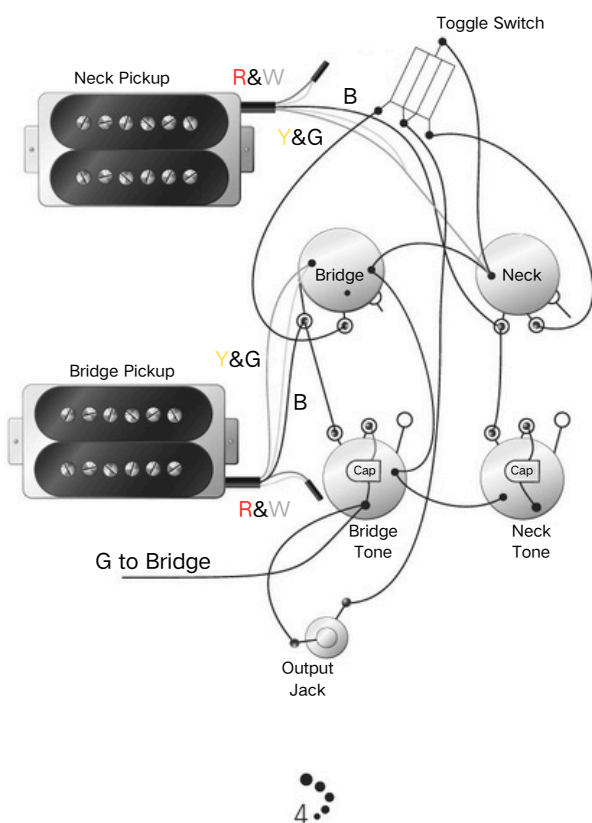


Johnny Eleca

Attention: Please read the following when using:

- The pickup magnet uses Alnico 2 or Alnico 5 materials.
- Before assembly, please measure the DC resistance of the pickup. The black and white wires of the Humbucker pickup form one group, and the red and yellow wires form another group. Connect the red and white wires, then connect the black and yellow wires to measure the resistance of the pickup.
- This product complies with the EU RoHS directive for lead-free standards. Please use lead-free solder when soldering.
- After assembly, please check whether the shielding ground wire is effective; otherwise, noise may occur.
- The optimal distance between the pickup and the strings is 2-3 mm.
- Removing the pickup will cause damage and it will not work.
- Please refer to the wiring diagram to connect the pickup wires.

HSH pickups Assembly Instructions

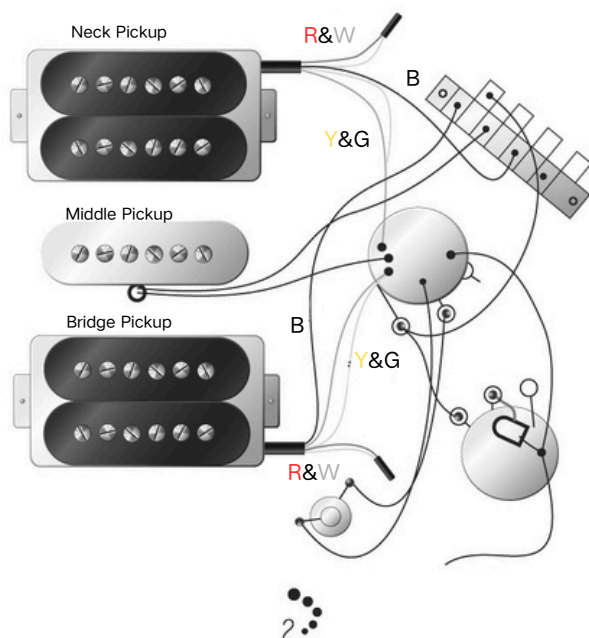

SSS pickups Assembly Instructions

