




Post Office Box 24238
 Tempe, AZ 85285
 (602) 438-7052
 FAX (602) 438-7072
 www.energyoneclutches.com

PART # BB-21

BUELL BLAST SMOKE THE COMPETITION!

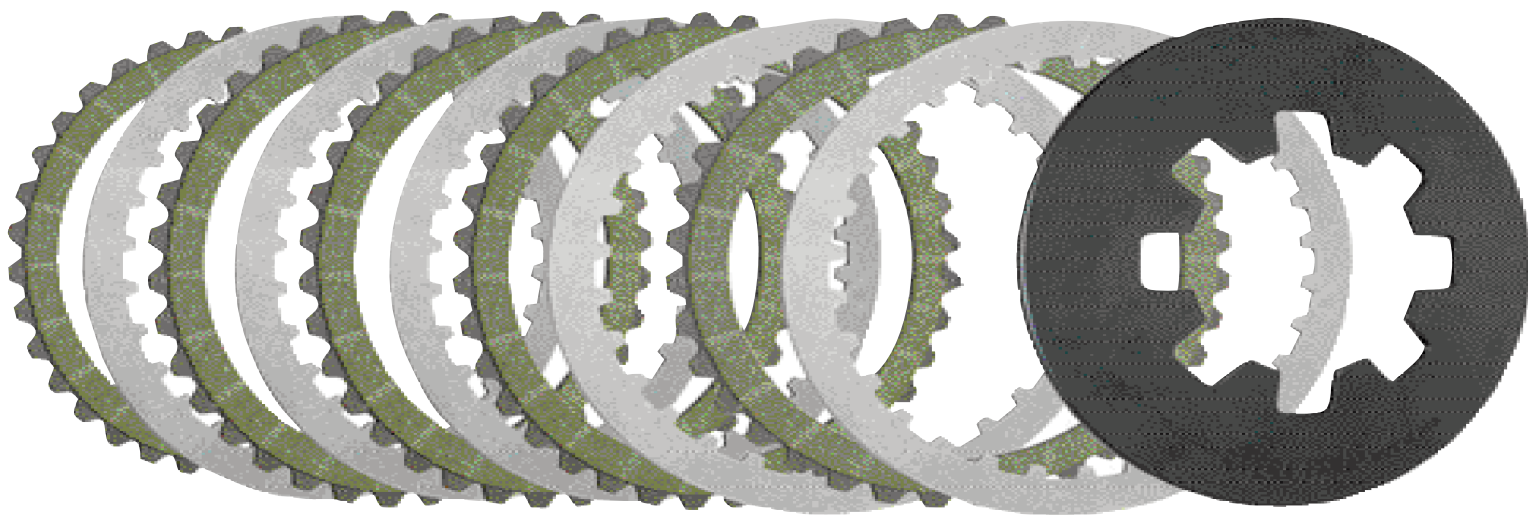

This kit consists of 5 friction, 5 steel plates and a 15% stronger than stock diaphragm spring. Plates should be pre-soaked in the same fluid you will be using in the bike for about 10-15 minutes. The type of fluids we recommend are any HD petroleum based, non-synthetic, primary oil, as light weight as possible, or even a good petroleum based motor oil such as 10/40 or 20/50 in weight. You can even use ATF Type F or B&M Trickshift.

THE USE OF SYNTHETICS IS NOT RECOMMENDED AS THEY TEND TO CAUSE SLIPPAGE.

Start with a friction plate and end with a steel plate. You must use all pieces of this kit. Do not mix old plates with the new plates.

These are just some helpful hints. For further technical assistance, always *refer to your owners manual*. Feel free to give us a call (602) 438-7052.

www.energyoneclutches.com