


GENERAL INSTRUCTIONS FOR NO-SLIP TAPES

IMPORTANT NOTICE TO USER: The following procedure will install No-Slip Tape about 1/2" away from edge of step. We do not recommend installation on the edge of step. Please read through entire instructions before you begin installation. Install supplied sample(s) to evaluate and determine suitability of the No-Slip Tape solution on your surface. Thank-you for your purchase!


REQUIRED TOOL: Roller (e.g. bread dough roller pin or our recommended roller which is available for purchase).

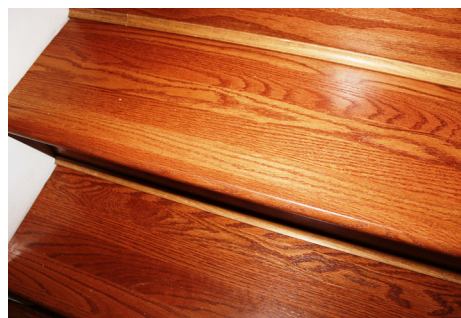

1. Clean stair surface – surface must be free from dirt and oils. Use rubbing alcohol to clean surface. The alcohol will remove any oils and give you a clean dry surface in minutes. It is very important that the surface is completely dry.




2. Place No-Slip Tape at about 1/2" from edge of step as shown above. There should be equal clearance on the right and left sides of No-Slip Tape. Non-Slip material should be facing upward.

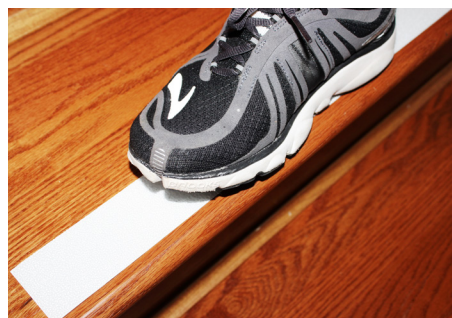


3. Place a foot on left side of No-Slip Tape, roll back the left edge of No-Slip Tape, and peel a small portion of backing paper to expose adhesive.



4. Press exposed adhesive onto stair tread while maintaining No-Slip Tape alignment at about 1/2" from edge of step. Continue until all backing paper is removed.

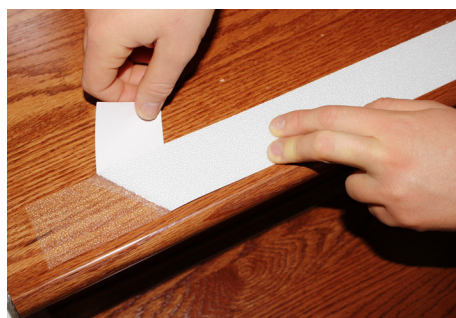

5. Press a roller against No-Slip Tape to activate adhesive and remove any air pockets. Rolling will also permit the sub-surface color to transmit through our "Clear" No-Slip Tape and create near-transparency.

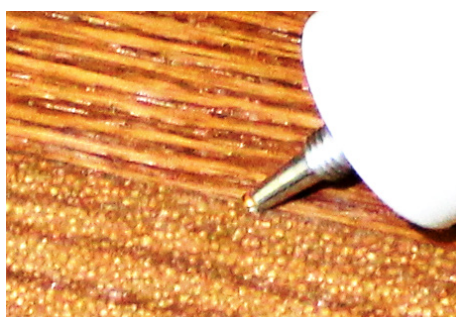

(OPTIONAL) : Use our optional **EDGE SEALER** to prevent pet hair and the like from collecting around the edges of No-Slip Tapes. We highly recommend the Edge Sealer for pet owners and very high traffic environments. You'll need to apply only a very small amount around the edges of your installed No-Slip Tapes. Simply remove the cap off the Edge Sealer to expose the nozzle. Point nozzle to edge of installed No-Slip Tape and move nozzle around all edges while at the same time pressing gently on tube to allow a bead of Edge Sealer to come out and seal the edges of No-Slip Tape. Allow 5 minutes to dry. You only need a thin film around the edges.

6.(OPTIONAL) Repeat steps 2 through steps 5 for optional "parallel strip application" (see note below). Install strips about an inch apart.


NOTE: For even more traction we recommend a "parallel strip application" where two strips of No-Slip Tapes are installed in parallel at about an inch apart. Our research revealed that the ball of your foot will often find a landing between the parallel No-Slip Tapes and give you superior non-slip confidence when engaging the stairs. Nonetheless a single strip per step will also provide adequate traction.

RETURN POLICY: Return any unused item within 30 days for a full refund of purchase price.

REMOVAL: On most surfaces you should be able to hand-peel, with some effort, to remove. Another option is to use a heat-gun or blow-dryer to warm-up the material before removing. You may use a plastic paint scraper to lift the edges. An old credit-card may work the same.

IMPORTANT NOTICE TO USER: PRODUCT USE: Our solution balances safety, ease of application, and removal. However there are factors beyond our control and uniquely within user's knowledge and control that can affect the use and performance of No-Slip Tapes in a particular application. Given the variety of factors that can affect the use and performance of No-Slip Tapes, user is solely responsible for evaluating No-Slip Tapes and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty: ANSWER VIEW TECHNOLOGIES INCORPORATED MAKES NO EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Limitation of Liability: Except where prohibited by law, Answer View Technologies Inc. will not be liable for any loss or damage arising from the use of No-Slip Tapes, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.**

THANK YOU FOR YOUR PURCHASE.

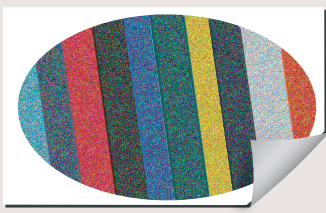

No-Slip Strip

Got Slippery Stairs?

1-877-222-1848

Hours: M - F
9am - 5pm EST

GENERAL INSTRUCTIONS FOR NO-SLIP TAPES WITH MEASURE N-ALIGN TECHNOLOGY

IMPORTANT NOTICE TO USER: The following procedure will install No-Slip Tape about 1/2" away from edge of step. We do not recommend installation on the edge of step. Please read through entire instructions before you begin installation. Install supplied sample(s) to evaluate and determine suitability of the No-Slip Tape solution on your surface. Thank-you for your purchase!


REQUIRED TOOL: Roller (e.g. bread dough roller pin or our recommended roller which is available for purchase).




1. Clean stair surface – surface must be free from dirt and oils. Use rubbing alcohol to clean surface. The alcohol will remove any oils and give you a clean dry surface in minutes. Important: Make sure that the surface is completely dry before proceeding.



2. Place No-Slip Tape at edge of step as shown above. There should be equal clearance on the right and left sides of No-Slip Tape. Non-Slip material should face upward.

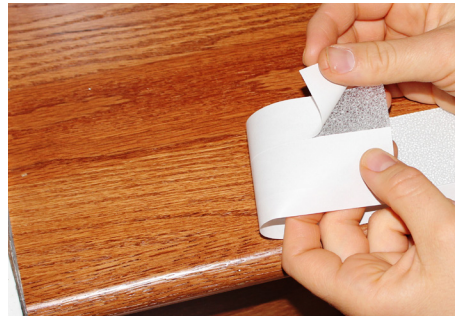

3. Roll back the left edge of No-Slip Tape and peel back the right half of the release liner as shown above to expose a small portion of adhesive.

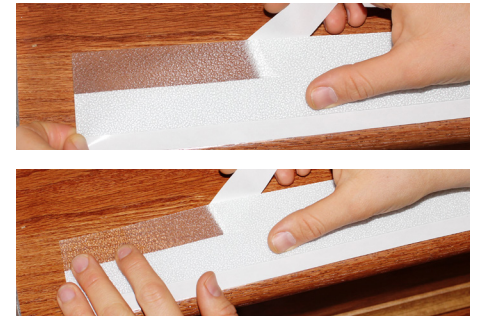

4. Verify that front edge of No-Slip Tape is aligned with front edge of step and then press the exposed adhesive onto stair surface as shown above.




5. Keep No-Slip Tape aligned with front edge of step, then peel remaining release liner on the right half of No-Slip Tape, while at the same time pressing exposed adhesive onto stair surface.



6. Return to left side of No-Slip Tape and slowly peel remaining release liner which is on the left half of No-Slip Tape. Press exposed adhesive onto stair surface.



7. Press a roller against No-Slip Tape to activate adhesive and remove any air pockets if any. Rolling will also permit the sub-surface color to transmit through the No-Slip Tape and create near-transparency.

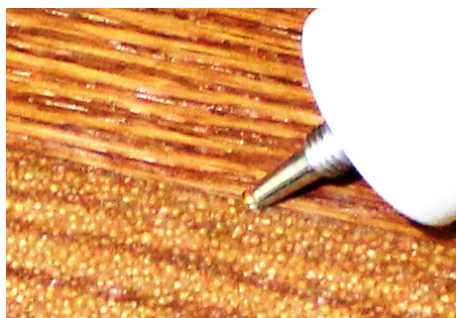

(OPTIONAL) : Use our optional **EDGE SEALER** to prevent pet hair and the like from collecting around the edges of No-Slip Tapes. We highly recommend the Edge Sealer for pet owners and very high traffic environments. You'll need to apply only a very small amount around the edges of your installed No-Slip Tapes. Simply remove the cap off the Edge Sealer to expose the nozzle. Point nozzle to edge of installed No-Slip Tape and move nozzle around all edges while at the same time pressing gently on tube to allow a bead of Edge Sealer to come out and seal the edges of No-Slip Tape. Allow 5 minutes to dry. You only need a thin film around the edges.

8.(OPTIONAL) Repeat steps 2 through steps 5 for optional "parallel strip application" (see note below). Install strips about an inch apart.

NOTE: For even more traction we recommend a "parallel strip application" where two strips of No-Slip Tapes are installed in parallel at about an inch apart. Our research revealed that the ball of your foot will often find a landing between the parallel No-Slip Tapes and give you superior non-slip confidence when engaging the stairs. Nonetheless a single strip per step will also provide adequate traction.

RETURN POLICY: Return any unused item within 30 days for a full refund of purchase price.

REMOVAL: On most surfaces you should be able to hand-peel, with some effort, to remove. Another option is to use a heat-gun or blow-dryer to warm-up the material before removing. You may use a plastic paint scraper to lift the edges. An old credit-card may work the same.

IMPORTANT NOTICE TO USER: PRODUCT USE: Our solution balances safety, ease of application, and removal. However there are factors beyond our control and uniquely within user's knowledge and control that can affect the use and performance of No-Slip Tapes in a particular application. Given the variety of factors that can affect the use and performance of No-Slip Tapes, user is solely responsible for evaluating No-Slip Tapes and determining whether it is fit for a particular purpose and suitable for user's method of application. **Warranty: ANSWER VIEW TECHNOLOGIES INCORPORATED MAKES NO EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Limitation of Liability: Except where prohibited by law, Answer View Technologies Inc. will not be liable for any loss or damage arising from the use of No-Slip Tapes, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.**

THANK YOU FOR YOUR PURCHASE.