
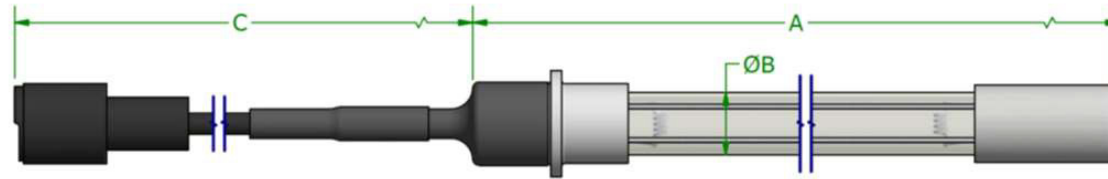


GSL/GTL-type High Output Lamp Specifications

GTL = GSL w/shatterproof coating



Part No	Lamp Watts (W)	Lamp Voltage (V)	UVC Watts (254nm)	Intensity @ 1m ($\mu\text{W}/\text{cm}^2$)	(A) Base Face to End ($\pm 3\text{mm}$)	(B) Lamp Diameter (mm)	(C) Cable Length (mm)	Lamp Current (mA)	Rated Average Life (hours)
GSL-18 GTL-18	40	55	10	128	386	15	167	800	16,000
GSL-24 GTL-24	55	75	16	198	538	15	167	800	16,000
GSL-36 GTL-36	87	110	28	260	843	15	167	800	16,000
GSL-48 GTL-48	119	155	39	300	1148	15	167	800	16,000
GSL-60 GTL-60	151	194	54	395	1453	15	167	800	16,000

American Ultraviolet

212 S Mt Zion Road, Lebanon, IN, 46052, USA

www.americanultraviolet.com