




2' x 2' EZ-Lock Tiles

EZ-Lock Interlock Rubber Tiles are the most popular commercial rubber tile for fitness and home gyms with low odor and a very tight interlocking tile system. The seams are almost invisible when interlocked and the commercial density creates a beautiful floor that is durable and easy to clean.


Material: **Rubber Flooring**

Style: **Interlocking Tiles**


Use: **Residential & Commercial**




Black

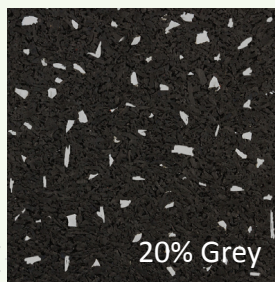

20% Grey

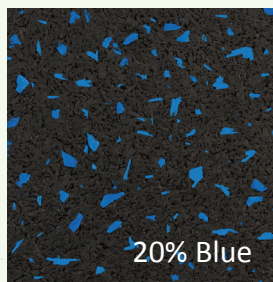

20% Blue

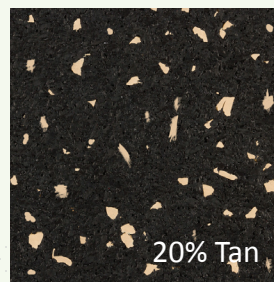

20% Tan



20% Brick Red

3/8" thick rubber is the most common thickness used in home & commercial fitness centers with general activities and low to moderate vertical impact on the floor. The EZ-Lock Tiles are capable of absorbing moderate impact; heavy foot traffic and are thick enough to stay in place without buckling in normal fitness applications.

No glue required for installation as the tiles are a loose lay product and can be installed easily with a box cutter and a straight edge.

The tiles are 25" x 25" x 3/8" to the outer tabs; making it a true 4 sq. ft of coverage after the tiles interlock.

RECOMMENDED USES

- Commercial Fitness Studios
- High School Fitness Centers
- University Fitness Centers
- Cross Fit
- Physical Therapy Clinics
- Chiropractic Clinics
- Residential Gyms
- Basements
- Garage Gyms



Athletic Textiles, LLC

877-219-5152 - Toll Free
www.rubberfloor.com



Product Specifications

2' x 2' EZ-Lock Tiles

Athletic Textiles Rubber is produced from high quality recycled rubber materials from truck tires. The recycling saves energy, reduces oil consumption and keeps millions of pounds of rubber from tires out of landfills and oceans.


Our Rubber Flooring meets the indoor air quality and Volatile Organic Compound (VOC) emission requirements.

LEED & Rubber Flooring

MR4 - Recycled Content - Up to 90%
Post Consumer Recycled Content

MR5 - Locally Manufactured within
500 miles of Harrisburg, PA

EQ4 - Low Emitting Materials &
Adhesives meets SQAQMD 1168

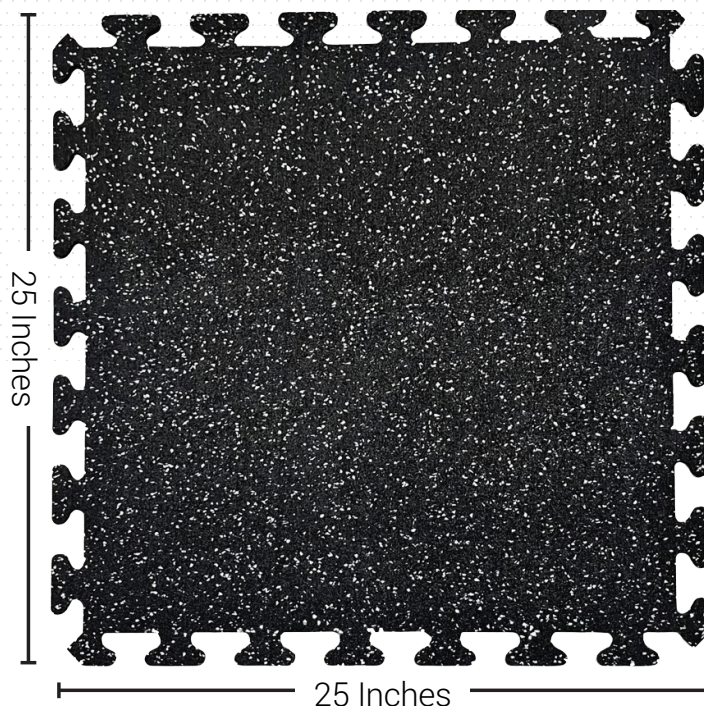

Thickness	
US Measure	Metric
3/8"	9 mm
Coverage: 4 sq. ft. / tile	

Density: 60 pcf - 80 pcf

Hardness: 60+/-5

Tear Strength: 70 pli min - 80 pmi min

Elongation: >75%

Tensile Strength: >200 PSI

Force Reduction: 12.9%

Energy Restitution: 85%

Abrasion Resistance: <1.7g, 1000 cycles

Static Load Limit: 0.001" @250 PSI

Resistance to Impact: 14 N/m

Resistance to Indentation: 0.1mm

Vertical Deformation: 1.4mm

Corners/Borders/Centers:

Corners, borders and center tiles are available in this product and may help reduce installation time and cutting.



Athletic Textiles, LLC

877-219-5152 - Toll Free
www.rubberfloor.com