



1 Remove legs, or castors, from bed base, and flatten protruding staples.




2 Remove backing from rubber sealing disk to expose adhesive surface.

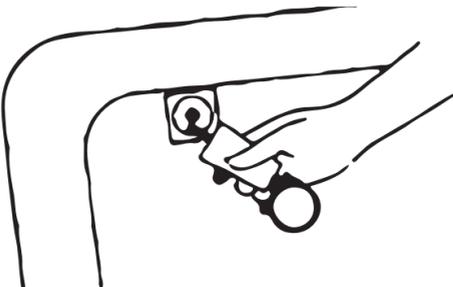


3 Place rubber sealing disks over each leg port, leaving screw hole exposed.

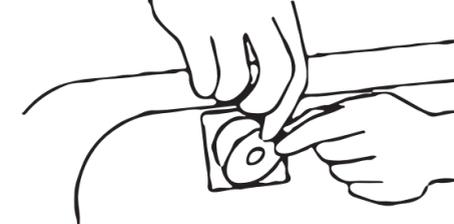


4 Make sure rubber sealing disks are in correct position over all leg ports, forming a good seal.

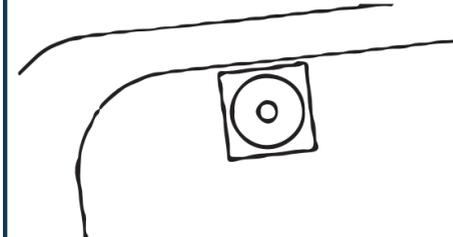


5 Once all leg ports are sealed, begin enclosing bed base in the protector from one end. Avoid friction burns by not pulling, or scraping, base on floor with BugLock® fabric in between.

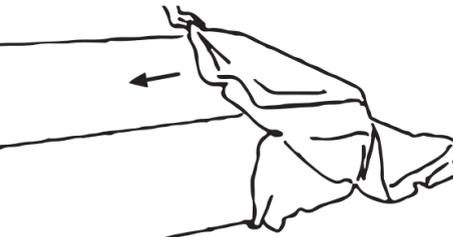


6 Continue enclosing bed base in protector, gradually.

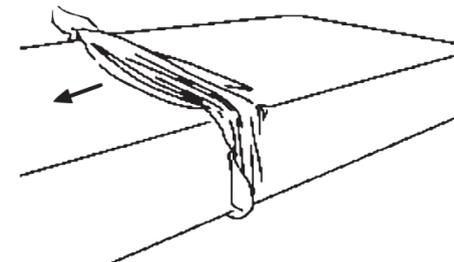


7 Ensure protector is fitted to bed base, with only the zipper are exposed.

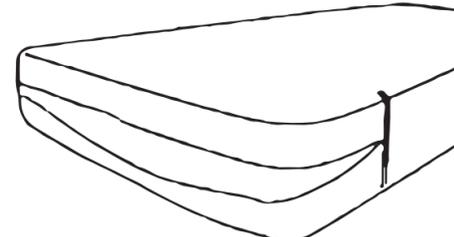

8 Start closing the zip, avoiding a zip malfunction, by pulling both sides as close as possible.

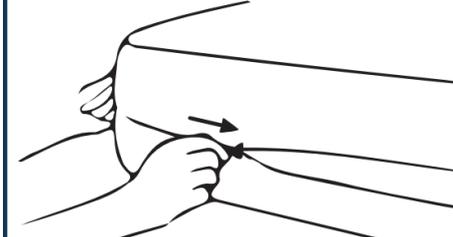

9 Zip all the way around the bed base.

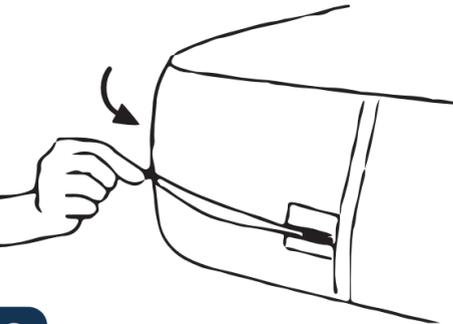

10 Make sure zip is closed all the way and fastened securely. For added protection, use the SecureSeal® lock-tie provided, to fasten the zipper to the anchor point. This forms a tamper-proof seal.




11 Check that seams are straight, and that the protector is stretched uniformly over the base. Then, locate the positions of the leg ports with your finger. It is important to get this right, as holes will be made in these positions.




12 Push bed legs, or castors, into leg ports, turning clockwise, and then anti-clockwise to cut a hole through the fabric of the protector, being careful not to rip it more than required to replace the leg.




13 Screw in all of the bed legs, or castors, securely.

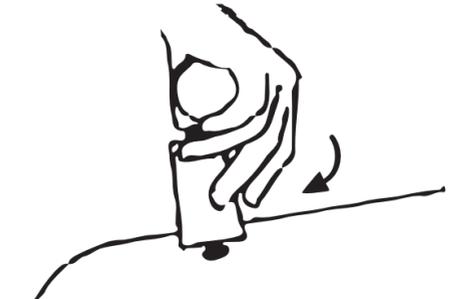

14 Make sure all bed legs, or castors, are screwed in, before flipping bed base back over.

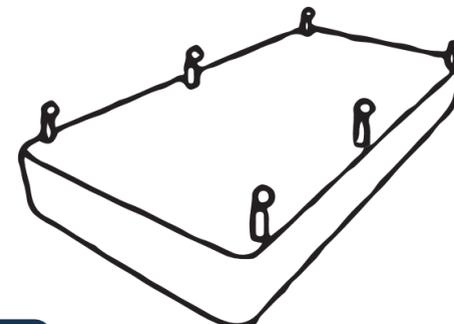

15 Flip bed base over, and position mattress on top.

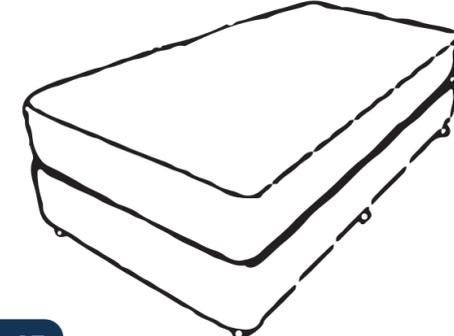

YOUR BED BASE IS NOW FULLY PROTECTED!

YOU ARE NOW READY TO FIT A MATTRESS PROTECTOR TO YOUR MATTRESS.