

Prestige

 commercial carpet

ARTICULATE



Style:	7H0X0 Articulate
Construction:	Multi-Level Pattern Loop
Fiber:	100% Pivotal™ PET
Dye Method:	Solution Dyed
Tufted Weight:	16 oz.
Gauge:	1/10
Stitches per Inch:	10
Finished Pile Thickness:	0.121"
Total Thickness:	0.242"
Average Density:	4760
Product Size:	24" x 24"
Primary Backing:	Synthetic
Secondary Backing:	strataworx™ tile
Protective Treatments:	SSP® Shaw Soil Protection

TESTING

Radiant Panel:	Class I (ASTM E-648)
Smoke Density:	<450 (ASTM E-662)
Static Control:	<3.5 kv (AATCC-134)
Antimicrobial:	Passes (AATCC-174)*

*When using 5036S adhesive


ADA Compliant:

This product meets the guidelines as set forth in the Americans with Disabilities Act for minimum static coefficient of friction of 0.6 for accessible routes.

PACKAGING

Tiles per Carton:	20 pcs
Yards per Carton:	8.88 sq yd

INSTALLATION METHODS

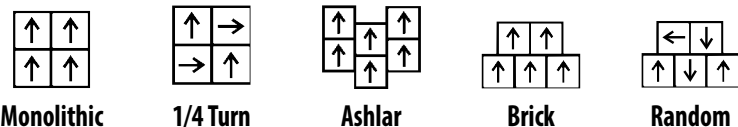

Monolithic

1/4 Turn

Ashlar

Brick

Random

RECOMMENDED ADHESIVES

S5000	5036S Antimicrobial (AATCC-174)
S100S	S5001 [1 gal pail]

WARRANTIES

Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx

ENVIRONMENTAL CERTIFICATION

Green Label Plus Certification Number GLP8233

Specifications are subject to nominal manufacturing variance.

Material supply and/or manufacturing processes may necessitate changes without notice.