

# Prestige

 commercial carpet

## DECODE



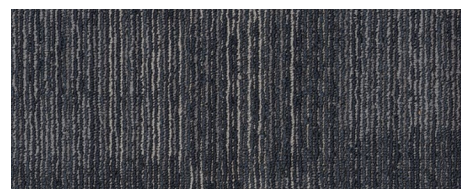
00410 CONCERT



00214 COMMUNICATE




00218 COORDINATE



00410 CONCERT



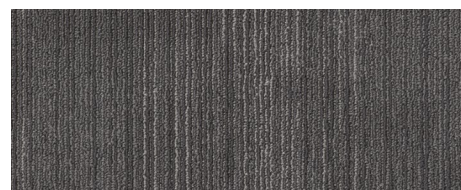00530 AFFILIATE



00536 CONJOIN



00710 ALLY

Style:	7H0Y9 Decode
Construction:	Multi-Level Pattern Loop
Fiber:	100% Solution Q® Nylon
Dye Method:	Solution Dyed
Tufted Weight:	16 oz.
Gauge:	1/10
Stitches per Inch:	10
Finished Pile Thickness:	0.097"
Total Thickness:	0.22"
Average Density:	5938
Product Size:	18" x 36"
Primary Backing:	Synthetic
Secondary Backing:	strataworx™ tile
Protective Treatments:	SSP® Shaw Soil Protection

## TESTING

Radiant Panel:	Class I (ASTM E-648)
Smoke Density:	<450 (ASTM E-662)
Static Control:	<3.5 kv (AATCC-134)
Antimicrobial:	Passes (AATCC-174)*

\*When using 5036S adhesive

## ADA Compliant:










This product meets the guidelines as set forth in the Americans with Disabilities Act for minimum static coefficient of friction of 0.6 for accessible routes.

## PACKAGING

Tiles per Carton:	14 pcs
Yards per Carton:	7 sq yd

## INSTALLATION METHODS

## RECOMMENDED ADHESIVES

									S5000
Ashlar	Monolithic	Herringbone	Basketweave	Half Basket	Boxed In	Brick	Stagger	Offset	5036S Antimicrobial (AATCC-174)
									5100S
									S5001 [1 gal pail]

## WARRANTIES

Carpet Tile 15 year Commercial Limited Warranty with Stain and Color for StrataWorx

## ENVIRONMENTAL CERTIFICATION

Green Label Plus Certification Number GLP2671

Specifications are subject to nominal manufacturing variance.

Material supply and/or manufacturing processes may necessitate changes without notice.