
Prestige commercial carpet

IMPERATIVE

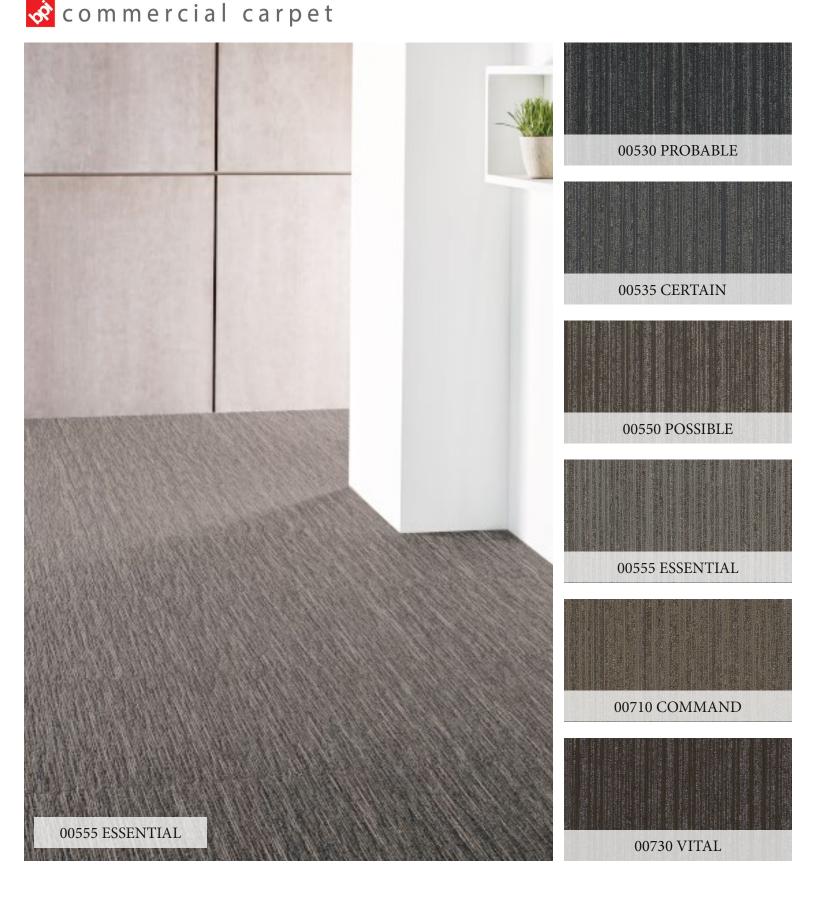

Prestige

💸 commercial carpet

IMPERATIVE

Style: Construction: Fiber: Dye Method: Tufted Weight: Gauge: Stitches per Inch: Finished Pile Thickness: Total Thickness: Average Density: Product Size: Primary Backing: Secondary Backing: Protective Treatments:

7H0Z0 Imperative Multi-Level Pattern Loop 100% Pivotal[™] PET Solution Dyed 15 oz. 1/10 9 0.115" 0.25" 4696 24" x 24" Synthetic strataworx[™] tile SSP® Shaw Soil Protection

TESTING

Radiant Panel: Smoke Density: Static Control: Antimicrobial: Class I (ASTM E-648) <450 (ASTM E-662) <3.5 kv (AATCC-134) Passes (AATCC-174)* *When using 5036S adhesive

ADA Compliant:

This product meets the guidelines as set forth in the Americans with Disabilities Act for minimum static coefficient of friction of 0.6 for accessible routes.

PACKAGING

Tiles per Carton:				20 pcs		
Yards per Carton:						8.88 sq yd
INSTALLATION METHODS				RECOMMENDED ADHESIVES		
↑↑ ↑↑ Monolithic	$\begin{array}{c} \uparrow \rightarrow \\ \rightarrow \uparrow \end{array}$ 1/4 Turn	↑ ↑ ↑ ↑ ↑ ↑ Ashlar	↑↑↑ ↑↑↑↑ Brick	←↓↓ ↑↓↓↑ Random	S5000 5100S	5036S Antimicrobial (AATCC-174) S5001 [1 gal pail]
WARRANTIES						
Carpet	Tile 15 ye	ar Comme	rcial Limite	ed Warra	nty with S	Stain and Color for StrataWorx
ENVIRONMENTAL CERTIFICATION						
Green	abol Plug	Certificat	ion Numb	or GIP	2722	

Specifications are subject to nominal manufacturing variance.

Material supply and/or manufacturing processes may necessitate changes without notice.

p1 02.22

For reference purposes only if printed or downloaded