


32" BUILT-IN GRILL **WITH REAR BURNER**

MODEL: BIG32RB

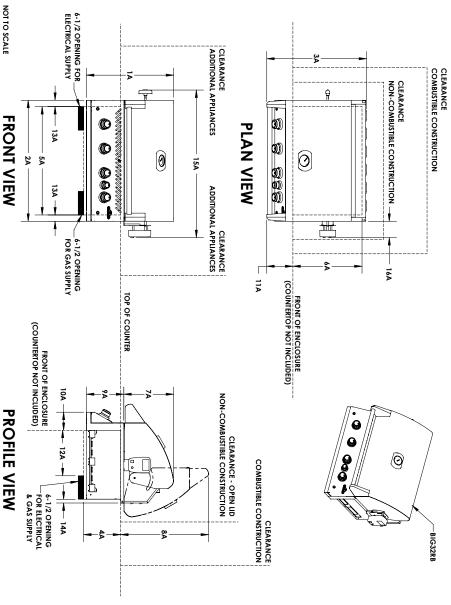

DIMENSIONS AND CLEARANCES

Refer to page 2 for unit with zero clearance liner

| 1A | 1A Overall height of appliance | 24 1/8 | 612 | د |
|-----------|--|-----------------|-------|-----|
|) | | 1 | 10 | C |
| 2A | Overall width of appliance | 33 1/2 | 851 | 1 |
| 3A | Overall depth of appliance | 27 5/8 | 702 | 2 |
| 4A | Cut-out height for appliance (min) | 10 1/4 | 260 | 0 |
| 5A | Cut-out width for appliance (min-max) | 30 - 32 | 762 - | 813 |
| 6A | Cut-out depth for appliance (min-max) | 19 3/8 - 19 3/4 | 492 - | 502 |
| 7A | Height from top of base to top of appliance | 13 3/4 | 349 | 9 |
| 8A | Height from top of counter to top of open appliance | 24 5/16 | 618 | ∞ |
| 9A | Height from top of base to bottom of appliance | 10 3/8 | 264 | 4 |
| 10A | Depth of control panel to front of enclosure | ហ | 127 | 7 |
| 11A | Depth from front of appliance to front of enclosure | 7 1/4 | 184 | 4 |
| 12A | Distance from front of enclosure to front side of openings for utilities | 12 5/8 | 321 | _ |
| 13A | Side flange width / distance to supply openings | 1 7/8 | 48 | |
| 14A | Rear flange depth / distance to supply openings | 1 3/4 | 44 | - |
| 15A | Overall width of rotisserie kit installed | 40 13/16 | 1037 | 37 |
| 16A | Distance from appliance to rotisserie motor | 4 1/2 | 114 | 4 |
| Z | MINIMUM CLEARANCES | | Z | M |
| Clear | Clearance to combustible construction | – back* | 17 | 432 |
| Clear | Clearance to combustible construction | - side* | 9 | 229 |
| Clearance | ance to non-combustible construction | tion – back* | 5 | 127 |
| Clear | Clearance to non-combustible construction | xion — side* | 5 | 127 |
| Dista | Distance between additional appliances* | is* | 15 | 381 |