

A152 Combination Lock

Special Notes

Before installing the Combination Lock, familiarise yourself with the operation and functions.

Unless manufactured to special order the default **User Code** is **3333**.


This code is common to all combination locks and it is very important that you set your own personal User Code.

Your lock is not secure until you have changed the default User Code.


General maintenance:

- Ensure that the cam moves freely and is not obstructed when operating the lock
- Do not use lubrication or oil on the lock cylinder or code wheels
- Do not expose the lock to external factors EG moisture, dust or fire
- Do not insert any foreign objects into any openings in the lock
- Clean the lock with a damp cloth – do not use any chemical cleaning products
- The combination lock is operable within a temperature range of 0°C to 50°C / 32°F to 120°F


Open the Lock

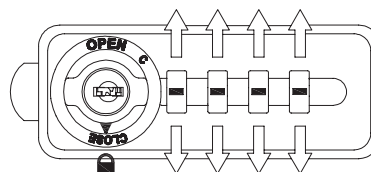

ENTER PERSONAL (****)
OR DEFAULT CODE (3 3 3 3)

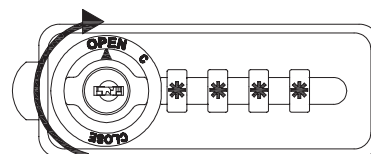

TURN THE KNOB TO 'OPEN'

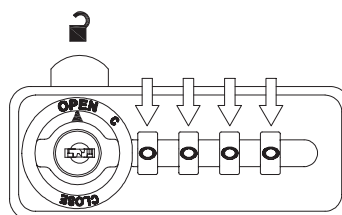


FOR SAFETY REASONS THE
CODE AUTOMATICALLY
SCRAMBLES TO 0-0-0-0




A152 Combination Lock


Change or Set a New User Code

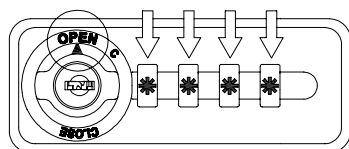

ENTER THE PERSONAL OR DEFAULT CODE AND OPEN THE LOCK. CODE SCRAMBLES TO 0-0-0-0




ENTER THE CODE AGAIN AND TURN THE KNOB TO "C". ENTER THE NEW CODE 'N N N N'.




TURN THE KNOB BACK TO "CLOSE". THE NEW CODE IS SET.


Emergency Key Override & Code Finder Function

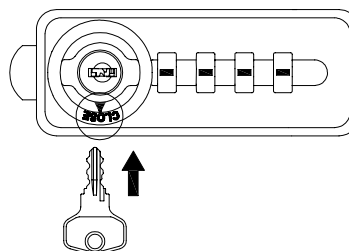

INSERT KEY INTO BARREL

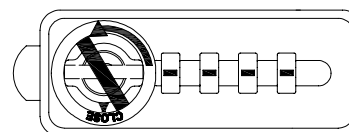

TURN KEY TO THE LEFT

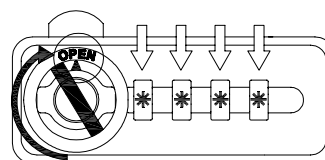

TURN KNOB TO "OPEN" TO IDENTIFY THE USER CODE.

REMOVE THE KEY AND TURN KNOB TO THE "CLOSE" POSITION. CODE SCRAMBLES TO 0-0-0-0. REFER TO INSTRUCTIONS TO SET NEW USER CODE