

MLPA

Cat. #

Job

Type

MCGREGOR®

Approvals



MOUNTING OPTIONS



1. Installation angle: 0-90°
2. Max Pole Size: 2-3/8"
3. Each rotation is 4°
4. Max Load Weight: 110lbs



1. Installation: wall mount or for Round Pole.
2. Pole size 4", 5" 6"
3. Max Load Weight: 110lbs




1. Installation: wall mount or for Round Pole.
2. Min Pole size 3"x3"
3. Max Load Weight: 110lbs



1. Installation angle: 0-180°
2. Max Pole Size: 2-3/8"
3. Each rotation is 30°
4. Max Load Weight: 110lbs

DIMENSIONS

unit: mm/inch

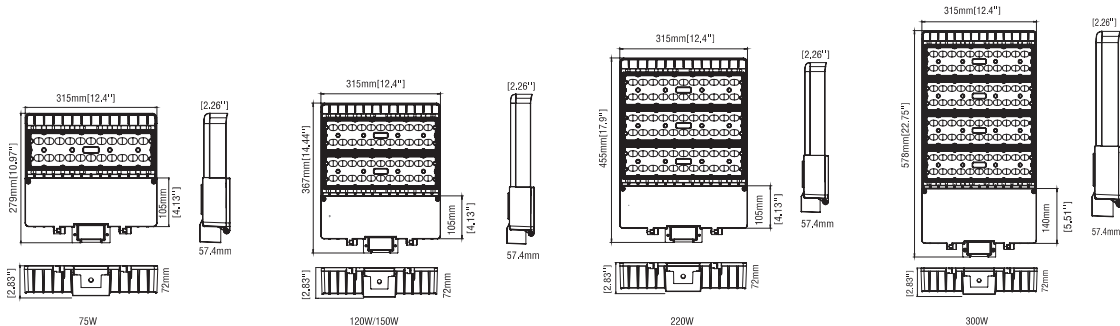


MCGREGOR®

© 2019 McGregor Lighting LLC All rights reserved.
Due to our continued efforts to improve our products, product specifications are subject to change without notice. McGregor Lighting LLC reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

McGregor Lighting LLC
support@mcgregorlighting.com
Website: mcgregorlighting.com

PHOTOMETRICS

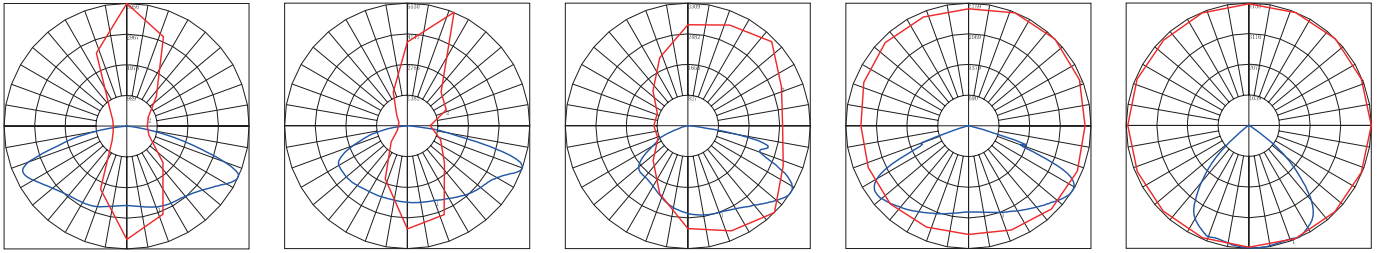

Specifications

Model#	Power	Lumens	LED Chip	CRI	CCT	Input Voltage	LED Driver	Operation Temp.	Life Hrs
MLPA	75	101251lm	Lumiled 3030	>70	4000K/5000K	100-277V	SOSEN	-40~+113°F -40~+45°C	>50,000hrs
MLPA	120	16200lm	Lumiled 3030	>70	4000K/5000K	100-277V	SOSEN	-40~+113°F -40~+45°C	>50,000hrs
MLPA	200	20250lm	Lumiled 3030	>70	4000K/5000K	100-277V/200-480V	SOSEN/MW	-40~+113°F -40~+45°C	>50,000hrs
MLPA	220	29700lm	Lumiled 3030	>70	4000K/5000K	100-277V/200-480V	MEANWELL	-40~+113°F -40~+45°C	>50,000hrs
MLPA	300	40500lm	Lumiled 3030	>70	4000K/5000K	100-277V/200-480V	MEANWELL	-40~+113°F -40~+45°C	>50,000hrs
MLPA	400	54000lm	Lumiled 3030	>70	4000K/5000K	100-277V/200-480V	MEANWELL	-40~+113°F -40~+45°C	>50,000hrs
MLPA	480	64800lm	Lumiled 3030	>70	4000K/5000K	100-277V/200-480V	MEANWELL	-40~+113°F -40~+45°C	>50,000hrs

Site, pathway, security, overhead door and entrance lighting.

Features

- » LED: LUM I LEDS SMD 3030. Up to 135LPW for fixture
- » Driver: 100-277VAC, 200-480VAC/50-60Hz, all DLC listed
- » Light Distribution: TypeII/ III/TypeIVN
- » Surge Protection: 4KV standard, 1 0KV/20KV for option
- » 3G Vibration Test: Passed
- » Salt-Spray Test: 30,000hrs
- » IK10 Rated
- » I P68 Rated
- » 5 years warranty

ORDER MATRIX



M	PLA	75	U	K	X	T	P	A
Company Name	Product Info	Wattage	Voltage	CCT	Mount	Lens	Power Supply	Accessories
M = McGregor	PLA = Area Light	75 = 75W 120 = 120W 150 = 150W 220 = 220W 300 = 300W	U = 120-277VAC H = 200-480VAC	W = 3000K N = 4000K C = 5000K	A = Slip Fitter B1 = Strait Arm B2 = Strait Arm2 C = Trunion D = U bracket	T2 = Type II T3 = Type III T4 = Type IV T5 = Type V TF = 90x120°	S = Sosen M = Meanwell Blank = N/A	S = Photo Sensor M = Motion Sensor Blank = N/A



MCGREGOR®

© 2019 McGregor Lighting LLC All rights reserved.
Due to our continued efforts to improve our products, product specifications are subject to change without notice. McGregor Lighting LLC reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

McGregor Lighting LLC
support@mcgregorlighting.com
Website: mcgregorlighting.com