

MBL01	Cat. #		MCGREGOR®
	Job	Type	
			Approvals



Annular Diffuser

Glow soft light around.



Reflective Cup

Gather light and make the coverage of the light larger.

Emergency Battery



Emergency battery pack would provide the necessary brightness in emergency situations. Applicable ambient temperature is 10°C (50°F) to 40°F (104°F).



Lamp bollard Round appearance for good decorative effect and harmony with various garden scenes.

DIMENSIONS

unit: mm/inch

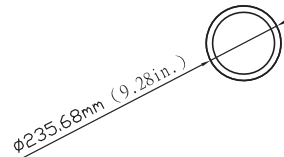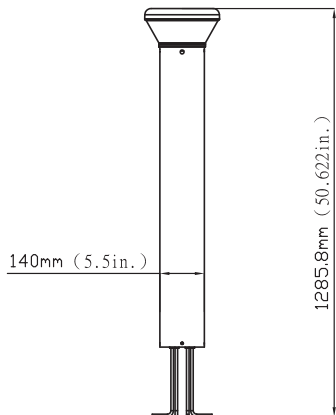

MCGREGOR®

© 2019 McGregor Lighting LLC All rights reserved.
 Due to our continued efforts to improve our products, product specifications are subject to change without notice. McGregor Lighting LLC reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

McGregor Lighting LLC
 support@mcgregorlighting.com
 Website: mcgregorlighting.com

PERFORMANCE DATA		4000K (70CRI)		5000K (70CRI)	
SYSTEM WATTS	VOLTAGE	LUMENS	LPW	LUMENS	LPW
26W	120-277V	2500lm	96 lm/W	2500lm	96 lm/W

ELECTRICAL DATA


Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	670	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09

Applications: Suitable for building entryways, walking paths and pedestrian plazas, as well as any other location requiring a low-mounting-height light source.

FEATURES

- » Efficacy higher than 96 lm/W with zero uplight while consumes 26W
- » Round appearance for good decorative effect, sized in 35ft height
- » Dark bronze polyester powder-coat inish
- » 360 degrees surround illumination with 80 CRI
- » 1-10V dimming and projected over 50,000 hrs life span
- » Operating temperature is -40°C to 45°C (-40°F to 113°F)
- » Optional emergency function for emergency needs
- » Robust ground cage pre-buried installation

ORDER MATRIX



FIXTURE TYPE	WATTAGE	VOLTAGE	CCT	Finish	BACKUP BATTERY (Option)	Internal Code
MBL01	26 26W	27V 120-277V	40K 4000K 50K 5000K	D Dark Bronze B Black W White SG Silver Grey	P0 120-277V Photocell Blank Without Photocell	Blank Alphanumeric



MCGREGOR®