
FOOT CAR INNOVATIONS

High Quality Instruments

Precision Tools

Professional Grade Accessories




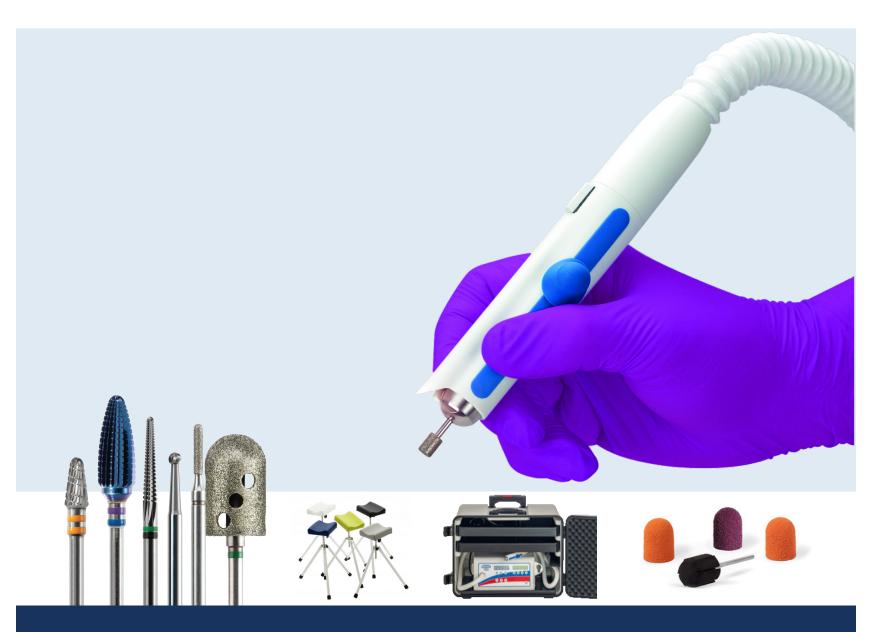

WWW.ROTATOOL.COM | SALES@ROTATOOL.COM | 1.866.515.7995

ROTATOO DELUXE 2





Rotatool[™] is setting the standard for podiatry units.

ULTRA-QUIET, LIGHT-WEIGHT, POWERFUL LIGHT SOURCE

The Deluxe 2 offers a high level of comfort while meeting the latest standards in technology. The ultra-quiet and powerful suction motor enables removal of most airborne dust from the treatment area. Thanks to the sleek handpiece shape with a diameter of only 19 mm, you can hold the handpiece like a pencil. The powerful light source ensures accuracy even in poor ambient light. The smart button on the handpiece provides quick access to preferred speeds. In addition, the new start/pause button allows easy start and pause of the unit during work, preventing accidental starts at high speeds. The powerful brushless motor runs at a speed of 6,000 to 40,000 rpm.

TECHNOLOGY

Speed: 6.000-40.000 rpm
Maintenance-free Brushless Suction Motor
Modern, easy-to-clean membrane keyboard
Extra large speed display
Displays information about: speed/left right direction, Suction leve
date and time, filter change and date of last inspection
3 preferred speed steps saved and called via program mode
Regular and reverse switch (left/right)
Works only with Micro Filter RT-H5179

TECHNICAL DATA


Size: W 273 x H 142 x D 235 mm (W 11" x H 5½" x D 9¼") *excludes exterior parts attached Suitable for all Hadewe carrying cases Total weight: 2.7 kg (6 lbs) Noise level: 49 db (55 db at full throttle)

HAND PIECE FEATURES

Powerful LED-light at the top of the hand piece Maintenance-free, Brushless Hand Piece Motor Patented Power Clamping System High torque, low vibration, silent running Suitable for all common burs of Ø 2.35 mm (3/32") Two-fold sealing of the ball bearings Hand Piece: Ø ¾"-1", length: 5¾", weight: 5.29 oz There is a **Smart Key** at the bottom of the hand piece, which allows fast access to important functions. You can easily switch between preset speeds by pressing the key once, or turn the whole unit on/off by keeping it pressed.

The knob of the **Quick Chuck Device**, which allows you to change the tools easily and securely, has been made of TPE *(thermoplastic elastomer)*. TPE is a soft material that makes it comfortable to use the knob.

There is a Light Source, which is directly implemented at the hand piece, and which allows for ideal work conditions even when the external light sources are insufficient.





ROTATOO ESSENTIAL 2



BASE MODEL THAT IS ANYTHING BUT BASIC

The Essential 2 suction unit is a high-quality, ultra-quiet suction unit for professional foot care. Airborne dust is picked up directly by the point suction and reliably collected in the micro filter bag. The handpiece is equipped with our patented clamping system with a soft and comfortable knob made from TPE (thermoplastic elastomer). The handpiece offers the same ergonomic design as the Deluxe 2. The powerful brushless motor runs at a speed of 6,000 to 40,000 rpm. With two memory keys, saving speed and suction settings has never been easier.

TECHNOLOGY	TECHNICAL DATA	HAND PIECE FEATURES
Speed: 6.000-40.000 rpm	Size: W 273 x H 142 x D 235 mm (W 11" x H 5½" x D 9¼")	Maintenance-free, Brushless Hand Piece Motor
Maintenance-free Brushless Suction Motor	*excludes exterior parts attached	Patented Power Clamping System
Modern, easy-to-clean membrane keyboard	Suitable for all Hadewe carrying cases	High torque, low vibration, silent running
Extra large speed display	Total weight: 2.7 kg (6 lbs)	Suitable for all common burs of Ø 2.35 mm (3/32")
Regular and reverse switch (left/right)	Noise level: 49 db (55 db at full throttle)	Two-fold sealing of the ball bearings
Works only with Micro Filter RT-H5179		Hand Piece: Ø ¾"·1", length: 5¾", weight: 5.29 oz

CHANGING THE FILTER •

Check the status of your filter frequently. As soon as the display shows that a filter change is required, you only need to open the hatch at the side of the unit to replace the filter with a new one. The filter chamber is easily accessed and can be comfortably opened thanks to the magnet holders in the door. The Micro Filter Bags RT-H5179 are classified as class M filters by the BIA (Germany's Health & Safety Institute for the work environment) meaning they have dust retention capacity of 99.9%


* NOTE: Conventional paper filters (RT-H5115) cannot be used with RotatoolTM Essential 2 and RotatoolTM Deluxe 2 units.

SIMPLE & FAST HANDPIECE MAINTENANCE


Simple and fast maintenance of the basic components of the hand piece is a key benefit of the Rotatool™ units. The regular maintenance of the hand piece should take less than one minute to complete. Follow the steps detailed in the user manual provided with the unit. Regular cleaning and basic maintenance can be easily performed by the end user. Repairs and servicing should be performed by an authorized Rotatool™ technician.



PRECISION GERMAN MANUFACTURED

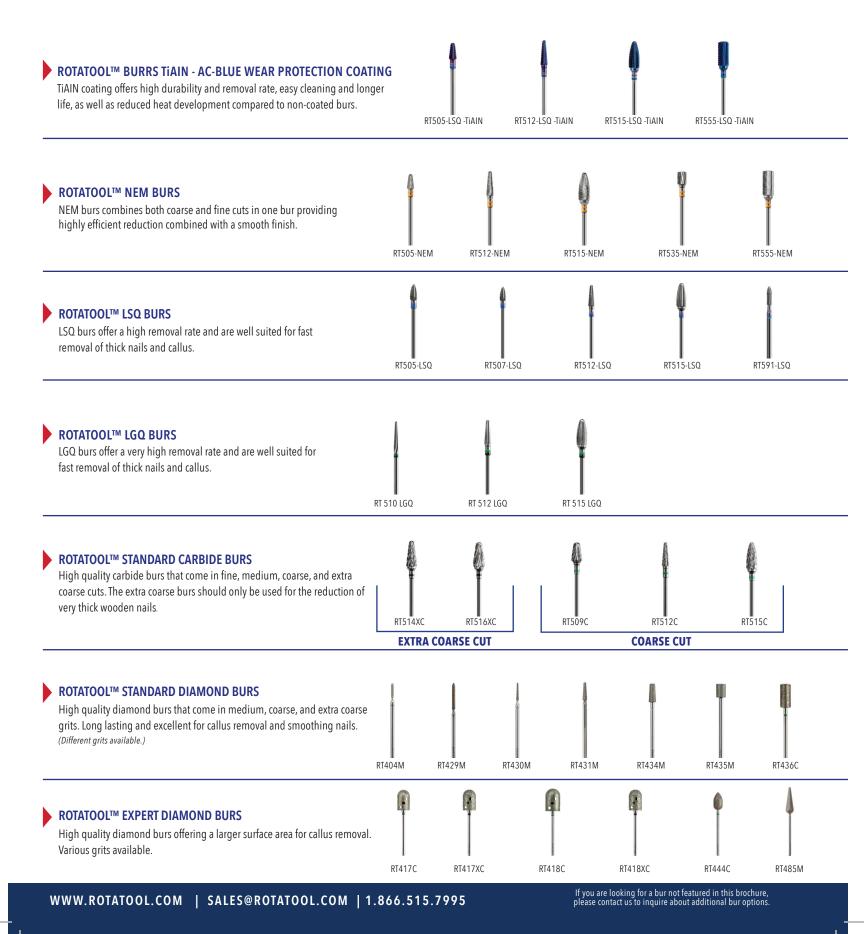



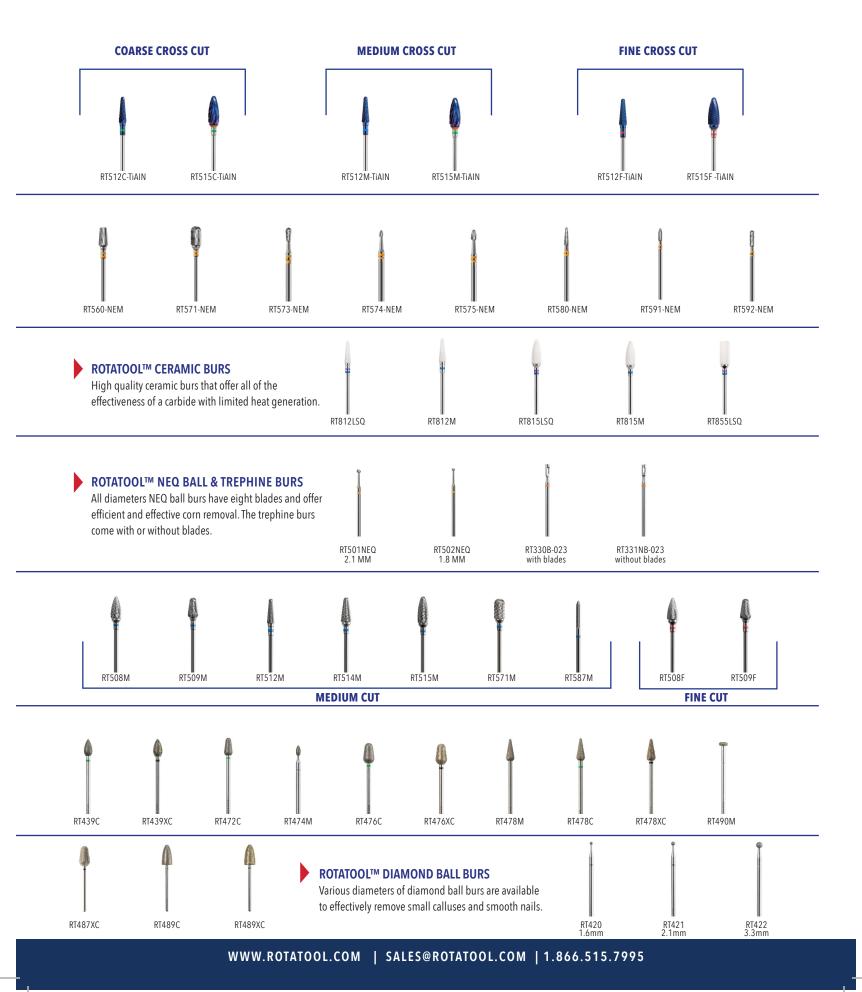

PACK IT U PYOU'RE READY TO GO CASES & SOLUTIONS TO TAKE YOUR PRACTICE ON THE ROAD



RT-H0656 Clever Carry Case

Thermoplastic housing made out of ABS (Acrylonitrile butadiene styrene) polymer, which is impact resistant, easy-to-clean & resistant against most disinfection fluids. The two drawers can be removed from the case to keep them closer to your work operation. The carrying case features sturdy rollers and an extendable, telescopic arm.



RT-H0909 Black Case

The Hadewe carrying cases are suitable for all current Hadewe units and feature doors that open sideways for optimal space. You can comfortably work from "out of the case" since the doors open sideways. Features reinforced wheels, an extractable telescopic carrying handle, an easy-to-clean synthetic leather surface inside, and a very handy document folder in the lid. The podiatry drills in all Hadewe cases are secured with hook and loop straps.

Foot Rest RT-H6559 (Regular) & RT-H6819 (Short)

This foot rest is perfect for use during in-home foot care sessions. The foot rest allows you to place the client's foot in a comfortable position to perform foot care. This model has been improved to give it more stability and to withstand additional weight. Offers six locking height adjustments and the angle of the rest is also adjustable. The foot rest is portable and collapses down to be stored in a convenient carry case.

Regular: Weight 1.081kg. Height ranges from 50cm - 63cm **Short:** Weight 1.0 kg. Height ranges from 33cm - 46m



reLEGx Foot Rest RT-H6722/3

Thanks to the combination of aluminum and stainless steel, the footrest weighs just 1.1 kg. The angle of inclination of the cushion can be variably adjusted. The height adjustment locks firmly in place so that the support cushion does not sink even under heavy loads. All joints are made of metal and are extremely resistant. The foot rest comes with a carry bag. The cushion is easy to care for and resistant to disinfectants. Available in White or Grey. Weight: 1.1 kg. Height: 52 to 62 cm.



Foot Rest RT-H0912

The foot rest is perfect for use during home visits, and assists you in putting the patient's foot where you can best work on it. Light weight of 1.1 kg (2.42 lbs). Height (between 46-67 cm / 12-26 inches) and multiple angles are separately adjustable. The joints are extra steel reinforced to prevent breaking under weight.



Tool Tray RT-H0219

This hard plastic tray allows you to keep all your tools and instruments within reach. You can hang it on the foot rest and it can be turned 360° in all directions. Includes 2 tool trays and 1 holder. Size: W 260 x H 75 x D 360, Weight: 400 g (W $10^{1/4''}$ x H 3'' x D 14'', Weight: 14 oz)



RT-H3670 Flex Catch Basin

New flexible catch basin. Consisting of a disinfectable elastic material. Provides a soft basis to put your patient's leg on, and can easily be pressed down, when working on the heel. Size: W 330 x H 100 x D510, Weight 580 g (W 13" x H 4" x D 22 ^{3/4}", Weight: 1.28 lbs)

ABRASIVE CAPS Effective & Efficient!

PODO

S	SK PODO, round Ø5mm					
Image Part Product			Description	Grit		
		RT341PD-C100	XS-C Podo Cap 05080 - 100/Pack	Coarse		
	RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT341PD-M100	XS-M Podo Cap 05150 - 100/Pack	Medium		

SK PODO, round Ø7mm

Image	Part Product	Description	Grit
	RT342PD-C100	S-C Podo Cap 07080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT342PD-M100	S-M Podo Cap 07150 - 100/Pack	Medium

SK PODO, round Ø10mm

Image	Part Product	Description	Grit
	RT343PD-C100	M-C Podo Cap 00080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT343PD-M100	M-M Podo Cap 10150 - 100/Pack	Medium

SK PODO, round Ø13mm

	Image	Part Product	Description	Grit
		RT344PD-C50	L-C Podo Cap 13080 - 50/Pack	Coarse
	and the second second	RT344PD-M50	L-M Podo Cap 13150 - 50/Pack	Medium
	RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT344PD-C100	L-C Podo Cap 13080 - 100/Pack	Coarse
		RT344PD-M100	L-M Podo Cap 13150 - 100/Pack	Medium

SK PODO, round Ø13mm

Image	Part Product	Description	Grit
and the second	RT345PD-C50	XL-C Podo Cap 16080 - 50/Pack	Coarse
	RT345PD-M50	XL-M Podo Cap 16150 - 50/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT345PD-C100	XL-C Podo Cap 16080 - 100/Pack	Coarse
(wax ki w. 11,000)	RT345PD-M100	XL-M Podo Cap 16150 - 100/Pack	Medium

THERMO

SK THERMO, round Ø5mm				
Image	Part Product	Description	Grit	
	RT341TH-C100	XS-C Thermo Cap 05080 - 100/Pack	Coarse	
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT341TH-M100	XS-M Thermo Cap 05150 - 100/Pack	Medium	

SK PODO, round Ø7mm

Image	Part Product	Description	Grit
	RT342TH-C100	S-C Thermo Cap 07080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT342TH-M100	S-M Thermo Cap 07150 - 100/Pack	Medium

SK PODO, round Ø10mm

Im	age	Part Product	Description	Grit
		RT343TH-C100	M-C Thermo Cap 00080 - 100/Pack	Coarse
	0 - 10,000 1: 11,000)	RT343TH-M100	M-M Thermo Cap 10150 - 100/Pack	Medium

SK PODO, round Ø13mm

Image	Part Product	Description	Grit
	RT344TH-C50	L-C Thermo Cap 13080 - 50/Pack	Coarse
	RT344TH-M50	L-M Thermo Cap 13150 - 50/Pack	Medium
	RT344TH-C100	L-C Thermo Cap 13080 - 100/Pack	Coarse
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT344TH-M100	L-M Thermo Cap 13150 - 100/Pack	Medium

SK PODO, round Ø13mm

Image	Part Product	Description	Grit
	RT345TH-C50	XL-C Thermo Cap 16080 - 50/Pack	Coarse
Carlos and	RT345TH-M50	XL-M Thermo Cap 16150 - 50/Pack	Medium
RPM: 7,000 - 10,000 (Max RPM: 11,000)	RT345TH-C100	XL-C Thermo Cap 16080 - 100/Pack	Coarse
	RT345TH-M100	XL-M Thermo Cap 16150 - 100/Pack	Medium


HOLDERS

Precise - Exact Fit - Safe

The LUKAS abrasive cap holders provide a precise fit to both PODO and THERMO abrasive caps and ensure high safety in foot care. During the treatment, the cap is held firmly in place on the holder. After use, caps can be quickly exchanged.

All LUKAS cap holders feature a stainless steel shaft.

Image	Part Product	Description	Recommended Speed / RPM
	RT341-3/32	GT PODO 5 mm round XS	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT342-3/32	GT PODO 7 mm round S	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT343-3/32	GT PODO 10 mm round M	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT344-3/32	GT PODO 13 mm round	RPM: 7,000 - 10,000 (Max RPM: 11,000)
	RT345-3/32	GT PODO 16 mm round XL	RPM: 7,000 - 10,000 (Max RPM: 11,000)



The world's first innovative colour change technology!



FOOT CAR INNOVATIONS

- High Quality Instruments
- Precision Tools
- Professional Grade Accessories

