



BUILT FOR YOUR COMFORT

Catalogue 2023

Rest Assured



THE INVENTOR

In 1902, Willis Carrier solved one of mankind's most elusive challenges by controlling the indoor environment through modern air conditioning.

His invention enabled countless industries, promoting global productivity, health, and personal comfort.

For more than a century, our research, expertise, and forethought have resulted in market-leading innovations.

Carrier has been present in India since 1986.

It was established to fulfil the growing demand of room air conditioners. Carrier Midea India has a manufacturing facility in Supa, Maharashtra which strives to bring state-of-the-art technology that has been localised for the Indian consumer.



INDIA'S OWN. INDIA'S FAVOURITE.

Since 2012, Carrier has won the hearts of our customers through advanced product solutions with global technology built in India. Our manufacturing facility, located in Maharashtra, is responsible for creating the world-class quality products that our patrons love and trust, all while utilising state-of-the-art energy-saving technological practices. We continuously strive to keep our products up-to-date, staying ahead of the curve in today's ever-changing tech landscape. Our main objective is to bring next-gen technology to every Indian household.



AT CARRIER, WE SAY:

Rest
Assured

We believe that with Carrier,
you don't have to worry about
anything. We are confident that we
deliver exceptional quality products
and the finest of services with them,
and that is why you can trust us.
From the moment you have a Carrier
product installed in your home,
through time that product becomes
a reliable feature in your household.

This is why our motto is
"Rest Assured".



CHANGE CAPACITY* AS PER YOUR COOLING NEEDS/WEATHER



6-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY

We believe that technology must adapt to human requirements and not the other way around. That's why Carrier ACs come with Flexicool technology. It means that apart from adjusting the AC's cooling performance you can also change the energy consumption of the AC as per your requirement.

HERE ARE 6 COOLING CAPACITY ADJUSTMENTS



Disclaimer: The product shown here is INDUS Dxi 18K-5i model.



HYBRIDJET

The revolutionary HYBRIDJET technology in Carrier ACs not only keeps you cool, but itself too. Using a combination of air and low-temperature refrigerant, Carrier HYBRIDJET ACs keep their outdoor E-box cooler, no matter how hot it gets outside. When other ACs can't function properly over temperatures of 50°C, Carrier HYBRIDJET AC keeps on functioning efficiently even at a temperature of 55°C.



**HIGH AMBIENT
WORKING**



**DURABLE INVERTER
OUTDOOR PCB**



**LOW VOLTAGE
OPERATION**



**STABILIZER-FREE
OPERATION**

Disclaimer: Also available in HYBRIDJET ALPHA variant, now.



SMART ENERGY DISPLAY

Keeping you up-to-date on your usage, Carrier ACs come with a Kilowatt display that shows you how much power your AC is consuming in real time.

Just like your car keeps on updating you of its mileage, a Carrier AC comes with a Kilowatt display panel, that keeps on showing the Kilowatts your AC is consuming.



CARRIER SMART CONNECT

A dynamic and proactive approach for enhanced equipment and system management, Carrier Smart Connect enables greater connectivity between the air conditioner, our service support team, and you. Equipped with WiFi connectivity, it is compatible with your Google Home and Alexa Home devices. You can also know the real-time status of the AC by connecting with customer care, using the app, if any error occurs.



HOW TO REGISTER A COMPLAINT ON CARRIER SMART CONNECT IN CASE OF AN ERROR:

STEP 1



Register your AC on the Carrier Wi-Fi-CMI app.

STEP 2



Tap on 'Me' and tap on 'Contact Us'.

STEP 3




Tap On 'Click Here To Register Complaint'.

STEP 4



Fill in the details of your complaint and send them.

NOTIFICATION

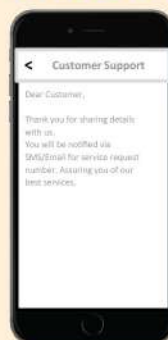

You will get a notification on the status of your complaint.



Scan the below QR code to download the Carrier WiFi app



Android



iOS

EXPLORE THE 2023 RANGE OF CARRIER ACs





INVERTER ACs

Experience a stunning cooling experience that saves on energy.





INDIA DESIGN MARK
GOOD DESIGN
awarded in 2021



Indus DXi Smart
4 & 5 Star Inverter Series
Available Variants : 1 TR, 1.5 TR & 2 TR

DESIGNED IN INDIA.
MADE IN INDIA.



ADDITIONAL FEATURES

6-IN-1 FLEXICOOL
WiFi
6 modes, up to 50% energy saving.

0.8 kW SMART ENERGY DISPLAY
Shows real power consumption.

AVG ANTI-VIRAL GUARD*
Protects against air borne viruses, bacteria, and germs.

CARRIER SMART CONNECT
WiFi enabled / Voice Controlled via Alexa and Google.

HYBRID JET TECHNOLOGY*
Works in high temperature up to 55°C.
*Patented technology

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

INSTA COOL
Instant cooling with a single click.

Scan the QR code to download the Carrier WiFi app.

- HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- AUTO RESTART**
- 100% COPPER**
- REFRIGERANT LEAKAGE DETECTOR**
- HIGH AIR FLOW CFM - 700***
- BACKLIT REMOTE**
- AUTO ON / OFF TIMER**
- AUTO SWING**
- STABILIZER FREE EVEN AT 48 DEG***
- HYDRO CORROSION COATING (BLUE)**
- FOLLOW ME**



	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500 / 1750	5280 / 2640	6000 / 3000	6200 / 3100
	Power Input - Full / Half (W)	840 / 334	1310 / 480	1500 / 555	1695 / 643
	Annual Power Consumption (kWh)	536.2	799.71	920.55	1054.45
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.11	5.05	4.55
Comfort & Convenience	Air Flow (CFM)	380	685	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	32.4x96.5x23.4	32x104.6x24	32x104.6x24
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



Carrier/01/23



INDIA DESIGN MARK
GOOD DESIGN
awarded in 2021



Indus Dxi
3 Star Inverter Series
Available Variants : 1 TR, 1.5 TR & 2 TR

**DESIGNED IN INDIA.
MADE IN INDIA.**

4-in-1
FlexiCool
Remote



FLEXI COOL
HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

4-IN-1 AC WITH FLEXI COOL HYBRIDJET TECHNOLOGY*
4 modes, up to 50% energy saving.

ANTI-VIRAL GUARD*
Protects against air borne viruses, bacteria and germs.



HIDDEN DISPLAY



AIR DIRECTIONAL CONTROL

HYBRID JET TECHNOLOGY*
Works in high temperature up to 55°C.
*Patented technology

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.



HIGH AIR FLOW CFM - 700*



BACKLIT REMOTE

INTELLIGENT CRF ALERT
Notifies you to clean filters.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.



AUTO ON / OFF TIMER



DOUBLE DRAIN

AUTO CLEANSER
Disinfects and cleans the indoor unit.

FOLLOW ME
Quicker and targeted cooling around remote.



STABILIZER FREE EVEN AT 48 DEG*



AUTO SWING



DRY MODE



HYDRO CORROSION COATING (BLUE)



CA112IN3R32FO



CA118IN3R32FO



CA124IN3R32FO

	Tonnage Category	1.0 TR	1.5 TR	2.0 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	5200/2600	6300/3150
	Power Input - Full / Half (W)	1055/455	1660/645	2000/765
	Annual Power Consumption (kWh)	704.46	1046.3	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.88	3.85	3.9
Comfort & Convenience	Air Flow (CFM)	400	685	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/39
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	28.2x79.8x19.2	32.4x96.5x23.4	32x104.6x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.





EMPERIA DXi Wifi
5 Star Inverter Series
 Available Variants : 1 TR, 1.5 TR & 2 TR

DESIGNED IN INDIA.
MADE IN INDIA.

6-in-1 FlexiCool Remote



FLEXICOOL
 HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

6-IN-1 FLEXICOOL WIFI
 6 modes, up to 50% energy saving.

PM 2.5 FILTER
 Gives cleaner and pure air.

REFRIGERANT LEAKAGE DETECTOR
 Smart system detects and safeguards the AC.

CARRIER SMART CONNECT
 Wifi enabled / Voice Controlled via Alexa and Google.

HYBRID JET TECHNOLOGY*
 Works in high temperature up to 55°C.
 * Patented Technology

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

INSTA COOL
 Instant cooling with a single click.

Scan the QR code to download the Carrier WiFi app.

- HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- AUTO CLEANER**
- 100% COPPER**
- FOLLOW ME**
- HIGH AIR FLOW CFM - 700***
- BACKLIT REMOTE**
- AUTO ON / OFF TIMER**
- AUTO SWING**
- STABILIZER FREE EVEN AT 48 DEG***
- AQUA CLEAR PROTECTION**
- DOUBLE DRAIN**



	Tonnage Category	1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3550 / 1775	3500 / 1750	5000 / 2500	6000 / 3000
	Power Input - Full / Half (W)	860 / 337	840 / 334	1260 / 445	1500 / 555
	Annual Power Consumption (kWh)	544.58	536.2	754.05	920.55
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.05	5.05	5.13	5.05
Comfort & Convenience	Air Flow (CFM)	380	380	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	44/42/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333



Carrier/01_23



EMPERIA DXi Wifi 4 Star Inverter Series

Available Variants : 2 TR

**DESIGNED IN INDIA.
MADE IN INDIA.**



ADDITIONAL FEATURES

6-IN-1 AC WITH FLEXICOOL
6 modes, up to 50% energy saving.

PM 2.5 FILTER
Gives cleaner and pure air.

HIDDEN DISPLAY

AIR DIRECTIONAL CONTROL

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

CARRIER SMART CONNECT
WiFi enabled / Voice Controlled via Alexa and Google.

AUTO CLEANER

100% COPPER

HYBRID JET TECHNOLOGY*
Works in high temperature up to 55°C.
* Patented technology

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

FOLLOW ME

HIGH AIR FLOW CFM - 700*

BACKLIT REMOTE

AUTO ON / OFF TIMER

INSTA COOL
Instant cooling with a single click.

Scan the QR code to download the Carrier WiFi app.

AUTO SWING

STABILIZER FREE EVEN AT 48 DEG*

AQUA CLEAR PROTECTION

DOUBLE DRAIN



CAI24EN4R32W0

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6200 / 3100
	Power Input - Full / Half (W)	1695 / 643
	Annual Power Consumption (kWh)	1054.45
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4.55
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Mean for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





EMPERIA DXi
3 Star Inverter Series
 Available Variants : 1 TR, 1.5 TR & 2 TR

DESIGNED IN INDIA.
MADE IN INDIA.

4-in-1
 FlexiCool
 Remote



FLEXI COOL
 HYBRIDJET TECHNOLOGY



ADDITIONAL FEATURES

4-IN-1 FLEXI COOL WITH HYBRIDJET TECHNOLOGY*
 4 modes, up to 50% energy saving.

PM 2.5 FILTER
 Gives cleaner and pure air.

REFRIGERANT LEAKAGE DETECTOR
 Smart system detects and safeguards the AC.

TURBO MODE
 Brings down the temperature rapidly.

HYBRID JET TECHNOLOGY*
 Works in high temperature up to 55°C.
 * Patented technology

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

FOLLOW ME
 Quicker and targeted cooling around remote.

AUTO CLEANSER
 Disinfects and cleans the indoor unit.

24°C HIDDEN DISPLAY

AIR DIRECTIONAL CONTROL

AUTO RESTART

100% COPPER

DOUBLE DRAIN

HIGH AIR FLOW CFM - 700*

BACKLIT REMOTE

2s AUTO ON / OFF TIMER

AUTO SWING

STABILIZER FREE EVEN AT 48 DEG*

AQUA CLEAR PROTECTION

DRY MODE



CA112EN3R32FO



CA112EN3R33FO



CA118EN3R32FO



CA124EN3R32FO

Tonnage Category		1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500 / 1750	3530 / 1765	5050 / 2525	6300 / 3150
	Power Input - Full / Half (W)	1055 / 455	1055 / 455	1590 / 615	2000 / 765
	Annual Power Consumption (kWh)	704.46	704.46	999.69	1249.82
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.85	3.88	3.91	3.9
Comfort & Convenience	Air Flow (CFM)	375	375	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	42/40/37	46/44/39
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	275x80x18.8	275x94x20.5	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

Carrier/01-23

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





EMPERIA LXi 4 & 5 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES

6-IN-1 FLEXICOOL WITH FLEXICOOL
6 modes, up to 50% energy saving.

PM 2.5 FILTER
Gives cleaner and pure air.

HIDDEN DISPLAY

AIR DIRECTIONAL CONTROL

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

HYBRID JET ALPHA TECHNOLOGY*
Works in high temperature up to 55°C.

HIGH AIR FLOW CFM - 700*

DRY MODE

AUTO ON / OFF TIMER

BACKLIT REMOTE

HYDRO BLUE COATING*
Protects coil & fin against corrosion and increases durability.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

STABILIZER FREE EVEN AT 48 DEG*

DOUBLE DRAIN

FOLLOW ME
Quicker and targeted cooling around remote.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

AQUA CLEAR PROTECTION

AUTO SWING



CAI2EL5R33FO



CAI1BEL5R32FO



CAI24EL5R32FO



CAI24EL4R33FO

Tonnage Category		1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000	6200/3100
	Power Input - Full / Half (W)	840/334	1260/445	1500/555	1695/643
	Annual Power Consumption (kWh)	536.2	754.05	920.55	1054.45
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	5.05	5.13	5.05	4.55
Comfort & Convenience	Air Flow (CFM)	380	580	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38	46/44/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	275x94x20.5	315x104.5x23.5	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





EMPERIA LXi

3 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR

4-in-1 FlexiCool Remote **FLEXICOOL** INVERTER TECHNOLOGY

4-in-1 AC FLEXICOOL WITH INVERTER TECHNOLOGY
4 modes, up to 50% energy saving.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

TURBO MODE
Brings down the temperature rapidly.

PM 2.5 FILTER
Gives cleaner and pure air.

HYBRID JET ALPHA TECHNOLOGY*
Works in high temperature up to 55°C.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

ADDITIONAL FEATURES

- 24°C HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- HIGH AIR FLOW CFM - 700***
- FOLLOW ME**
- AUTO ON / OFF TIMER**
- BACKLIT REMOTE**
- STABILIZER FREE EVEN AT 48 DEG***
- DOUBLE DRAIN**
- AQUA CLEAR PROTECTION**
- AUTO SWING**
- 100% COPPER**
- DRY MODE**

CAI12EL3R32FO **CAI12EL3R33FO** **CAI18EL3R32FO** **CAI24EL3R32FO**

	Tonnage Category	1 TR	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity- Full / Half (W)	3500/1750	3530/1765	5050/2525	6300/3150
	Power Input- Full / Half (W)	1055/455	1055/455	1590/615	2000/765
	Annual Power Consumption (kWh)	704.46	704.46	999.69	1249.82
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.85	3.88	3.91	3.9
Comfort & Convenience	Air Flow (CFM)	375	375	580	700
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	42/40/37	46/44/39
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code /	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	3/8" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/01-23



SUPERIA XTREME 5 Star Inverter Series

Available Variants : 2 TR



ADDITIONAL FEATURES

6-in-1 AC FLEXI COOL WITH HYBRID JET TECHNOLOGY*

6 modes, up to 50% energy saving.

0.8kW SMART ENERGY DISPLAY

Shows real power consumption.

HYBRID JET TECHNOLOGY*

Works in high temperature up to 55°C.
* Patented technology

FOLLOW ME

Quicker and targeted cooling around remote.

INSTA COOL

Instant cooling with a single click.

INTELLIGENT CRF ALERT

Notifies you to clean filters.

REFRIGERANT LEAKAGE DETECTOR

Smart system detects and safeguards the AC.

Scan the QR code to download the Carrier WiFi app.

- 24°C HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- AUTO CLEANER**
- BACKLIT REMOTE**
- HIGH AIR FLOW CFM - 860**
- DOUBLE DRAIN**
- 2s AUTO ON / OFF TIMER**
- AUTO SWING**
- STABILIZER FREE EVEN AT 48 DEG***
- 100% COPPER**
- AQUA CLEAR PROTECTION**
- DRY MODE**



CAI24SX5R32W0

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6580 / 3290
	Power Input - Full / Half (W)	1676 / 595
	Annual Power Consumption (kWh)	1005.81
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	5.06
Comfort & Convenience	Air Flow (CFM)	860
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	33.5x108x22.6
	Outdoor (HxWxD-with Grill) in cm	70x84.5x32
Valve Size	Inch	5/8" x 1/4"

Carrier/01-23

*TAC Apply. 860 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.





DURAWHITE DXi 5 Star Inverter Series

Available Variants : 1 TR, 1.5 TR & 2 TR

6-in-1 FlexiCool Remote **FLEXICOOL**
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

6-IN-1 AC WITH FLEXICOOL
6 modes, up to 50% energy saving.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.



LED 7 SEGMENT DISPLAY



AIR DIRECTIONAL CONTROL

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

INTELLIGENT CRF ALERT
Notifies you to clean filters.



HIGH AIR FLOW CFM - 700*



BACKLIT REMOTE

HIGH AMBIENT WORKING
Works in high temperature up to 52°C.

PM 2.5 FILTER
Gives cleaner and pure air.



AUTO ON / OFF TIMER



DOUBLE DRAIN

AUTO CLEANSER
Disinfects and cleans the indoor unit.

FOLLOW ME
Quicker and targeted cooling around remote.



STABILIZER FREE EVEN AT 48 DEG*



AUTO SWING



AQUA CLEAR PROTECTION



100% COPPER



	Tonnage Category	1 TR	1.5 TR	2 TR
Performance	Cooling Capacity - Full / Half (W)	3500/1750	5000/2500	6000/3000
	Power Input - Full / Half (W)	840/334	1260/445	1500/555
	Annual Power Consumption (kWh)	536.2	754.05	920.55
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	5.05	5.13	5.05
Comfort & Convenience	Air Flow (CFM)	380	580	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/38
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code /)	Yes, LED Display	Yes, LED Display	Yes, LED Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	27.5x94x20.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/0123



DURAWHITE DXi 4 Star Inverter Series

Available Variants : 2 TR

6-in-1
FlexiCool
Remote



FLEXICOOL
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

6-IN-1 FLEXICOOL WITH
6 modes, up to 50% energy saving.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

HIGH AMBIENT WORKING
Works in high temperature up to 52°C.

PM 2.5 FILTER
Gives cleaner and pure air.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

FOLLOW ME
Quicker and targeted cooling around remote.



LED 7 SEGMENT DISPLAY



AIR DIRECTIONAL CONTROL



HIGH AIR FLOW CFM - 700*



BACKLIT REMOTE



AUTO ON / OFF TIMER



DOUBLE DRAIN



STABILIZER FREE EVEN AT 48 DEG*



AUTO SWING



AQUA CLEAR PROTECTION



100% COPPER



CAI24DH4R33FO

Tonnage Category		2 TR
Performance	Cooling Capacity - Full / Half (W)	6200/3100
	Power Input - Full / Half (W)	1695/643
	Annual Power Consumption (kWh)	1054.45
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	4.55
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/38
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code /	Yes, LED Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Mean for reference purpose. This is not an advertisement.



Carrier/0523



DURAWHITE DXi 3 Star Inverter Series

Available Variants : 2 TR

4-in-1 FlexiCool Remote **FLEXICOOL**
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

4-IN-1 AC WITH FLEXICOOL
4 modes, up to 50% energy saving.

PM 2.5 FILTER
Gives cleaner and pure air.

LED 7 SEGMENT DISPLAY

AIR DIRECTIONAL CONTROL

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

TURBO MODE
Brings down the temperature rapidly.

BACKLIT REMOTE

100% COPPER

AUTO CLEANSER
Disinfects and cleans the indoor unit.

HYDRO BLUE COATING*
Protects coil & fin against corrosion and increases durability.

AUTO SWING

INTELLIGENT CRF ALERT

HIGH AIR FLOW CFM - 700*

AUTO ON / OFF TIMER

FOLLOW ME
Quicker and targeted cooling around remote.

PM 2.5 FILTER
Gives cleaner and pure air.

AQUA CLEAR PROTECTION

STABILIZER FREE EVEN AT 48 DEG*



CAI24DH3R32FO

	Tonnage Category	2 TR
Performance	Cooling Capacity - Full / Half (W)	6300/3150
	Power Input - Full / Half (W)	2000/765
	Annual Power Consumption (kWh)	1249.82
	Label Period	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.9
Comfort & Convenience	Air Flow (CFM)	700
	IDU Noise (H/M/L) in db	46/44/39
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code /	Yes, LED Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x79x28
Valve Size	Inch	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/0123



DURAWHITE PRO+ RXI 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR

4-in-1 FlexiCool Remote **FLEXICOOL**
INVERTER TECHNOLOGY

ADDITIONAL FEATURES

- 4-in-1 AC WITH FLEXICOOL**
4 modes, up to 50% energy saving.
- INTELLIGENT CRF ALERT**
Notifies you to clean filters.
- REFRIGERANT LEAKAGE DETECTOR**
Smart system detects and safeguards the AC.
- HYDRO BLUE COATING***
Protects coil and fin against corrosion and increases durability.
- AUTO CLEANSER**
Disinfects and cleans the indoor unit.
- PM 2.5 FILTER**
Gives cleaner and pure air.
- FOLLOW ME**
Quicker and targeted cooling around remote.
- HIGH AIR FLOW CFM - 450**
For 1.5 TR

- HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- DRY MODE**
- BACKLIT REMOTE**
- AUTO ON / OFF TIMER**
- DOUBLE DRAIN**
- STABILIZER FREE EVEN AT 48 DEG***
- AUTO SWING**
- AQUA CLEAR PROTECTION**
- 100% COPPER**



	Tonnage Category	1 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.88	3.85
Comfort & Convenience	Air Flow (CFM)	400	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code /)	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	SED) Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/01-23



OCTRA RXI 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR

4-in-1 FlexiCool Remote **FLEXICOOL**
INVERTER TECHNOLOGY

ADDITIONAL FEATURES ATURES

4-IN-1 FLEXICOOL WITH INVERTER TECHNOLOGY
4 modes, up to 50% energy saving.

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

TURBO MODE
Brings down the temperature rapidly.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

FOLLOW ME
Quicker and targeted cooling around remote.

AIR DIRECTIONAL CONTROL

HIDDEN DISPLAY

DRY MODE

HIGH AIR FLOW CFM - 450

BACKLIT REMOTE

AUTO ON / OFF TIMER

DOUBLE DRAIN

STABILIZER FREE EVEN AT 48 DEG*

AUTO SWING

AQUA CLEAR PROTECTION

100% COPPER

CAI12OC3R33FO **CAI18OC3R33FO** **CAI18OC3R33FO**
with optional 4 way swing

	Tonnage Category	1 TR	1.5 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580	1575/580
	Annual Power Consumption (kWh)	704.46	964.1	964.1
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 -31 st Dec,2024	1 st July,2022 -31 st Dec,2024
	ISEER Value (W/W)	3.88	3.85	3.85
Comfort & Convenience	Air Flow (CFM)	400	450	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/01-23



KURVE RXi 3 Star Inverter Series

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES FEATURES

4-IN-1 FLEXICOOL WITH
4 modes, up to 50% energy saving.

INTELLIGENT CRF ALERT
Notifies you to clean filters.

PM 2.5 FILTER
Gives cleaner and pure air.

TURBO MODE
Brings down the temperature rapidly.

REFRIGERANT LEAKAGE DETECTOR
Smart system detects and safeguards the AC.

AUTO CLEANSER
Disinfects and cleans the indoor unit.

FOLLOW ME
Quicker and targeted cooling around remote.

AIR DIRECTIONAL CONTROL



	Tonnage Category	1 TR	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	3530/1765	4800/2400
	Power Input - Full / Half (W)	1055/455	1575/580
	Annual Power Consumption (kWh)	704.46	964.1
	Label Period	1 st July,2022 - 31 st Dec,2024	1 st July,2022 - 31 st Dec,2024
	ISEER Value (W/W)	3.88	3.85
Comfort & Convenience	Air Flow (CFM)	400	450
	IDU Noise (H/M/L) in db	40/38/32	40/38/32
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	27x85x22
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28
Valve Size	Inch	3/8" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.





NOVELLO 365
3 Star HOT & COLD AC
 Available Variants : 1.5 TR



ADDITIONAL FEATURES

TURBO MODE
 Brings down the temperature rapidly.

HYDRO BLUE COATING*
 Protects fin against corrosion and increases durability.

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.

ANTIMICROBIAL FILTER

HIGH AIRTHROW 630 CFM

HEATING & COOLING

SLEEP MODE
 Automatically switches off the unit after 7 hours.

HD FILTER

HIDDEN DISPLAY

AIR DIRECTIONAL CONTROL

AUTO SWING

SLEEP MODE

DOUBLE DRAIN

DRY MODE

LOUVER POSITION MEMORY

AUTO ON / OFF TIMER

STABILIZER FREE EVEN AT 48 DEG*

AQUA CLEAR PROTECTION



CAI18NO3R32HO

	Tonnage Category	1.5 TR
Performance	Cooling/Heating Capacity - Full/Half (W)	5300 / 2650
	Cooling/Heating Power Input - Full/Half (W)	1583 / 580
	Annual Power Consumption (kWh)	966.34
	Label Period	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	4.25
Comfort & Convenience	Air Flow (CFM)	630
	IDU Noise (H/M/L) in db	49/46/43
	Fan motor (no. of speeds)	4
	IDU Display (Temp / ER Code)	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA
	HD Filter	Yes
Dimensions	Indoor (HxWxD) in cm	29.5x100x23
	Outdoor (HxWxD-with Grill) in cm	59.4x81x30
Valve Size	Inch	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/01/23



FIXED SPEED ACs

Built to cool for long, while lasting longer.





Indus DX
2 & 3 Star Fixed Speed
 Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.

ANTI-VIRAL GUARD*
 Protects against air borne viruses, bacteria and germs.

HIDDEN DISPLAY

AIR DIRECTIONAL CONTROL

REFRIGERANT LEAKAGE DETECTOR
 Smart system detects and safeguards the AC.

TURBO MODE
 Brings down the temperature rapidly.

AUTO RESTART

100% COPPER

AUTO CLEANSER
 Disinfects and cleans the indoor unit.

FOLLOW ME
 Quicker and targeted cooling around remote.

BACKLIT REMOTE

HIGH AIR FLOW CFM - 700*

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

INTELLIGENT CRF ALERT
 Notifies you to clean filters.

AUTO SWING

AUTO ON / OFF TIMER

DOUBLE DRAIN

AQUA CLEAR PROTECTION



CAS12IN3R32F1



CAS18IN3R32F0



CAS24IN3R32F0



CAS24IN2R32F0

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5230	6050	6000
	Power Input (W)	940	1360	1570	1665
	Annual Power Consumption (kWh)	727.66	1052.79	1215.35	1288.89
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.83	3.85	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	400	700	700	700
	IDU Noise (H/M/L) in db	40/38/35	44/42/38	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	Yes	Yes	Yes	Yes
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27.5x80x18.8	32.4x96.5x22.8	31.5x104.5x23.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

*TBC Apply, 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary, For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/01-23



EMPERIA DX

2 & 3 Star Fixed Speed

Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES

- PM 2.5 FILTER**
Gives cleaner and pure air.
- HYDRO BLUE COATING***
Protects coil and fin against corrosion and increases durability.
- TURBO MODE**
Brings down the temperature rapidly.
- REFRIGERANT LEAKAGE DETECTOR**
Smart system detects and safeguards the AC.

- HIGH AMBIENT WORKING**
Works in high temperature up to 52°C.
- AUTO CLEANSER**
Disinfects and cleans the indoor unit.
- INTELLIGENT CRF ALERT**
Notifies you to clean filters.
- FOLLOW ME**
Quicker and targeted cooling around remote.

- 24°C HIDDEN DISPLAY**
- AIR DIRECTIONAL CONTROL**
- AUTO RESTART**
- 100% COPPER**
- DRY MODE**
- HIGH AIR FLOW CFM - 700***
- AUTO SWING**
- AUTO ON / OFF TIMER**
- AQUA CLEAR PROTECTION**
- DOUBLE DRAIN**



	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5200	6050	6000
	Power Input (W)	940	1350	1570	1665
	Annual Power Consumption (kWh)	72766	1045.04	1215.35	1288.89
	Label Period	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024	1 st July 2022 - 31 st Dec 2024
	ISEER Value (W/W)	3.83	3.85	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	400	700	700	700
	IDU Noise (H/M/L) in db	40/38/32	44/42/38	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	275x80x18.8	324x96.5x22.8	315x104.5x23.5	315x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/00-23



DURAWHITE DX
2 & 3 Star Fixed Speed
 Available Variants : 2 TR



ADDITIONAL FEATURES

<p>PM 2.5 FILTER Gives cleaner and pure air.</p>	<p>HIGH AMBIENT WORKING Works in high temperature up to 52°C.</p>
<p>AUTO CLEANSER Disinfects and cleans the indoor unit.</p>	<p>REFRIGERANT LEAKAGE DETECTOR Smart system detects and safeguards the AC.</p>
<p>HYDRO BLUE COATING* Protects coil and fin against corrosion and increases durability.</p>	<p>INTELLIGENT CRF ALERT Notifies you to clean filters.</p>
<p>FOLLOW ME Quicker and targeted cooling around remote.</p>	<p>TURBO MODE Brings down the temperature rapidly.</p>

	LED 7 SEGMENT DISPLAY		AIR DIRECTIONAL CONTROL
	HIGH AIR FLOW CFM - 700*		BACKLIT REMOTE
	AUTO ON / OFF TIMER		DOUBLE DRAIN
	AUTO RESTART		AUTO SWING
	AQUA CLEAR PROTECTION		100% COPPER



CAS24DH3R33FO



CAS24DH2R33FO

		CAS24DH3R33FO	CAS24DH2R33FO
	Tonnage Category	2 TR	2 TR
Performance	Cooling Capacity (W)	6050	6000
	Power Input (W)	1570	1665
	Annual Power Consumption (kWh)	1215.35	1288.89
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.85	3.6
Comfort & Convenience	Air Flow (CFM)	700	700
	IDU Noise (H/M/L) in db	46/44/40	46/44/40
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, LED Display	Yes, LED Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	31.5x104.5x23.5	31.5x104.5x23.5
	Outdoor (HxWxD-with Grill) in cm	70x84.5x33.5	70x84.5x33.5
Valve Size	Inch	5/8" x 1/4"	5/8" x 1/4"

*T&C Apply. 700 CFM only applicable on 2 TR model. Stabilizer free operation range : 135 - 280 V. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/0123



DURAWHITE PRO+ DX
2 & 3 Star Fixed Speed
 Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.

TURBO MODE
 Brings down the temperature rapidly.

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

HIGH AIR FLOW CFM - 700*
 For 1.5 TR

AIR DIRECTIONAL CONTROL



HIDDEN DISPLAY



100% COPPER



AUTO RESTART



AQUA CLEAR PROTECTION



AUTO SWING



AUTO ON / OFF TIMER



DOUBLE DRAIN



DRY MODE



CAS12DP3R32FI



CAS18DP3R32FO



CAS12DP2R33FO



CAS18DP2R33FO

	Tonnage Category	1 TR	1.5 TR	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200	3400	5000
	Power Input (W)	940	1350	958	1410
	Annual Power Consumption (kWh)	727.66	1045.04	741.59	1091.49
	Label Period	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024	1 st July, 2022-31 st Dec, 2024
	ISEER Value (W/W)	3.83	3.85	3.55	3.55
Comfort & Convenience	Air Flow (CFM)	400	700	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24	27x85x22	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





OCTRA DX
3 Star Fixed Speed
 Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.



AUTO ON / OFF
 TIMER



DOUBLE
 DRAIN

TURBO MODE
 Brings down the temperature rapidly.

**HIGH AIR FLOW
 CFM - 700***
 For 1.5 TR




AUTO
 RESTART



AUTO
 SWING

**AIR DIRECTIONAL
 CONTROL**

24h HIDDEN DISPLAY



AQUA CLEAR
 PROTECTION



100%
 COPPER



CAS12OC3R33FO



CAS18OC3R33FO



CAS18OC3R33FO
 with optional 4 way swing

	Tonnage Category	1 TR	1.5 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200	5200
	Power Input (W)	940	1350	1350
	Annual Power Consumption (kWh)	727.66	1045.04	1045.04
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.83	3.85	3.85
Comfort & Convenience	Air Flow (CFM)	400	700	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	44/42/38
	Fan motor (no. of speeds)	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA
	HD Filter	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmystore.com



Carrier Care: 1800 103 3333





OCTRA DX
2 Star Fixed Speed
 Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES

HYDRO BLUE COATING*
 Protects coil and fin against corrosion and increases durability.

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.



AUTO ON / OFF
 TIMER



DOUBLE
 DRAIN

TURBO MODE
 Brings down the temperature rapidly.

**HIGH AIR FLOW
 CFM - 700***
 For 1.5 TR



AUTO
 RESTART



AUTO
 SWING

**AIR DIRECTIONAL
 CONTROL**

24 HIDDEN DISPLAY



AQUA CLEAR
 PROTECTION



100%
 COPPER



CAS12OC2R33F0



CAS18OC2R33F0

	Tonnage Category	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3400	5000
	Power Input (W)	958	1410
	Annual Power Consumption (kWh)	741.59	1091.49
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.55	3.55
Comfort & Convenience	Air Flow (CFM)	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA
	HD Filter	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"

Carrier/01-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





KURVE DX

2 & 3 Star Fixed Speed

Available Variants : 1 TR & 1.5 TR



ADDITIONAL FEATURES

HYDRO BLUE COATING*
Protects coil and fin against corrosion and increases durability.

AIR DIRECTIONAL CONTROL

HIDDEN DISPLAY

HIGH AMBIENT WORKING
Works in high temperature up to 52°C.

HIGH AIR FLOW CFM - 700*
For 1.5 TR

TURBO MODE
Brings down the temperature rapidly.

- AUTO ON / OFF TIMER
- DOUBLE DRAIN
- AUTO RESTART
- AUTO SWING
- AQUA CLEAR PROTECTION
- 100% COPPER



	Tonnage Category	1 TR	1.5 TR	1 TR	1.5 TR
Performance	Cooling Capacity (W)	3600	5200	3400	5000
	Power Input (W)	940	1350	958	1410
	Annual Power Consumption (kWh)	727.66	1045.04	741.59	1091.49
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.83	3.85	3.55	3.55
Comfort & Convenience	Air Flow (CFM)	400	700	400	700
	IDU Noise (H/M/L) in db	39/35/32	44/42/38	39/35/32	44/42/38
	Fan motor (no. of speeds)	4	4	4	4
	IDU Display (Temp / ER Code / SED)	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display	Yes, Hidden Display
Air Purification & Filters	Anti - Viral Guard*	NA	NA	NA	NA
	HD Filter	Yes	Yes	Yes	Yes
Dimensions	Indoor (HxWxD) in cm	27x85x22	32x95x24	27x85x22	32x95x24
	Outdoor (HxWxD-with Grill) in cm	54x78x26.5	54x79x28	54x79x28	54x79x28
Valve Size	Inch	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"	1/2" x 1/4"

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.




Carrier/01-23

WINDOW ACs

State-of-the-art cooling that puts you at ease.



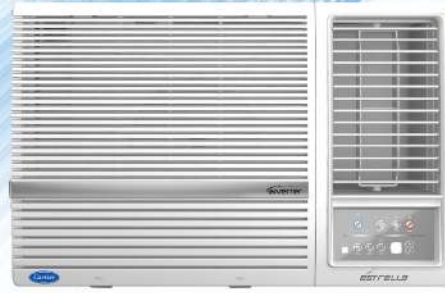

ESTRELLA DXi
5 Star Inverter Series
 Available Variants : 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.

HYDRO BLUE COATING*
 Protects fin against corrosion and increases durability.



TEMPERATURE DISPLAY



AIR DIRECTIONAL CONTROL

TURBO MODE
 Brings down the temperature rapidly.

ENERGY SAVER MODE
 Right temperature at low power bill.



AUTO RESTART



AUTO SWING

DUST FILTER
 High-efficient cooling and assured durability.

SLEEP MODE
 Automatically switches off the unit after 7 hours.



AQUA CLEAR PROTECTION



100% COPPER



CIW18EC5R32FO

	Tonnage Category	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5150/2575
	Power Input - Full / Half (W)	1640/730
	Annual Power Consumption (kWh)	1114.62
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.58
	Air Flow (CFM)	480
Comfort & Convenience	IDU Noise (H/M/L)	56/53/50
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x77

Carrier/101-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmistore.com



Carrier Care: 1800 103 3333





ESTRELLA DXi (E)
5 Star Inverter Series
 Available Variants : 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
 Works in high temperature up to 52°C.

HYDRO BLUE COATING*
 Protects fin against corrosion and increases durability.

TURBO MODE
 Brings down the temperature rapidly.

ENERGY SAVER MODE
 Right temperature at low power bill.

DUST FILTER
 High-efficient cooling and assured durability.

SLEEP MODE
 Automatically switches off the unit after 7 hours.

24°C TEMPERATURE DISPLAY AIR DIRECTIONAL CONTROL

AUTO RESTART AUTO SWING

AQUA CLEAR PROTECTION 100% COPPER



CIW18EC5R33F1

	Tonnage Category	1.5 TR
Performance	Cooling Capacity - Full / Half (W)	5070/2535
	Power Input - Full / Half (W)	1620/725
	Annual Power Consumption (kWh)	1104.37
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.55
	Air Flow (CFM)	450
Comfort & Convenience	IDU Noise (H/M/L)	56/53/50
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x70

Carrier/101-23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.





ESTRELLA DX
5 Star Fixed Speed
 Available Variants : 1.5 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
 Works in high temperature up to 50°C.

HYDRO BLUE COATING*
 Protects fin against corrosion and increases durability.

24°C TEMPERATURE DISPLAY

AUTO SWING

TURBO MODE
 Brings down the temperature rapidly.

ENERGY SAVER MODE
 Right temperature at low power bill.

AUTO RESTART

SLEEP MODE

DUST FILTER
 High-efficient cooling and assured durability.

AIR DIRECTIONAL CONTROL

AQUA CLEAR PROTECTION

100% COPPER



	Tonnage Category	1.5 TR
Performance	Cooling Capacity (W)	5050
	Power Input (W)	1400
	Annual Power Consumption (kWh)	1083.75
	Label Period	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.61
	Air Flow (CFM)	500
Comfort & Convenience	IDU Noise (H/M/L)	60/59/58
	Fan Motor (no. of speeds)	3
	IDU Display (Temp / ER Code)	Yes
Air Purification & Filters	Dust Filter	Yes
	Overall (HxWxD) in cm	43x66x77

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



Carrier/101-23



ESTRELLA DX 2 & 3 Star Fixed Speed

Available Variants : 1 TR, 1.5 TR & 2 TR



ADDITIONAL FEATURES

HIGH AMBIENT WORKING
Works in high temperature up to 50°C.

HYDRO BLUE COATING*
Protects fin against corrosion and increases durability.



TEMPERATURE DISPLAY



AUTO SWING

TURBO MODE
Brings down the temperature rapidly.

ENERGY SAVER MODE
Right temperature at low power bill.



AUTO RESTART



SLEEP MODE

DUST FILTER
High-efficient cooling and assured durability.

AIR DIRECTIONAL CONTROL



AQUA CLEAR PROTECTION



100% COPPER



CAW12EC3R32F0



CAW18EC3R32F0



CAW24EC3R32F0



CAW24EC2R32F0

	Tonnage Category	1 TR	1.5 TR	2 TR	2 TR
Performance	Cooling Capacity (W)	3600	5000	6000	6000
	Power Input (W)	1125	1558	1875	1942
	Annual Power Consumption (kWh)	870.87	1206.06	1451.45	1503.32
	Label Period	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024	1 st July,2022-31 st Dec,2024
	ISEER Value (W/W)	3.2	3.21	3.2	3.09
	Air Flow (CFM)	450	500	650	650
Comfort & Convenience	IDU Noise (H/M/L)	54/53/52	56/54/52	60/59/58	59/58/57
	Fan Motor (no. of speeds)	3	3	3	3
	IDU Display (Temp / ER Code)	Yes	Yes	Yes	Yes
Air Purification & Filters	Dust Filter	Yes	Yes	Yes	Yes
	Overall (HxWxD) in cm	43x66x70	43x66x70	43x66x77	43x66x77

Carrier/01/23

T&C Apply. Images shown are for reference only, actual product may vary. For private circulation only. Meant for reference purpose. This is not an advertisement.



www.carriermideaindia.com | www.cmiestore.com



Carrier Care: 1800 103 3333





CONTROL YOUR AC WITH THE CARRIER COOL CONNECT APP

You can now control your Carrier ACs on your phone with just a tap. The Cool Connect App allows you to get complete access to your air conditioner through the app itself. Everything from every detail of your product, services, e-store, product catalogues and videos, all in one place.

Scan the below QR code to
download the Carrier Wi-Fi app



REASONS TO BUY CARRIER ROOM AIR CONDITIONERS



6-IN-1 AC

WITH

FLEXICOOL
HYBRIDJET TECHNOLOGY



SMART ENERGY DISPLAY



ANTI-VIRAL GUARD*



CARRIER SMART CONNECT



INSTA KOOL



HIGH AMBIENT WORKING (AT 55° C)



HIDDEN DISPLAY



AUTO SWING




INTELLIGENT CRF ALERT




REFRIGERANT LEAKAGE DETECTOR



STABILIZER FREE EVEN AT 48 DEG*



HYDRO BLUE COATING*



AQUA CLEAR PROTECTION



AUTO CLEANSER



34 FEET AIR FLOW*



AIR DIRECTIONAL CONTROL



FOLLOW ME



MY MODE



100% COPPER



EQUIPPED WITH 5 SAFETY SENSORS



ERROR CODE INDICATOR



* Terms and Conditions apply. Product specifications, features, and offers are subject to change without prior notice.

** The features may vary depending upon the models.

* Complete 5 years warranty* worth ₹18,000* (1 year Standard warranty + 4 Year extended warranty) on the complete unit of Carrier Inverter Split Room Air Conditioners. Limited Period Offer.

** Comprehensive 5 years warranty* worth ₹10,000* (1 year Standard warranty + 4 Year extended warranty) on the complete unit of Carrier Fixed Speed Split Room Air Conditioners. Limited Period Offer.

For detailed terms and conditions & validity period, please visit www.carriermideaindia.com

Rest Assured



Media Arena



Ad center

Carrier Smart Air Conditioner | Flexicool ... Watch Later Share

I CARRY THE COOL

MORE VIDEOS

0:02 / 0:30 YouTube

Quick guides

FLEXI COOL REMOTE OPERATION

Carrier Flexicool 6-in-1 AC | Remote Guide | 2022

OPT. ECO MODE (Save Taxes) and (Save Power)

Carrier Flexicool 4-in-1 AC | Remote Guide | 2022

A D IVIDE TILL BACK TO SERVICE AGAIN

DIY Service Demo Video

Expert reviews

Best AC in India

Carrier Air Conditioner | Review by Vineet Malhotra (2022)

Carrier Air Conditioner | Review by Elementec (2022)

Beat The Heat With Carrier!

Carrier Air Conditioner | Review by Rajiv Makhani (2020)

Voice of the people

Carrier Air Conditioner Customer Testimonial (2022)

Carrier Air Conditioner Customer Testimonial (2022)

Carrier Air Conditioner Customer Testimonial (2022)





Corporate Office:

CARRIER MIDEA INDIA PRIVATE LIMITED

1st Floor, Pearl Tower, Plot No - 51, Sector - 32, Gurgaon, Haryana - 122001

Factory:

CARRIER MIDEA INDIA

Plot No. A-5, SUPA-PARNER Industrial Area, Ahmednagar, Maharashtra, 414301

CARRIER CARE - 1800 103 3333

Follow us on:



<https://www.facebook.com/CarrierMideaAc>



<https://www.instagram.com/carriermideaindia>



<https://www.twitter.com/CarrierMideaInd>

Disclaimer: As a continuing policy of product innovation at Carrier, the design and specifications are subject to change without prior notice.

The visuals of the products in the brochure are representative only, actual products might differ from the ones shown.

'Products mentioned in this brochure comply with RoHS regulations as per E-waste (Management & Handling) Rules, 2011 and should not be mixed with general household waste at the end of their useful life'. For more details kindly visit our website carriermideaindia.com or contact Carrier care: 1800 103 3333