



Asphalt & Prestressed Core Bits



C-43 Asphalt & Prestressed

14" Drilling Depth

Same high quality segments as used on the C32 and C52 bits, but with more segments per bit spaced closer together for longer life in asphalt and abrasive materials and less chance of hang-up on prestressed cable, loose rebar, and wire mesh, where these conditions create a problem for bits with wider spaces between segments.

FEATURES

- Excellent for drilling concrete with pretensioned cable or Concrete with wire mesh
- Increased number of segments for long life when drilling
- Asphalt and abrasive materials
- More Segments for longer life in asphalt
- Single pointed for faster starting of hole
- For drilling in high strength and heavily reinforced concrete

TECH SPECS

- 1-1/4"-7 thread
- Wet Only Use
- Silver soldered segments
- 8mm Segment height
- Single Pointed C-32 Segments



WET ONLY

C-32 Single Pointed Segments



.315" Segments




C-43 Asphalt & Prestressed
1-1/4"-7 thread .315" Segments

Diameter	Part No.
2"	D32124
2-1/4"	D32125
2-1/2"	D32126
3"	D32128
3-1/2"	D32130
4"	D32131
4-1/4"	D32132
4-1/2"	D32133

C-43 Asphalt & Prestressed
1-1/4"-7 thread .315" Segments

Diameter	Part No.
5"	D32135
5-1/2"	D32136
6"	D32138
6-1/4"	D32139
6-1/2"	D32140
7"	D32141
8"	D32142
10"	D32144

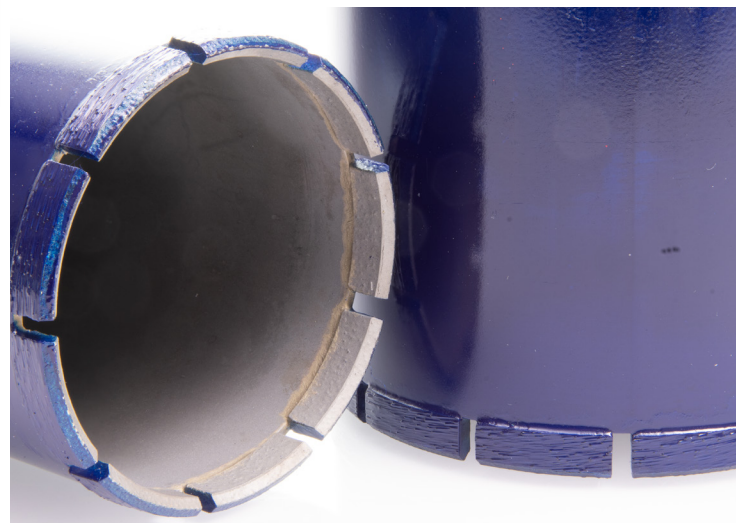

08/23/2023