




FPS PUMPS

Tsurumi 304 Stainless steel SQ2-2 Pump

The SQ2-2 series is constructed in 304 and 316 stainless steel and resin. Models have a water-cooled, top discharge design for applications where space is limited, operating while partially submerged or during short periods of dry running.

Liquid paraffin is used for lubrication oil which enables use in food processing and aquaculture. They are also suitable where corrosion and chemical resistance is needed at a higher head and greater volume than standard steel pumps. Can be used in industrial, trade, and domestic but it is not recommended for ponds or water features.

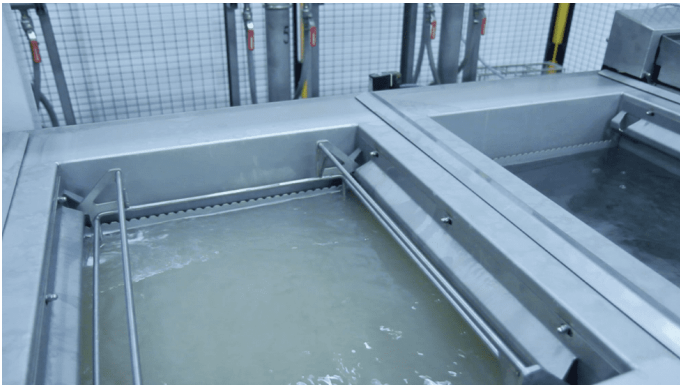

Model	50SQ2-2.4S	50SQ2-2.4	50SQ2-2.75
Manual or Auto	M	M	M
Outlet (mm)	50	50	50
kW	0.40	0.40	0.75
Volt	230	400	400
Flow Ltr/ min	240	240	300
Head/ m	10.5	10.5	14.5
free passage (mm)	6	6	6
Ø x H (mm)	180 x 366	180 x 366	180 x 388
Weight/ Kg	10.5	10.5	12

- Suitable for:**
- Chemical use
 - Corrosive use
 - Aquaculture
 - Food processing
 - Industry
 - Domestic

