




Component and Hardware

- 1-Rails: Made from 1 1/4" Schedule 40 pipe in 6061 T6 aluminum alloy.
- 2-Gate: Self-closing design.
- 3-Supports: Aluminum posts.
- 4-Brackets: Corner brackets for reinforcement.
- 5-Hinges: Stainless steel spring hinges.
- 6-Latch: Cast aluminum gate latch with a stainless-steel pin.

NOTES:

- Rail Height: The top of the rail should be set 42 inches above the roof surface or deck.
- Gate Orientation: The gate is designed to be left-handed.
- Fasteners: All fasteners are made of stainless steel.
- Package Contents: All parts and fasteners are included in the package.
- The cap flashing must be structurally sound to support the assembly.
- Finish: The components have a powder coat finish in RAL 1018, Safety Yellow.

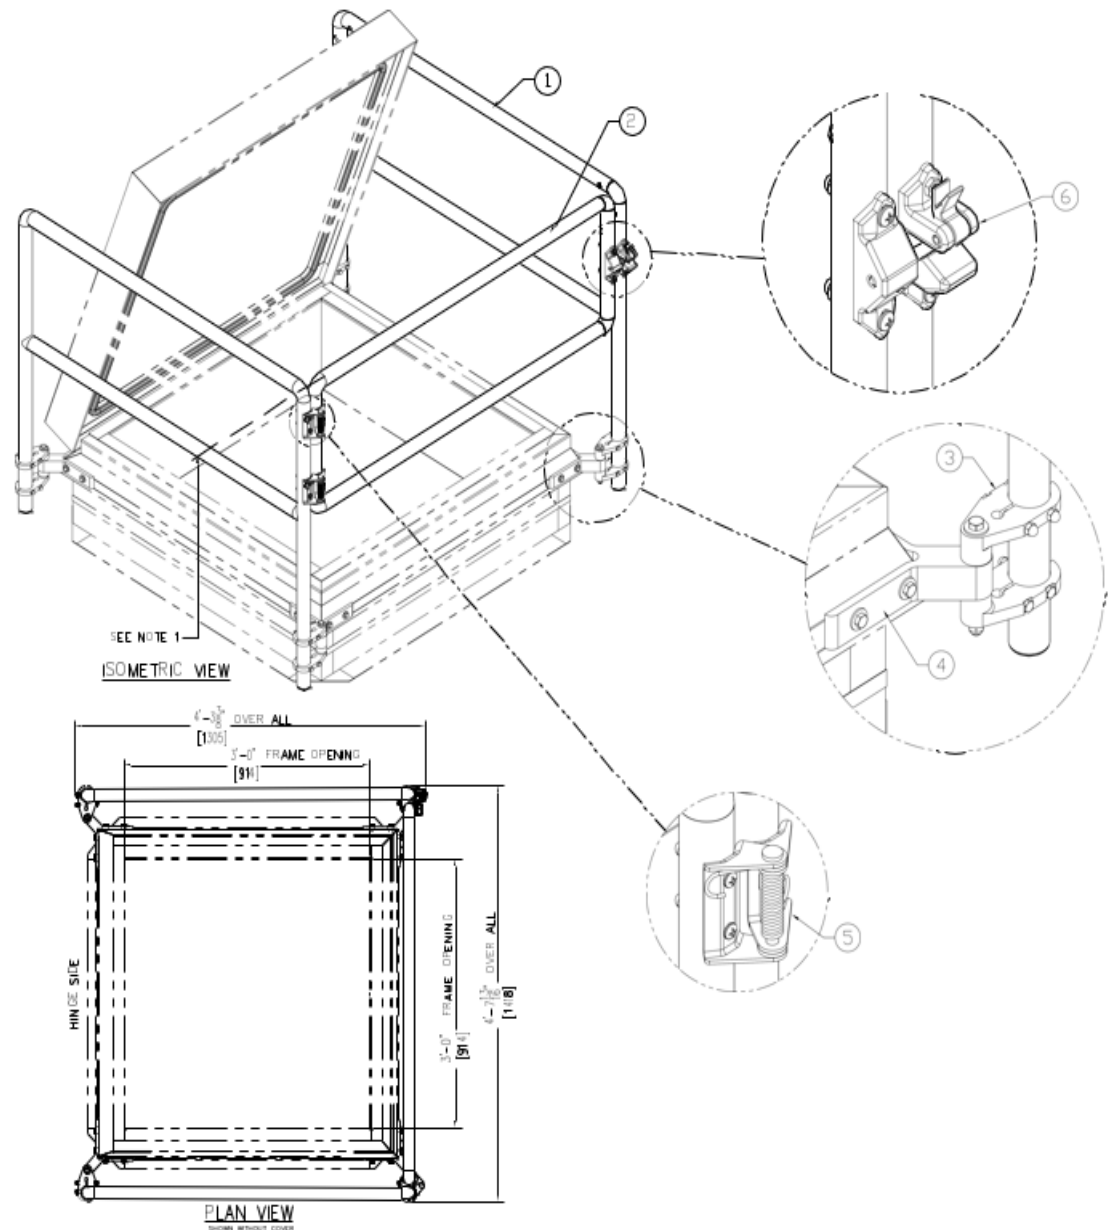

28 – 4120 Ridgeway Dr
Mississauga, Ontario, L5L 5S9
P 2899992334 - F 9052672777
info@taimco.ca

Hatch Guide Walk Railing System Model GWH3636

- | | |
|---|---|
| _____ QUANTITY | ☐ ALTERNATE BOTTOM SUPPORT |
| ☐ SECURITY DOOR | ☐ MILL FINISH ☐ BRONZE ANODIZED |
| ☐ INTERMEDIATE BRACKET | ☐ POWDER COATING ☐ CLEAR ANODIZED |

SALE NO.

DRAWN :

DATE :

SHEET : _____ OF _____