

### Questions/Comments:

Visit us at [www.vagabondmotorsports.com](http://www.vagabondmotorsports.com)

Or email [sales@vagabondmotorsports.com](mailto:sales@vagabondmotorsports.com)

P/N: VM-HG740



## ***Honda Grom/MSX125 (2017+) License Plate Mount Installation Instructions***

### **TOOLS REQUIRED:**

- Ratchet (1/4" or 3/8" drive) and extension
- 10mm hex wrench
- 12mm hex socket
- Phillips screwdriver
- Needle nose pliers

### **PARTS INCLUDED:**

- License Plate Mount
- Fender Eliminator Trim Plate
- 4X M8 flanged nuts
- 2X Stainless steel washers (not required)
- 2X Rubber bumpers
- Rubber grommet

### **INSTALLATION NOTE:**



Please note that this part is only meant to cleanly mount your license plate and does not allow for mounting of turn signals or license plate lights. It is intended to be used with integrated tail lights, available from a variety of vendors. The installation may render your motorcycle illegal for highway use depending on local requirements for motorcycle lights. If this is a problem for you, please return this part for a full refund before completing the installation

### **INSTALLATION VIDEO:**

We've created a YouTube video to help explain the installation steps in more detail. Search "Vagabond Motorsports 2017 Honda Grom License Plate Mount Install" or use the link: <https://www.youtube.com/watch?v=LCrodReP5WY>

### **INSTALLATION STEPS:**

1. Remove the rear seat (key in left side of frame)
2. Unplug the license plate light and turn signal electrical connector (black wire loom with white 4-pin connector near the battery, FIGURE 1) and unclip the wire loom from the plastic clips.
3. Remove the four bolts (12mm socket, FIGURE 2) that attach the rear fender to the frame. Be careful not to drop the bolts down the holes in the sub frame tubes. Placing tape over the subframe holes will help prevent this.
4. Slide the rear fender assembly rearward and remove from motorcycle.
5. Remove the license plate from the OEM rear fender. (2X Phillips head screws and 10mm lock nuts, hardware may vary dealer to dealer). This hardware will be reused to mount the license plate to the fender eliminator so do not discard.
6. Install the integrated tail light of your choice by following the manufacturer provided installation instructions. This process involves removal and replacement of the factory brake light and some level of wiring, and the tools required may not be included in those listed above.
7. If you are going to run a 3<sup>rd</sup> party license plate light, the supplied rubber grommet may be used in the oval slot in the trim plate to prevent wire chaffing.
8. Install the trim plate and license plate mount onto the motorcycle by placing the 4 threaded studs through the holes on the underside of the motorcycle and installing the 4 flanged nuts included in this kit with the 12mm socket.
9. Re-install rear seat and license plate with the original dealer-supplied hardware.
10. Perform a system test to ensure all lights are functional and double check that all hardware is tight.

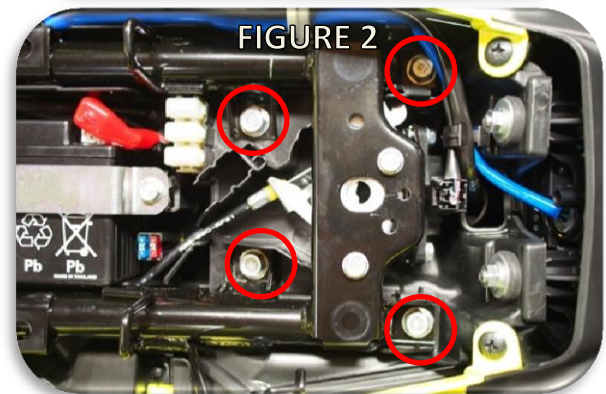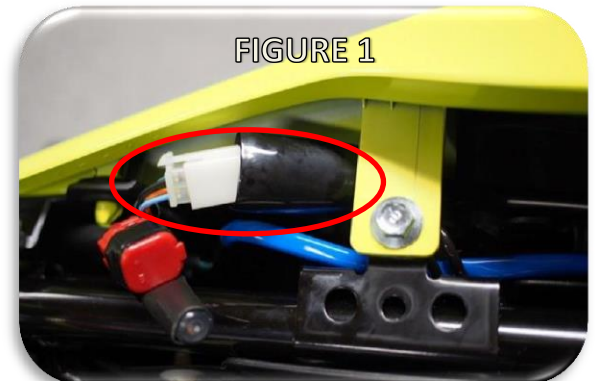

### **TERMS & CONDITIONS**

**Legal Notice:** The purchaser and/or user of any Vagabond Motorsports, LLC branded parts releases Vagabond Motorsports, LLC from all liabilities pertaining to use of the parts. The user acknowledges that any modification, alteration or change to a motorized vehicle may increase the risk of accident and/or injury. Additionally, the user acknowledges any change may render the motorized vehicle illegal for use in public roads. **Warranties:** All Vagabond Motorsports, LLC branded products carry a one-year limited liability against workmanship and material defects. This Warranty is provided to the original purchaser of the products. **Return Policy:** All approved returns must be in new and unused condition within 90 days of purchase.