


Product Bulletin

7/16/2020

Subject: Add optional Lock and Selector Valve Kit to existing Trailer Jack / Hoist installation

⚠ WARNING To safely install lock and selector valves, all hydraulic pressure must be released from the system. The trailer must be supported so all weight is removed from the trailer jack and the cylinder must be in the full down position.

Single Trailer Jack and Hoist Cylinder

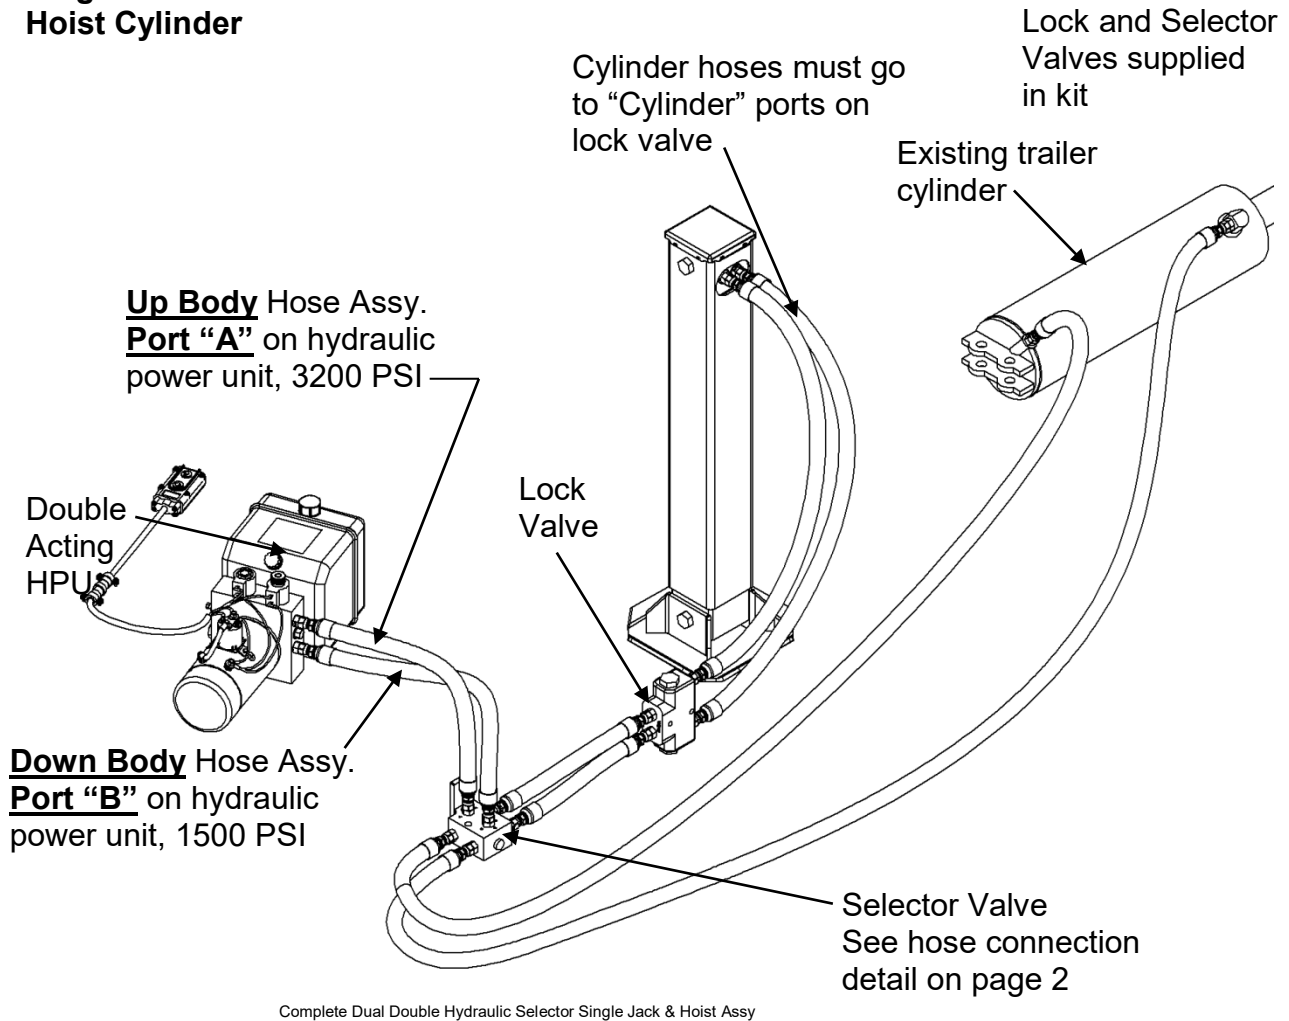

**Dual Trailer Jacks and
Hoist Cylinder**

Cylinder hoses must
connect to "Cylinder"
ports on lock valve

Existing trailer
cylinder


Up Body Hose Assy.
Port "A" on hydraulic
power unit, 3200 PSI

Double acting
HPU

Down Body Hose Assy.
Port "B" on hydraulic
power unit, 1500 PSI

Lock, Selector
Valve and 1 foot
long hoses
supplied in kit

Complete Dual Double Hydraulic
Jack & Hoist Assy

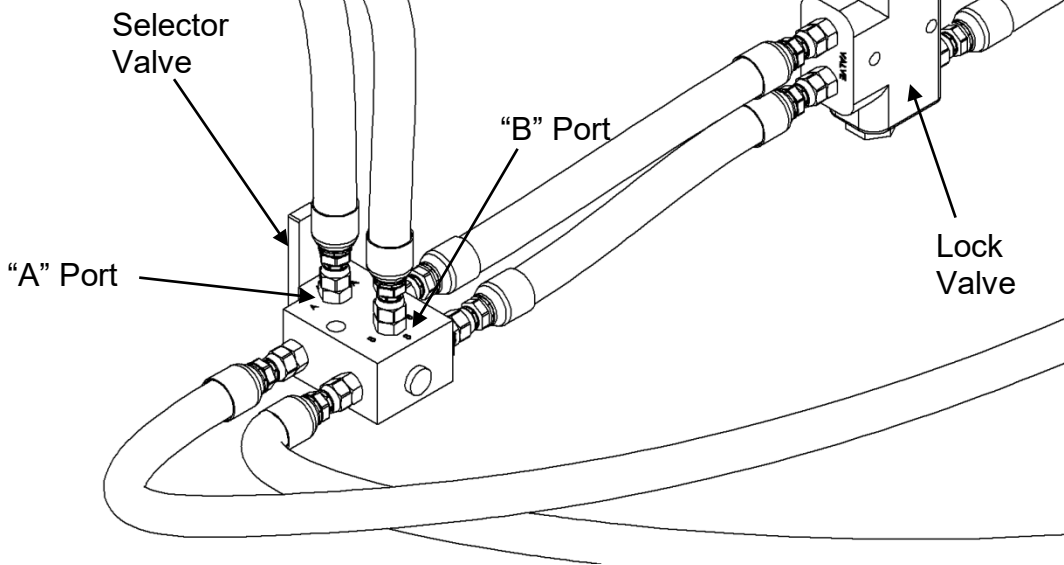

Complete Dual Double Selector Valve Hydraulic Jack & Hoist Assembly Detail 1