


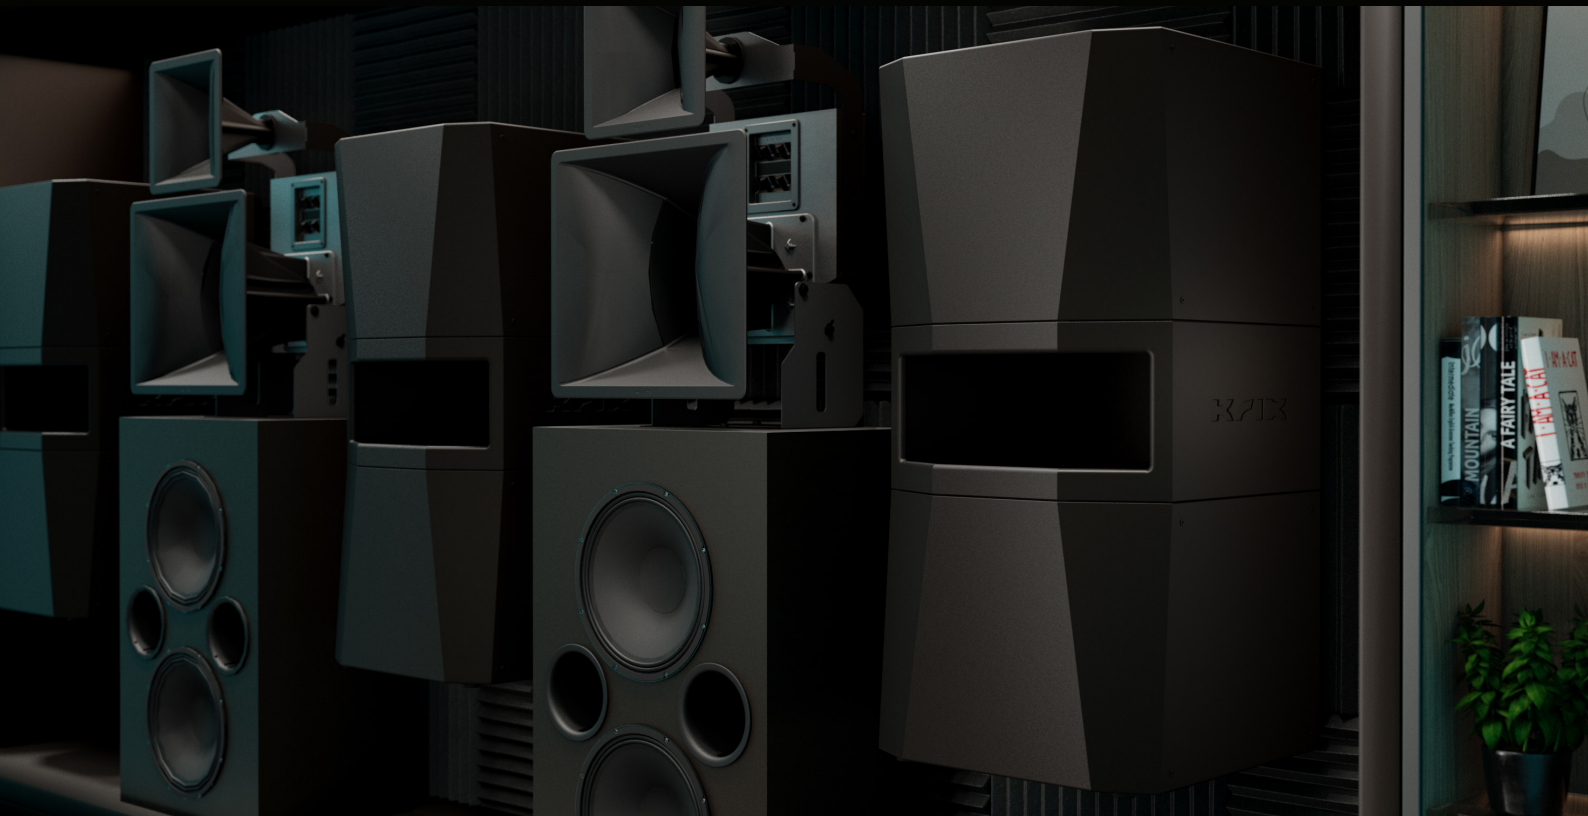

FEEL THE POWER OF BASS

Dive into the depths of sound experience with the UCX-218 subwoofer, engineered to deliver unparalleled low-frequency performance. With its dual 18-inch high-excursion drivers, this subwoofer effortlessly reaches infra-sonic frequencies, immersing you in bass so deep and precise that it's not just heard, but also felt. The opposing driver configuration eliminates transfers of unwanted vibrations into your dedicated cinema room.

Whether you're experiencing the chest thumping bass of an action movie or the subtle rumblings of distant thunder, the UCX-218 brings your content to life with clarity and power. Designed for those who demand nothing but the best, this subwoofer is more than just bass, it's a gateway to a truly cinematic or concert-grade sound experience in your own retreat.

For the ultimate cinema experience at home, play it through Krix.



UCX-218 horizontal orientation



Infra-bass performance

Reproduces extremely low-frequency sounds to create a tactile audio experience that you can feel.



Dual opposing drivers

Unwanted mechanical vibrations are eliminated, ensuring more precise and uncoloured bass.



Versatile placement


The cabinet can be positioned either vertically or horizontally. This makes it ideal for single or multi subwoofer layouts.



Australian made

Krix has proudly engineered and manufactured speakers in Australia since 1974.

DIMENSIONS

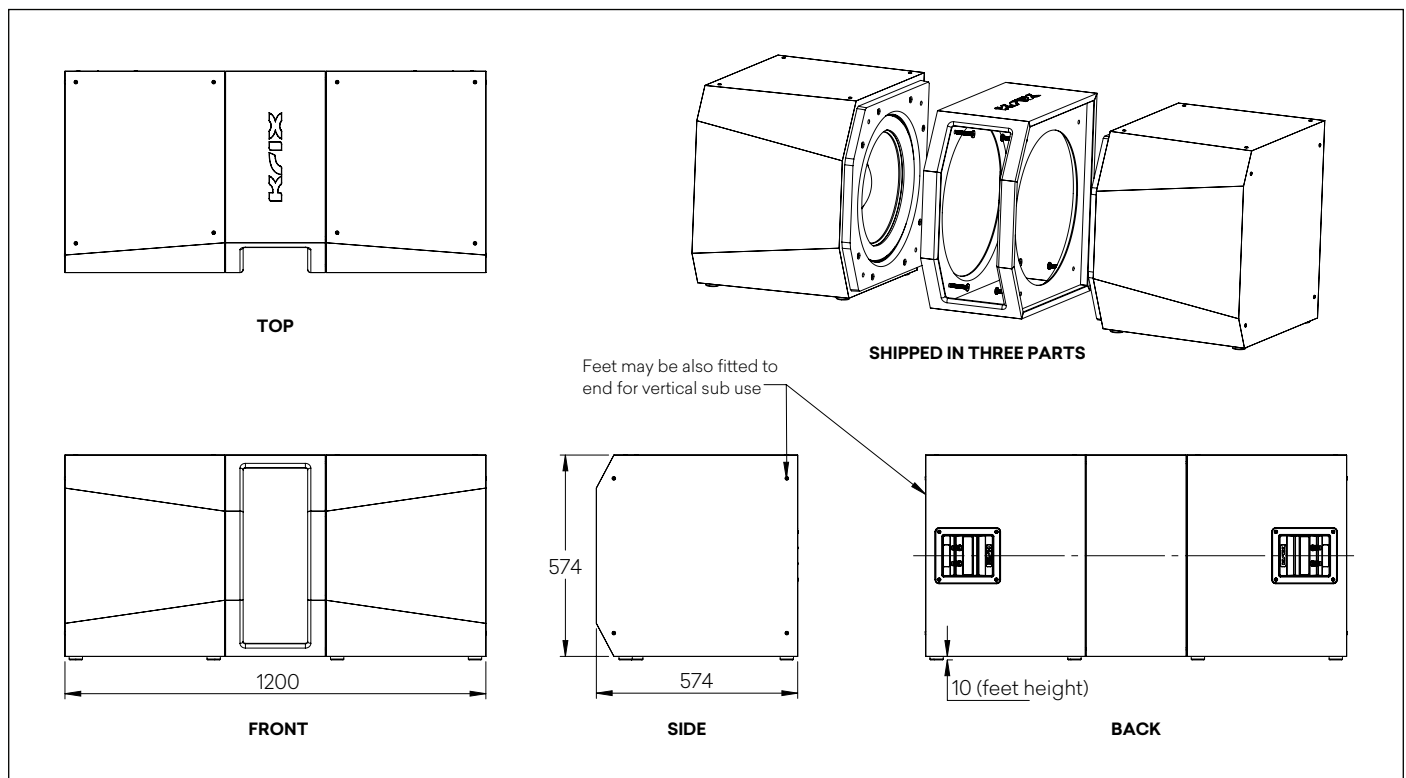

UCX-218

PERFORMANCE

Frequency range	10Hz - 200Hz (with DSP) 15Hz -3dB, 13Hz-6dB (with DSP)		
Power handling	2 x 1250 Watts Continuous (71Vrms) 2 x 2500 Watts Program (100Vrms) 2 x 5000 Watts Peak (141Vrms $\equiv$ 200Vpeak)		
Recommended amplifier	2 x 1500-3000 Watts into 4 Ohms or 1 x 3000-6000 Watts into 2 Ohms (parallel) Approved amplifier with DSP required, consult with a Krix Certified System Designer.		
Sensitivity (without DSP) 2.83V @ 1m (to compensate for reduced sensitivity at low frequencies requires Krix DSP settings)	Frequency	Half space	Free space
Maximum sound level referred to 1m measured using CTA-2010-B methodology	10Hz	81dB	75dB
	20Hz	93dB	87dB
	40Hz	102dB	96dB
	80Hz	106dB	100dB
	Frequency	Half space	
	10Hz	100dBpk	
	12.5Hz	108dBpk	
	16Hz	112dBpk	
	20Hz	118dBpk	
	25Hz	126dBpk	
	31.5Hz	128dBpk	
	40Hz	129dBpk	
	50Hz	134dBpk	
	63Hz	132dBpk	
	80Hz	131dBpk	
	100Hz	132dBpk	
Impedance	4 + 4 Ohms		
Configuration	Dual opposing woofers		

DRIVERS

Low frequency driver	Dual 460mm (18") treated paper cone driver. 100mm (4") voice coil, neodymium magnet and demodulating ring for low distortion. 50mm peak to peak displacement
-----------------------------	---

ENCLOSURE AND TERMINALS

Enclosure type	Sealed
Enclosure finish	Durable textured black paint
Input terminals	Krix proprietary, high current binding posts featuring an 8mm hole to accept large diameter cable. High visibility polarity indicators.

DIMENSIONS

Horizontal orientation	584 high (inc feet) x 1200 wide x 574 deep (mm)
Vertical orientation	1210 high (inc feet) x 574 wide x 574 deep (mm)

WEIGHT

UCX-218.D	40 kg driver assembly (2 per UCX-218)
UCX-218.M	11 kg manifold assembly
UCX-218	91 kg total weight

NOTES

A separate power amplifier is required for this subwoofer which will connect to the LFE output of an AV processor or receiver. Consult with a Krix Certified System Designer for approved power amplifier list.