



SPECIFICATION

LED Linear Light



Hanging Accessories



Wall Mount Accessories



Wire Nuts

Maximum Overall	A	B	C
40w	48.3in	3.19in	3.19in
64w	96.1in	3.19in	3.19in



Input Voltage:	120-277VAC
Lumens:	130LM/W
Color Temperature:	3000K/4000K/5000K (3CCT)
Operating Frequency:	50/60Hz
Working Temperature:	-4F ~ 105F
Color Rendering Index:	>80
Life Span:	Over 50,000
Environment Locations:	IP20 (Indoor Use Only)
Beam Angle:	110°
PF:	0.95
Dimming:	0-10V Dimmable
Housing:	Aluminum Heatsink for Efficient Heat Dissipation.

Linkable:

Mount Option:


With wire harness connection kit included for connecting power between Surface or Suspension

PACKAGING


Fixture	Outer box (L*W*H)(In)	Qty/Ctn (pcs)	Package Weight(lbs)
4FT	50.59*7.48*7.68	4	21.83
8FT	98.62*7.48*7.68	4	41.01

INSTALLATION


A Surface mount installation

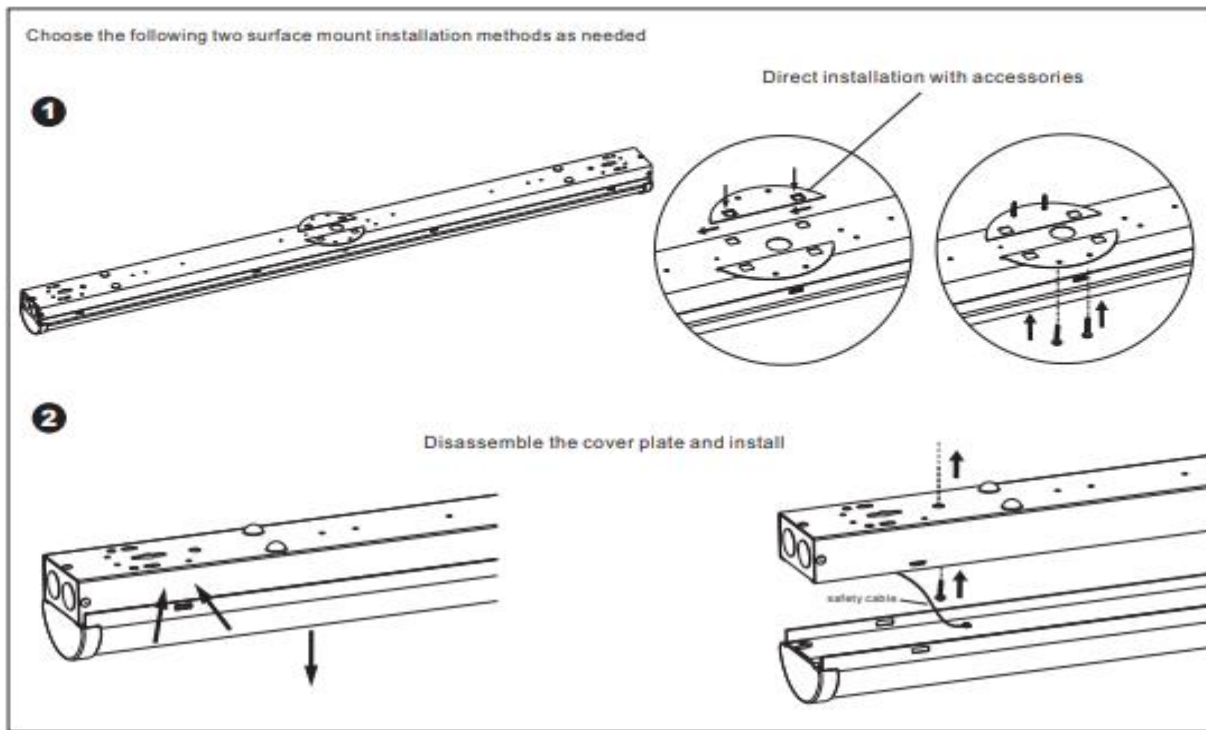

B Suspension installation

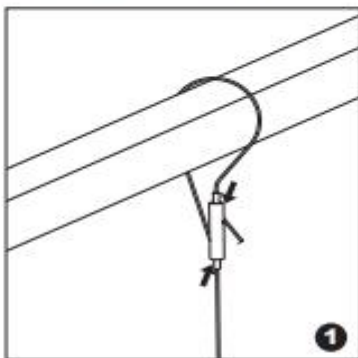

The upper connection

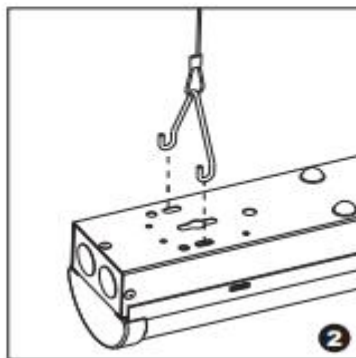

Connection to the luminaire

