


SPECIFICATION

LED Flood Light

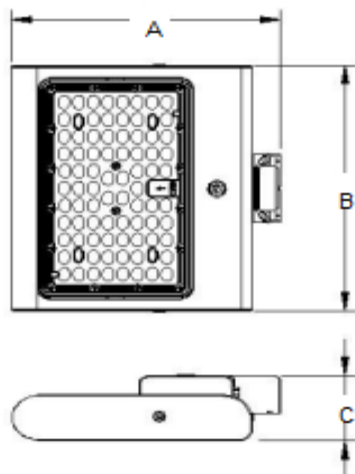

Maximum Overall	A	B	C
150W	12 3/8in	12 5/8in	3 3/8in
200W	13 3/4in	13 1/8in	2in
300W	19 5/8in	12 5/8in	3 3/4in

Input Voltage:	100-277V
Lumens:	150W = 21000 200W = 28000 300W = 43500
Color Temperature:	5700K
Operating Frequency:	50/60Hz
Surge Protection:	10KV
Working Temperature:	-40F~104F
LED:	LUMILEDS 2835
Color Rendering Index:	>70
Environment Locations:	Suitable for wet locations

Aluminum LED Board:	High conductive, waterproof, aging resistance, salt mist resistance, ensures the safety and long life span
Optical Lens:	High light transmittance PC, anti-UV and flame resistant
Photocell:	Optional

Housing: ADC12 Aluminum heat sink,
outdoor powder coating

PACKAGING

Fixture	Outer box (L*W*H)(In)	Qty/Ctn (pcs)	G.W/pcs(lbs)
150w	15.63*14.29*4.29	1	7.93
200W	18.34*15*4.29	1	9.79
300w	22.35*14.76*6.10	1	18.52

INSTALLATION

