



# SPECIFICATION

## UFO LED HIGH BAY LIGHT



Maximum overall	A	B	C
100W	Ø257mm	28mm	98mm
150W	Ø296mm	28mm	98mm
200W	Ø358mm	28mm	98mm



## FEATURES

Input voltage: AC100-277V

Operating frequency: 50/60Hz

Power factor:  $\geq 0.95$

Working temperature range:  $-40^{\circ}\text{C} \sim +45^{\circ}\text{C}$

Storage temperature range:  $-40^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Color Temp: 3000K~6500K

THD:  $< 20\%$

IP Rating: IP65



CRI:  $> 80$

Beam angle: 120 Degree

- Light efficiency: 130lm/W
- Life span: 50,000 hours+



## PARAMETER

Product code	Certification	LED Module	Wattage	Input Current	Lumens	Packing/carton	Weight/carton
ZS-HB100-XX23-CC	ETL	144	100W	120V/0.95A 277V/0.4A	13000lm	L290*W290*H200mm(4PCS) 1X40HQ Loading=16992pcs	5kgs
						L290*W290*H290mm(6PCS) 1X40HQ Loading=17712pcs	7.5kgs
ZS-HB150-XX23-CC	ETL	216	150W	120V/1.4A 277V/0.6A	19500lm	L330*W330*H110mm(2PCS) 1X40HQ Loading=12096pcs	3.7kgs
						L330*W330*H290mm(6PCS) 1X40HQ Loading=13824pcs	9.7kgs
ZS-HB200-XX23-CC	ETL	288	200W	120V/1.85A 277V/0.8A	26000lm	L390*W390*H110mm(2PCS) 1X40HQ Loading=8640pcs	5.2kgs
						L390*W390*H290mm(6PCS) 1X40HQ Loading=8856pcs	13.8kgs

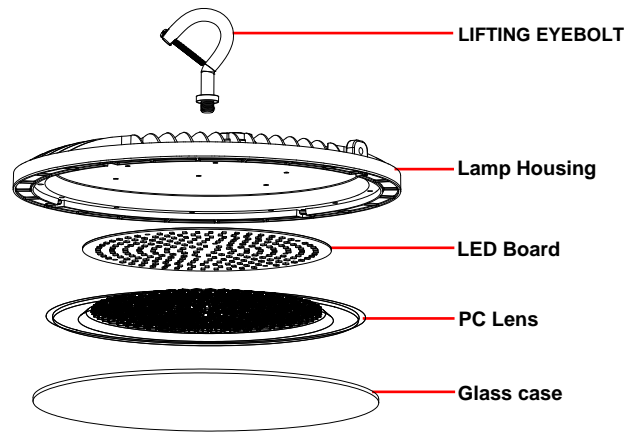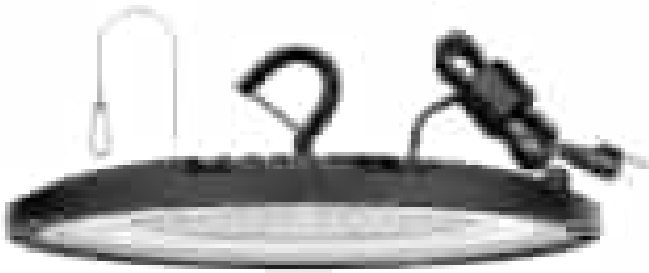

## INSTALLATION INSTRUCTION

### Hook Mount

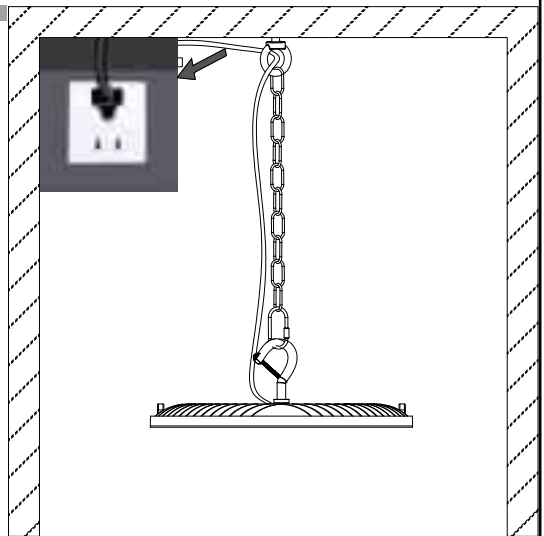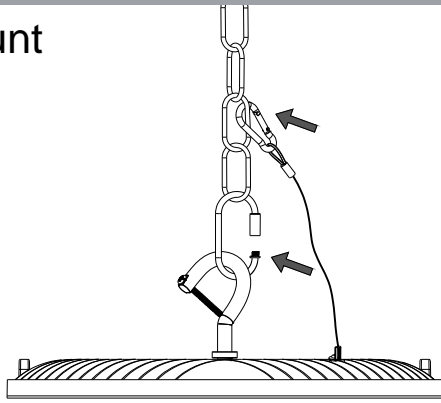

### Warning:

- 1.Screw the hook until it's tight. (The hook is long so it won't go all the way)
- 2.Please make sure the power is off before installation.
- 3.The installation can only be done by certified electricians.
- 4.Product rated voltage is 100~277Volts. Please make sure voltage meets the requirements
- 5.please don't use chemicals to clean the lighting surface.