

borg &
overström



Distinctive
by design.

b3

borg&
overström

First choice for education and healthcare

Built at an ideal height for both adults and children the B3 also features an ultra-hygienic touch-sensitive control panel, the biggest dispense area in its class for bottles and an integrated cup dispenser and a tamper-proof rear cover guard for safety.

Reasons to choose

- Ultra-hygienic touch sensitive control panel
- High-capacity dispense area for bottles and jugs
- Integrated cup dispenser
- Sealed, hygienic, direct-chill cooling system

borgandoverstrom.com



Distinctive
by design.

b3

borg & overström

Water system



Direct Chill

Configurations



Floorstanding

Water options



Chilled



Ambient



Hot



Sparkling

Available colours



Silver



Black

borgandoverstrom.com



Distinctive
by design.

b3

Borg & Overström Totality®



Driven by a relentless pursuit of excellence, Borg & Overström Totality® is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Biofilm, limescale and impact resistant epoxy resin panel finish

Providing an increased level of hygiene and longevity, Fynil® is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



World-class filtration

For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.



Laboratory certified 99.999% bacteria-reduced

Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-reducing process, Sterizen®.



Ultra-violet sterilising system


For added hygiene confidence, appliances can be fitted with Viovandit™ – an ultra-violet sterilisation process that reduces water-borne bacteria.

Distinctive
by design.

B3 models

	Floorstanding W325xD380xH1065mm	Water system	Dispense height	Max power consumption	Silver	Black
Power requirements Hertz 50/Volts 220-240	Chilled & Ambient	Direct Chill	265mm	100W	104021	104023
Chilled temperature Min 2°C/Max 11°C	Chilled, Hot & Ambient	Direct Chill	265mm	550W	104031	104033
Hot temperature Max 92°C	Chilled, Ambient & Sparkling	Direct Chill	265mm	140W	104051	104053
Throughput litres per hour Chilled & Sparkling 30/Hot 6	Chilled, Hot & Sparkling	Direct Chill	265mm	640W	104041	104043

Distinctive
by design.

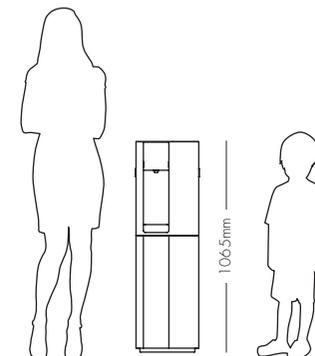

Additions for B3



Biodegradable paper cups
Environmentally-friendly disposable cups designed to fit Borg & Overström cup dispensers perfectly.



Personal drinking bottles
500ml capacity in black or grey frosted soft-touch finish. Comes with quick-release leak-proof cap and carry strap.



500ml Swing-top bottles
Suitable for dishwashers and bottlewashers. Perfect fit for the B3. Stylish swing-top lid.



Sanitisation kit
Six monthly sanitising cycles ensure appliances function at the optimum hygiene levels.



Waste kit overflow sensor
Featuring an audible high-water level alarm to prevent the waste tank from overflowing.



Leak detection kit
Featuring a moisture sensor that shuts the water supply in the unlikely event of a leak. Included as standard on floorstanding models.



Install kit with 3M filter
Install appliances simply and effectively in a wide range of applications. Complete with a 3M filter.



Ultra-violet filter kit
Complete Vivandri™ filter kit to assist in water purification and removal of unwanted micro-organisms.



Wall bracket kit
For added security, use the wall bracket set to anchor your watercooler back to the wall. Simple to fit and unobtrusive.



Rear cover kit
Tamper-proof rear cover anchors the appliance to the wall and protects plumbing and electrical connections. Ideal for public areas.

Distinctive
by design.

borg&
overström

Book a visit to the Borg & Overström Academy
for a personal demonstration of the B3

Talk to an adviser
+44 (0) 1362 695 006
sales@borgandoverstrom.com