

ArcticChill 98

Direct Chill Cooler

The ArcticChill 98
Direct Chill Cooler
With Ambient
Water



23cm Dispensing
Height To Fill
Bottles

- Chiller capacity: 30 - 40 ltrs of below 12°C chilled water/hour
- Ambient capacity: virtually unlimited
- Can be fitted with drip tray overflow kits & mains drainage
- Fits our standard cowling and wall bracket
- FloodGuard inlet solenoid protects the cooler against large scale flooding
- Impressive 23cm dispensing height

AAFIRST
WATER COOLERS
& BOILERS



CE RoHS

refreshingly different

ArcticChill 98

Direct Chill Cooler



Key Feature

First Select Ambient Or Cold, Then Hold The Dispensing Button Down

Accessories For The ArcticChill 98

Installation Rail With Filter. Includes Compression Fitting, 1-Micron Green Filter, Water Block, Copper Pressure Reducing Valve & Non-Return Valve



FloodGuard - Closed Inlet Solenoid Only Opens To Allow Water Into The Cooler, When Water Is Dispensed. By Remaining Closed All Other Times It Protects The Cooler Against Leaks



Filter Housing With Carbon Block Candle & Nanofilter



Mains Drainage - Connect The Drip Tray To Mains Drainage. Can Be Supplied With A Pump, To Pump The Water Over 50m & A Rise Of 5m



Cowling To Fix The Cooler Securely To The Wall. (Supplied Separately)




10 Litre Overflow System With Alarm To Signal When Full. (Factory Fitted)



KLARAN WS UVC LED SHIELD For Direct Chill/ Ice Bank Coolers

- The KLARAN WS UVC LED Shield represents a major technological break-through by providing 24/7 protection against bacterial contamination
- The revolutionary KLARAN WS UVC LED Shield destroys 99%+ of Cryptosporidium, Giardia, E-Coli, Pseudomonas, Legionella and other Bacteria
- Simple to Install and Maintenance Free, which is in stark contrast to conventional UV light systems, the KLARAN WS UVC LED Shield adds real value to your Water Cooler offer
- KLARAN WS UVC LED Shield can be supplied factory installed into an AA Water Cooler, or can be provided as a unit for self-installation

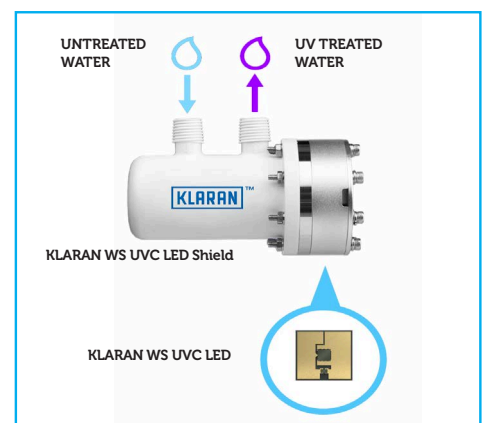

Description	Hourly Output		Temp	Dimensions H X W X D (mm)	Weight (Kg)
	Chilled	Ambient			
POU Floor Standing	30-40 Ltrs/Hr	Indefinite	Below 12C	1135 x 340 x 340	25

AAFIRST
WATER COOLERS
& BOILERS

www.aafirst.co.uk