

ArcticChill 88


Exceptional Capacity

Delivers 30 - 40 Litres
Per Hour Of Chilled
Water Below 12°C

23cm Dispensing
Height To Fill
Bottles



AAFIRST
WATER COOLERS
& BOILERS



- Direct chill cold water cooler
- Single dispensing button for Chilled water
- Can be fitted with overflow kits & mains drainage
- Fits our standard coving and wall Bracket
- WRAS approved
- FloodGuard inlet solenoid protects the cooler against large scale flooding
- Impressive 23cm dispensing height

refreshingly different

ArcticChill 88

Exceptional Capacity

Accessories For The ArcticChill 88

A Pumped Main Drainage System Pumps The Waste Water From The Drip Tray Over A Distance Of 100m & A Rise Of 5m. (Factory Installed).



Filter Housing With Carbon Block Candle & Nanofilter.



Cowling To Fix The Cooler Securely To The Wall (Supplied Separately).



Installation Rail With Filter. Includes Compression Fitting, 1-Micron Green Filter, Water Block, Copper Pressure Reducing Valve & Non-Return Valve.



10 Litre Overflow System With Alarm To Signal When Full. (Factory Fitted).




FloodGuard - Inlet Solenoid Only Opens To Allow Water Into The Cooler, When Water Is Dispensed. By Remaining Closed All Other Times It Protects The Cooler Against Leaks.



3 Litre Overflow Kit Connects The Drip Tray To A 3 Litre Alarmed Overflow Container. The Container Has A Tap To Empty Without Removing It.




Mains Drainage - Connect The Drip Tray To Mains Drainage. Can Be Supplied With A Pump, To Pump The Water Over 50m & A Rise Of 5m.



KLARAN WS UVC LED SHIELD
For Direct Chill/ Ice Bank Coolers

- The KLARAN WS UVC LED Shield represents a major technological break-through by providing 24/7 protection against bacterial contamination
- The revolutionary KLARAN WS UVC LED Shield destroys 99%+ of Cryptosporidium, Giardia, E-Coli, Pseudomonas, Legionella and other Bacteria
- Simple to Install and Maintenance Free, which is in stark contrast to conventional UV light systems, the KLARAN WS UVC LED Shield adds real value to your Water Cooler offer
- KLARAN WS UVC LED Shield can be supplied factory installed into an AA Water Cooler, or can be provided as a unit for self-installation

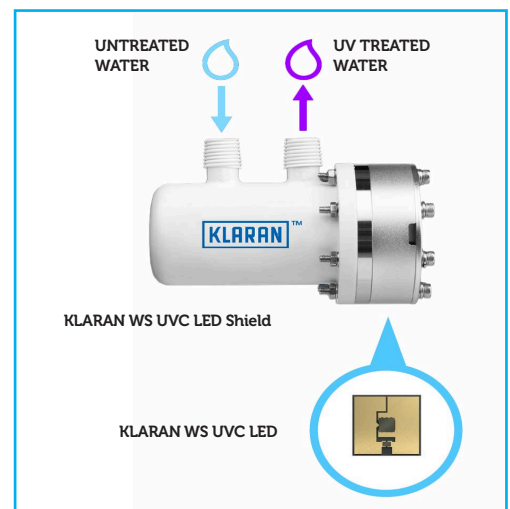

Description	Dimensions H X W X D (MM)	Weight (Kg)
POU Floor Standing	1135 x 340 x 340	25
POU Table Top	460 x 340 x 340	16

AAFIRST
WATER COOLERS
& BOILERS

www.aafirst.co.uk