



## BOOM Configuration B

The advanced technology of the new BOOM modular lightbox system combines innovation with intuition. Toolless down to its feet, BOOM is designed to help heighten your display experience. Magnetic electrical connectors light up the UL certified LED lights that come pre-installed in the profiles. Electrical wires stay hidden from view. Edge-to-edge customizable SEG backlit fabric graphics cover the front and back of the aluminum frame. Portable, configurable, desirable, BOOM is a lightbox unlike the others. BOOM is so well thought out, even its durable foam cut carry bag is made distinctly to keep all parts and pieces protected and organized.

### FEATURES

#### Tool Free Assembly



#### Clean Cable Management



#### Magnetic Wire Connection



#### Tool Free Foot Connection





**Display Dimensions:** 236"W x 88.25"H x 16.5"D

**Graphic Material:** Dye Sub Backlit Fabric

**Graphic Finishing:** Silicone beading sewn onto edge of graphic

**Display Construction:** Aluminum extrusion frame with plastic components

### BOOM WEIGHT AND DIMENSIONS

2 Large Frames	36 LBS - 54.5"W X 15.5"H X 6.75"D (X 2)	Graphic Dimensions: 118.625"W x 88.625"H
	32 LBS - 45.5"W X 15.5"H X 6.75"D (X 2)	




INDOOR USE



DOUBLE SIDED



WARRANTY

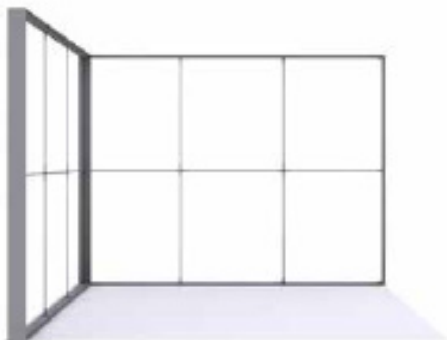

#### LUMENS

Voltage (V)	24
Power (W)	540
LM/W	130
Total LM	70200
AVG LM	5850
CU	.8
EAV	4680

#### LED LIGHT SPECIFICATION

Brand	Osram
Power	3W
cct (color temp)	6800K
average beam angel	20°
lm/w	130
avg lm/m²	4800 - 5800
voltage input	24V

#### TRANSFORMER SPECIFICATION

Power Rate 2 Transformers	95W, 252W
Certificates	UL, CE, GEM
Voltage Input	100 - 240
Voltage Output	24V



## TURN AROUND TIME

3-4 business days after approval


1 - 5 business days for shipping

# BOOM

## Configuration B - Part List



QTY: 2  
9.8 x 7.4 Ft. BOOM Modular  
Lightbox Display



QTY: 2  
BOOM ILCON

