
## Performance Curve - S8L/S8LX

RPM: 870 DISCHARGE: 8" SOLIDS: 4"

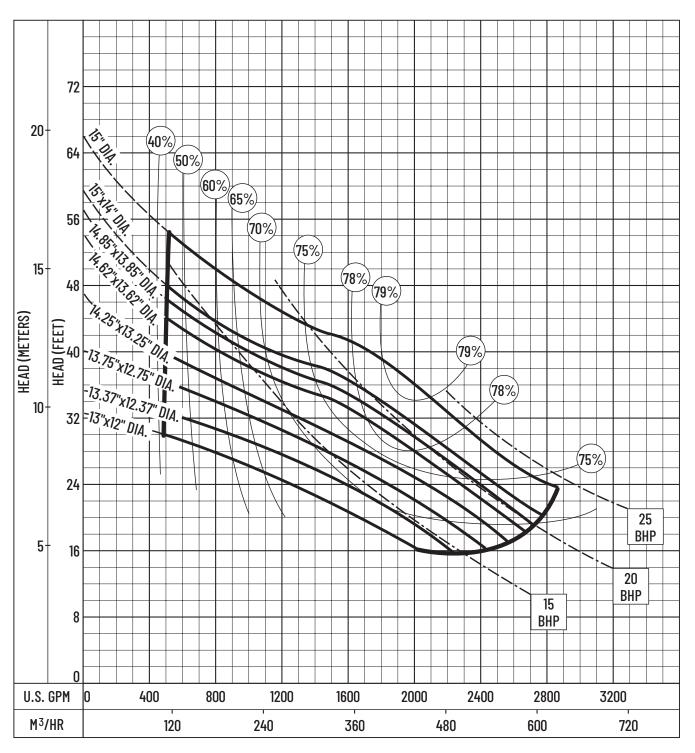

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

PENTAIR HYDROMATIC

Conditions of Service:

GPM: \_\_\_\_\_ TDH: \_\_\_\_